

LOW-VOLTAGE

CURRENT TRANSFORMERS ►



► LUMEL 4.0 - PLANT OF NEW TECHNOLOGIES



Our new plant built in 2020 powered by a 125 kW Lumel photovoltaic system.

Plant area Lumel S.A. - 3639 m².

Plant area Lumel Arena
(sports and recreation facility for employees
and their families) - 1007 m².

Current transformers summary.....	4
General overview of current transformers.....	6
Instrument security factor.....	8
LCTM - wound primary series.....	14
LCTR - round conductor series.....	15
LCTB 45 - busbar series.....	17
LCTB 50 - busbar series.....	18
LCTB 62 - busbar series.....	20
LCTB 74 - busbar series.....	22
LCTB 86 - busbar series.....	24
LCTB 100 - busbar series.....	26
LCTB 104 - busbar series.....	27
LCTB 140 - busbar series.....	28
LCTB 225 - busbar series.....	30
LCTS - split core - NEW - COMPACT VERSION.....	31
LCTP - 3-phase current transformers.....	32
LRC - resin cast current transformers.....	34
LU01 - summation current transformers.....	38
LW - round current transformers.....	41
LE - round current transformers.....	44
Accessories.....	46

3 YEAR
WARRANTY

shop.lumel.com.pl



ePLAN

CURRENT TRANSFORMERS SUMMARY

			Range of primary currents									
Hole diameter/ Busbar dimensions	Transformer type	Page no.	Class 0.25		Class 0.2		Class 0.5S		Class 0.5		Class 1	
			min	max	min	max	min	max	min	max	min	max
Wound primary series												
N/A	LCTM 62/W(40)	14	-	-	1 A	30 A	-	-	1 A	30 A	1 A	30 A
N/A	LCTM 74/W(40)	14	-	-	1 A	60 A	-	-	1 A	60 A	1 A	60 A
Current transformers with window for round conductor or busbar												
Ø 14	LCTR 45/14(40)	15	-	-	-	-	-	-	80 A	300 A	30 A	300 A
Ø 14	LCTR 50/14(30)	15	-	-	-	-	-	-	100 A	300 A	40 A	300 A
Ø 14	LCTR 50/14(50)	15	-	-	-	-	-	-	50 A	300 A	30 A	300 A
Ø 22	LCTR 62/R(40)	15	-	-	100 A	600 A	-	-	75 A	600 A	50 A	600 A
Ø 20 / 20 x 10	LCTB 45/21(40)	17	-	-	-	-	-	-	80 A	400 A	50 A	400 A
Ø 21 / 20 x 10	LCTB 50/21(30)	18	-	-	-	-	-	-	80 A	400 A	50 A	400 A
Ø 26 / 30 x 10	LCTB 50/30(30)	18	-	-	-	-	-	-	100 A	600 A	75 A	600 A
Ø 21 / 20 x 10	LCTB 50/21(50)	18	-	-	-	-	-	-	50 A	400 A	50 A	400 A
Ø 26 / 30 x 10	LCTB 50/30(50)	18	-	-	-	-	-	-	100 A	600 A	50 A	600 A
20 x 12	LCTB 62/20(40)	20	100 A	400 A	100 A	400 A	100 A	400 A	75 A	400 A	50 A	400 A
Ø 30 / 30 x 10	LCTB 62/30(40)	20	100 A	800 A	100 A	800 A	100 A	800 A	100 A	800 A	50 A	800 A
Ø 28 / 30 x 10	LCTB 62/30(50)	20	100 A	800 A	100 A	800 A	100 A	800 A	75 A	800 A	50 A	800 A
Ø 31 / 40 x 10	LCTB 62/40(40)	20	200 A	800 A	200 A	800 A	200 A	800 A	200 A	800 A	100 A	800 A
Ø 20 / 20 x 10	LCTB 74/20(45)	22	100 A	400 A	100 A	400 A	100 A	400 A	75 A	400 A	40 A	400 A
Ø 26 / 30 x 15	LCTB 74/30(45)	22	100 A	800 A	100 A	800 A	100 A	800 A	75 A	800 A	40 A	800 A
Ø 35 / 40 x 12	LCTB 74/40(45)	22	200 A	1000 A	200 A	1000 A	200 A	1000 A	100 A	1000 A	40 A	1000 A
Ø 41 / 50 x 12	LCTB 74/50(45)	22	250 A	1000 A	250 A	1000 A	250 A	1000 A	200 A	1000 A	100 A	1000 A
Ø 36 / 40 x 10	LCTB 86/40(45)	24	100 A	1000 A	100 A	1000 A	100 A	1000 A	100 A	1000 A	50 A	1000 A
Ø 46 / 50 x 12	LCTB 86/50(45)	24	300 A	1250 A	300 A	1250 A	300 A	1250 A	120 A	1250 A	100 A	1250 A
Ø 51 / 60 x 12	LCTB 86/60(45)	24	300 A	1600 A	300 A	1600 A	300 A	1600 A	200 A	1600 A	100 A	1600 A
Ø 54 / 60 x 12	LCTB 104/60(45)	26	300 A	1600 A	250 A	1600 A	300 A	1600 A	150 A	1600 A	100 A	1600 A
Ø 65 / 80 x 12	LCTB 104/80(45)	26	750 A	2000 A	400 A	2000 A	750 A	2000 A	250 A	2000A	200 A	2000 A
Ø 72 / 80 x30	LCTB 140/80(45)	27	500 A	2000 A	300 A	2000 A	500 A	2000 A	200 A	2000 A	200 A	2000 A
Ø 86/ 100 x 30	LCTB 140/100H(45)	27	600 A	4000 A	400 A	4000 A	600 A	4000 A	200 A	4000 A	200 A	4000 A
124 x 93	LCTB 225/125(50)	29	1000 A	6000 A	600 A	6000 A	1000 A	6000 A	600 A	6000 A	600 A	6000 A
166 x 65	LCTB 225/167(50)	29	1500 A	7500 A	1000 A	7500 A	1500 A	7500 A	1000 A	7500 A	1000 A	7500 A
Current transformers with vertical window for busbar or round conductor												
41 x 103	LCTB 100/100V(45)	25	1200 A	2500 A	1000 A	2500 A	1200 A	2500 A	400 A	2500 A	400 A	2500 A
38 x 128	LCTB 100/130V(45)	25	NA	NA	1500 A	3000 A	NA	NA	400 A	3000 A	400 A	3000 A
Ø 86 / 100 x 30	LCTB 140/100V(45)	27	600 A	3000 A	400 A	3000 A	600 A	3000 A	200 A	3000 A	200 A	3000 A
70 x 130	LCTB 140/130V(45)	27	NA	NA	1000 A	5000 A	NA	NA	400 A	5000 A	400 A	5000 A
Split core series												
23 x 33	LCTS 93/30SC(40)	30	NA	NA	NA	NA	NA	NA	300 A	400 A	100 A	400 A
85 x 54	LCTS 125/50SC(40)	30	NA	NA	NA	NA	NA	NA	250 A	1000 A	250 A	1000 A
85 x 125	LCTS 155/80SC(40)	30	NA	NA	NA	NA	NA	NA	250 A	3000 A	250 A	3000 A
82 x 162	LCTS 195/80SC(64)	30	NA	NA	NA	NA	NA	NA	500 A	5000 A	500 A	5000 A
Ø 18,5	LCTS 50/18SC	32	-	-	-	-	-	-	-	-	150 A	250 A
Ø 32,5	LCTS 50/32SC	32	-	-	-	-	-	-	-	-	250 A	500 A
3-phase current transformers												
20 x 10	LCTP 75/ 15 (60)	31	NA	NA	NA	NA	NA	NA	150 A	160 A	100 A	160 A
20 x 10	LCTP 105/ 21 (40)	31	NA	NA	NA	NA	NA	NA	160 A	250 A	100 A	250 A
30 x 15	LCTP 140/ 31 (40)	31	NA	NA	NA	NA	NA	NA	250 A	630 A	250 A	630 A
N/A	LCTP 185/ 27 (45)	32	NA	NA	NA	NA	NA	NA	NA	NA	100 A	500 A
N/A	LCTP 185/ 37 (45)	32	NA	NA	NA	NA	NA	NA	NA	NA	300 A	800 A

3 YEAR WARRANTY

shoplumel.com.pl

ePLAN

CURRENT TRANSFORMERS SUMMARY

			Range of primary currents											
Hole diameter/ Busbar dimensions	Transformer type	Page no.	Class 0.2S		Class 0.2		Class 0.5S		Class 0.5		Class 1		Class 5	
			min	max	min	max	min	max	min	max	min	max	min	max
Resin cast current transformers														
Ø 30	LRC1 80/30 (50)	33	-	-	-	-	-	-	NA	NA	60 A	160 A	-	-
Ø 50	LRC2 90/50 (40)	33	-	-	-	-	-	-	NA	NA	200 A	320 A	-	-
Ø 72	LRC3 110/72 (40)	34	-	-	-	-	-	-	NA	NA	400 A	630 A	-	-
Ø 85	LRC4 135/85 (40)	34	-	-	-	-	-	-	NA	NA	800 A	1250 A	-	-
Ø 115	LRC5 165/115 (40)	35	-	-	-	-	-	-	NA	NA	1500 A	2000 A	-	-
Ø 130	LRC6 195/130 (40)	35	-	-	-	-	-	-	NA	NA	2500 A	3200 A	-	-
Ø 165	LRC7 230/165 (40)	36	-	-	-	-	-	-	NA	NA	3000 A	3200 A	-	-
Ø 200	LRC8 295/200 (40)	36	-	-	-	-	-	-	NA	NA	4000 A	5000 A	-	-
Round current transformers														
Ø 30	LW01	41	-	-	-	-	-	-	100 A	200 A	50 A	200 A	-	-
Ø 30	LW02	41	-	-	200 A	200 A	150 A	200 A	75 A	200 A	50 A	200 A	-	-
Ø 43	LW03	42	-	-	200 A	300 A	200 A	300 A	100 A	300 A	75 A	300 A	-	-
Ø 58	LW04	42	-	-	400 A	600 A	200 A	600 A	150 A	600 A	120 A	600 A	-	-
Ø 72	LW05	43	-	-	400 A	1000 A	400 A	1000 A	250 A	1000 A	200 A	1000 A	-	-
Ø 113	LW06	43	-	-	600 A	3200 A	600 A	3200 A	600 A	3200 A	600 A	3200 A	-	-
Ø 30	LE 73/30 (50)	44	-	-	-	-	-	-	-	-	100 A	200 A	50 A	75 A
Ø 43	LE 92/43 (41)	44	-	-	-	-	-	-	-	-	200 A	400 A	-	-
Ø 50	LE 95/50 (40)	44	-	-	-	-	-	-	-	-	200 A	300 A	-	-
Ø 58	LE 100/58 (41)	44	-	-	-	-	-	-	-	-	400 A	600 A	-	-
Ø 72	LE 110/72 (41)	45	-	-	-	-	-	-	-	-	800 A	1000 A	-	-
Ø 85	LE 135/85 (30)	45	-	-	-	-	-	-	-	-	800 A	1200 A	-	-
Ø 113	LE 159/113 (40)	45	-	-	-	-	-	-	-	-	1200 A	2000 A	-	-
Ø 130	LE 165/130 (30)	45	-	-	-	-	-	-	-	-	2400 A	3000 A	-	-

3 YEAR WARRANTY

shop.lumel.com.pl



ePLAN

GENERAL OVERVIEW OF CURRENT TRANSFORMERS

CURRENT TRANSFORMER is used for measurement of electric alternating currents. When current in a circuit (primary current) is too high to directly apply to measuring instruments, a current transformer produces a reduced current (secondary current) accurately proportional to the current in the circuit, which can be conveniently connected to measuring and recording instruments. A current transformer also isolates the measuring instruments from what may be very high voltage in the monitored circuit. Relationship between primary and secondary currents is called **rated transformation ratio**.

$$I_1 = I_2 \cdot \frac{N_2}{N_1}$$

where: I_1 - primary current, I_2 - secondary current, N_1 - number of turns of primary winding, N_2 - number of turns of secondary winding, N_2/N_1 - rated transformation ratio
Current transformers are used mainly in such a way that the cable from the measured shock or bus current passes through the main hole transformer, which is equivalent to one coil primary winding. In this case, the above equation simplifies to:

$$I_1 = I_2 \cdot N_2$$

The task is to reduce the transformer output current for currents of over 120% of measurement range, to protect against destruction of measuring devices connected to the transformer in case of surges or failures in the primary circuit.



FEATURES:

- Wide range of accuracy classes: 0.2S, 0.2, 0.5S, 0.5, 1; 3
- Wide range of supported primary currents, the dimensions of rails, the length of casing and hole diameters.
- Multiple mounting methods, including wall mounting, DIN rail 35mm, the conductor, a current bar.
- Shields designed to seal connections.

GENERAL SPECIFICATION

Applicable standard:	IEC 61869-1/2
Case:	10% glass filled polycarbonate, flame retardant grades classified UL 94V-0 or housing made of epoxy resin (LRC series only)
Connection:	Two connection on each side. M4 screws with self lifting clamp strap.
Insulation class	E (120°C max)
Maximum system voltage:	0.72 kV
Test voltage:	4kV, 1 min, 50Hz 3kV, 1 min, 50Hz (for LCTB 50/xx(30), LCTB 50xx(50))
Operating frequency:	50/60 Hz
Rated primary rating:	1 A...7500 A
Rated secondary output:	5 A or 1 A
Rated burden:	1, 1.25, 1.5, 2.5, 3.75, 5, 7.5, 10, 12.5, 15, 20, 30, 45, 60, 100 VA
Accuracy class:	0.2, 0.2S, 0.5S – for laboratory and power measurement 0.5 – for accurate measuring 1; 3 – for general measurement, for analog meters
Ambient temperature:	-25°C...+40°C
Operating temperature:	-10°C...+55°C
Storage temperature:	-50°C...+80°C
Rated continuous thermal current (I_{cth}):	1,2 x I_n
Thermal short circuit current (I_{th}):	40 x I_n for wound type 60 x I_n for bus bar type
Dynamic short circuit current (I_{dyn}):	2.5 x I_{th}
Instrument security factor (FS):	2.5, 5, 10

FEATURES:

720 V	Class 0.2S 0.2 0.5S 0.5 1 3
-------	--------------------------------------

OUTPUTS:

5 A	1 A
-----	-----

DEMAND FOR POWER MEASURING DEVICES:

CT users expect these devices fulfill two basic conditions:

- a high degree of accuracy in the nominal current,
- security functions with overloads.

In order to fulfill these stipulations it is necessary for the power of a current transformer offered to fully achieve the actual power requirements of the measurement setup. In ascertaining the actual power requirements, consideration is to be made not only of the loss of power of the appliances to be connected up, but also the losses incurred by the instrument leads.

GENERAL OVERVIEW OF CURRENT TRANSFORMERS

Power requirements for measuring apparatur and relays:

- Analog moving-iron meters 0.7 – 1.5 VA
- Rectifier current meters 0.001 – 0.250 VA
- Multi-range current meters 0.005 – 5.000 VA
- Current recorders 0.300-9.000 VA
- Bimetallic ammeters 2.5 – 3.0 VA
- Power meter 0.2 – 5.0 VA
- Power factor meter 2.0 – 6.0 VA
- Meters 0.4 – 1.0 VA
- Relays 0.2 – 6.0 VA
- Power transducers 0.5 VA
- Energy meters 2.5 VA

Internal losses of copper wiring:

$$P = \frac{I^2 \times 2 L}{q_{CU} \times 56} \text{ [VA]}$$

Where:

I – Secondary nominal current,
L – Distance in [m],
q_{CU} – wire cross-section in [mm²].

CONNECTION DIAGRAMM OF CURRENT TRANSFORMERS

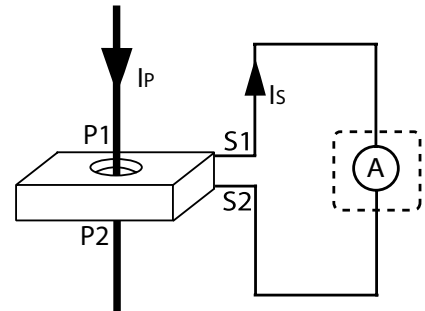


Table for values appertaining to 5 A




q _{cu}	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
2.5 mm²	0.36	0.71	1.07	1.43	1.78	2.14	2.50	2.86	3.21	3.57
4.0 mm²	0.22	0.45	0.67	0.89	1.12	1.34	1.56	1.79	2.01	2.24
6.0 mm²	0.15	0.30	0.45	0.60	0.74	0.89	1.04	1.19	1.34	1.49
10.0 mm²	0.09	0.18	0.27	0.36	0.44	0.54	0.63	0.71	0.80	0.89

Table for values appertaining to 1 A

q _{cu}	10 m	20 m	30 m	40 m	50 m	60 m	70 m	80 m	90 m	100 m
1.0 mm²	0.36	0.71	1.07	1.43	1.78	2.14	2.50	2.86	3.21	3.57
2.5 mm²	0.14	0.29	0.43	0.57	0.72	0.86	1.00	1.14	1.29	1.43
4.0 mm²	0.09	0.18	0.27	0.36	0.45	0.54	0.63	0.71	0.80	0.89
6.0 mm²	0.06	0.12	0.18	0.24	0.30	0.36	0.42	0.48	0.54	0.60
10.0 mm²	0.04	0.07	0.11	0.14	0.18	0.21	0.25	0.29	0.32	0.36

Reducing the transformer ratio.

An example of measuring currents smaller than the rated current of the transformer.

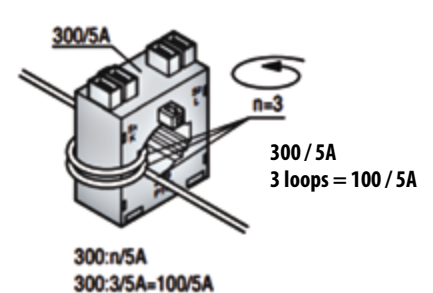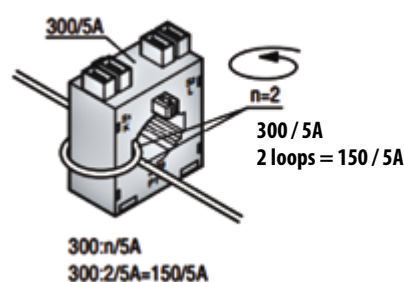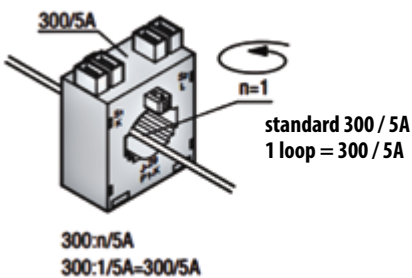

3 YEAR WARRANTY

shop.lumel.com.pl



ePLAN

INSTRUMENT SECURITY FACTOR



3 YEAR WARRANTY

Transformer type	LCTM – wound primary series						LCTR – round conductor series						LCTB – busbar series																									
	LCTM 62/W (40)		LCTM 74W (45)		LCTR 45/14 (40)		LCTR 50/14 (30)		LCTR 50/14 (50)		LCTR 62/R (40)		LCTB 45/21 (40)		LCTB 50/21 (30)		LCTB 50/30 (30)		LCTB 50/21 (50)		LCTB 50/30 (50)		LCTB 62/20 (40)			LCTB 62/30 (40)			LCTB 62/40 (40)			LCTB 62/30 (50)						
Class	0.2	0.5	1	0.2	0.5	1	0.5	1	0.5	1	0.2	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.25	0.2	0.5	1	0.25	0.2	0.5	1	0.25	0.2	0.5	1	0.25	0.5	1	3	
Range [A]	Instrument security factor (FS)																																					
1	15	10	5	15	10	5																																
2,5	15	10	5	15	10	5																																
5	15	10	5	15	10	5																																
7,5	15	10	5	15	10	5																																
10	15	10	5	15	10	5																																
15	15	10	5	15	10	5																																
20	15	10	5	15	10	5																																
25	15	10	5	15	10	5																																
30	15	10	5	15	10	5	5				5																											
40				15	10	5	5	5		5	5				5																						10	10
50				15	10	5	5	5	5	5	5				5	5									5												5	5
60				15	10	5	5	5	5	5	5	5			5	5	5								5	5											5	5
75							5	5	5	5	5	5			5	5	5	5							5	5											5	5
80							5	5	5	5	5	5			5	5	5	5	5						5	5											5	5
100							5	5	5	5	5	10			5	5	5	5	5	5	5	5	5			5	5	15	5	5	5	5	5	5	5	5	5	
120							5	5	5	5	5	10			5	5	5	5	5	5	5	5				5	5	15	5	5	5	5	5	5	5	5	5	
125							5	5	5	5	5	10			5	5	5	5	5	5	5	5				5	5	15	5	5	5	5	5	5	5	5	5	
150							5	5	5	5	5	10	5		5	5	5	5	5	5	5	5				5	5	10	5	5	5	5	5	5	5	5	5	
200							5	5	5	5	5	5	5		5	5	5	5	5	5	5	5				5	5	10	5	5	5	5	5	5	5	5	5	
250							5	5	5	5	5	5	5		5	5	5	5	5	5	5	5				5	5	10	5	5	5	5	5	5	5	5	5	
300							5	5	5	5	5	5	5		5	5	5	5	5	5	5	5				5	5	10	5	5	5	5	5	5	5	5	5	
400															5	5	5	5	5	5	5	5				5	5	10	5	5	5	5	5	5	5	5	5	
500															5	5	5	5	5	5	5	5				5	5	10	5	5	5	5	5	5	5	5	5	
600															5	5	5	5	5	5	5	5				5	5	10	5	5	5	5	5	5	5	5	5	
750																											5	5	10	5	5	5	5	5	5	5	5	5
800																											5	5	10	5	5	5	5	5	5	5	5	5

Transformer type	LCTB – busbar series																																									
	LCTB 74/20 (45)						LCTB 74/30 (45)						LCTB 74/40 (45)						LCTB 74/50 (45)						LCTB 86/40 (45)						LCTB 86/50 (45)						LCTB 86/60 (45)					
	0.25	0.2	0.55	0.5	1	3	0.25	0.2	0.55	0.5	1	3	0.25	0.2	0.55	0.5	1	0.25	0.2	0.55	0.5	1	0.25	0.2	0.55	0.5	1	0.25	0.2	0.55	0.5	1										
Class	Range [A]	Instrument security factor (FS)																																								
30						10						10																														
40					10							10					5																									
50					10							10					5																									
60					5							5					5																									
75					15	5						10	5				5																									
80					15	5						10	5				5																									
100		5	15	5	10	5	5	15	5	10	5	10	5	5			10	5	5	10	5	10	5	5							5		5									
120		5	15	5	10	5	5	15	5	10	5	10	5	5			10	5	5	10	5	10	5	5							10	5	5									
125		5	15	5	10	5	5	15	5	10	5	10	5	5			10	5	5	10	5	10	5	5							10	5	5									
150		5	15	5	10	5	5	15	5	10	5	10	5	5			5	5	5	10	5	10	5	5							5	5	5									
200		5	10	5	5	5	5	15	5	10	5	10	5	5	5		5	5	5	10	5	10	5	5							5	5	5									
250		5	10	5	5	5	5	10	5	10	5	10	5	5	5	5	10	5	5	10	5	10	5	5							5	5	5									
300		5	10	5	5	5	5	10	5	10	5	10	5	5	5	5	10	5	5	10	5	10	5	5	5	10	5	5	5	10	5	5	5									
400		5	10	5	5	5	10	10	10	10	5	10	10	10	5	5	5	5	5	15	10	15	5	5	5	5	5	5	5	10	5	5	5									
500							10	10	10	10	5	5	5	5	5	5	5	5	5	15	5	15	5	5	5	5	5	5	5	10	5	5	5									
600							10	10	10	10	5	5	10	5	10	5	5	5	5	10	5	10	5	5	5	5	5	5	5	10	10	5	5									
750							10	10	10	10	5	5	10	5	10	5	5	5	5	10	5	10	5	5	5	10	10	5	5	10	5	5	5									
800							10	10	10	10	5	5	5	5	5	5	5	5	5	10	5	10	5	5	5	10	5	5	5	10	5	5	5									
1000												5	5	5	5	5	5	5	5	10	5	10	5	5	5	5	5	5	10	5	5	5	5									
1200																								5	5	5	5	5	10	5	5	5	5									
1250																							5	5	5	5	5	10	5	5	5	5	5									
1500																															5	5	5	5								
1600																															5	5	5	5								

INSTRUMENT SECURITY FACTOR



3 YEAR WARRANTY

Transformer type	LCTB – busbar series																																	
	LCTB 100/100V (45)				LCTB 100/130V (45)				LCTB104/60 (45)				LCTB 104/80 (45)				LCTB 140/80 (45)				LCTB 140/100H (45)				LCTB 140/100V (45)				LCTB 140/130V (45)					
Class	0.25	0.2	0.55	0.5	1	0.2	0.5	1	0.25	0.2	0.55	0.5	1	0.25	0.2	0.55	0.5	1	0.25	0.2	0.55	0.5	1	0.25	0.2	0.55	0.5	1	0.25	0.2	0.55	0.5	1	
Range [A]	Instrument security factor (FS)																																	
100																																		
120																																		
125																																		
150																																		
200																																		
250																																		
300																																		
400																																		
500																																		
600																																		
750																																		
800																																		
1000																																		
1200	10	10	10	5	5																													
1250	10	10	10	5	5																													
1500	10	10	10	5	5																													
1600	10	10	10	5	5																													
2000	10	10	10	5	5																													
2500	10	10	10	5	5																													
3000																																		
4000																																		
5000																																		

INSTRUMENT SECURITY FACTOR

Transformer type	LCTB - busbar series				LCTS - split core series								LCTP - busbar series				LCTP - round conductor series							
					LCTB 225/125 (50)		LCTB 225/167 (50)		LCTS 93/30SC (40)		LCTS 125/50SC (40)		LCTS 155/80SC (40)		LCTS 195/80SC (64)		LCTS 50/18SC	LCTS 50/32SC	LCTP 105/21 (40)		LCTP 140/31 (40)	LCTP 185/27 (45)	LCTP 185/37 (45)	
Class	0.25	0.2	0.55	1	0.25	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	1	0.5	0.5	1	1	1	
Range [A]	Instrument security factor (FS)																							
60																								
100																								5
125																								
150																								10
160																								
200																								10
250																								5
300																								5
400																								5
500																								5
600																								5
630																								5
750																								5
800																								5
1000																								5
1200																								5
1250																								5
1500																								5
1600																								5
2000																								5
2500																								5
3000																								5
3200																								5
4000																								5
5000																								5
6000																								5
7500																								5

3 YEAR WARRANTY

shop.lumel.com.pl

ePLAN

INSTRUMENT SECURITY FACTOR

Transformer type	LRC - resin cast current transformers															
	LRC1 80/30 (50)		LRC2 90/50 (40)		LRC3 110/72 (40)		LRC4 135/85 (40)		LRC5 165/115 (40)		LRC6 195/130 (40)		LRC7 230/165 (40)		LRC8 295/200 (40)	
Class	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1
Range [A]																
60		10														
75		10														
100	10	5														
125	10	5														
150	10	5														
160	10	5														
200			5	5												
250			5	5												
300			5	5												
320			5	5												
400					5	5										
500					5	5										
600					5	5										
630					5	5										
750																
800							5	5								
1000							5	5								
1200							5	5								
1250							5	5								
1500									5	5						
1600									5	5						
2000									5	5						
2500											10	10				
3000											10	10	10	10		
3200											10	10	10	10		
4000															15	15
5000															15	15

Transformer type		LU01 - summation current transformer			
		LU01 (75)		LU01 (150)	
Class		0.5	1	0.5	1
Inputs	Power	Instrument security factor (FS)			
2 x 5A	5 VA	5	5		
	10 VA	5	5		
	15 VA	5	5		
	20 VA		5		
	25 VA		5		
2 x 1A	5 VA	5	5		
	10 VA	5	5		
	15 VA	5	5		
	25 VA		5		
3 x 5A	5 VA	5	5		
	10 VA	5	5		
	15 VA	5	5		
	20 VA		5		
3 x 1A	5 VA		5		
	10 VA	5			
	15 VA	5			
	25 VA		5		
4 x 5A	5 VA	5	5		
	10 VA	5	5		
	15 VA	5	5		
	20 VA		5		
4 x 1A	5 VA		5		
	10 VA	5			
	15 VA	5			
	25 VA		5		
5 x 5A	5 VA			10	10
	10 VA			5	5
	15 VA			5	5
	20 VA				5
	25 VA				5
5 x 1A	10 VA			5	5
	15 VA			5	5
6 x 5A	5 VA			10	10
	10 VA			5	5
	15 VA			5	5
	20 VA				5
	25 VA				5
6 x 1A	5 VA			10	10
	10 VA			5	5
	15 VA			5	5
7 x 5A	5 VA			10	10
	10 VA			10	10
	15 VA			5	5
	20 VA				5
7 x 1A	5 VA				5
	10 VA				5
	15 VA				5
	25 VA				5
8 x 5A	5 VA			10	10
	10 VA			10	10
	15 VA			5	5
	20 VA				5
8 x 1A	5 VA				5
	10 VA				5
	15 VA				5
	25 VA				5

Transformer type		LE - round current transformer							
		LE 165/130 (30) LE 159/113 (40) LE 135/85 (30) LE 110/72 (41) LE 100/58 (41) LE 95/50 (40) LE 92/43 (41) LE 73/30 (50)							
		1	5	1	1	1	1	1	1
Class		Instrument security factor (FS)							
Range [A]									
50			5						
60			5						
75			5						
100		5							
120		5							
125		5							
150		5							
200		5		5	5				
250				5	5				
300				5	5				
400				5		5			
500						5			
600						5			
800							5	5	
1000							5	5	
1200								5	5
1250									5
1500									5
1600									5
2000									5
2500									5
3000									5
3200									
4000									
5000									

Transformer type		LW - round current transformer															
		LW01				LW02				LW03				LW04			
		0.5	1	0.2	0.5S	0.5	1	0.2	0.5S	0.5	1	0.2	0.5S	0.5	1	0.2	0.5S
Class		Instrument security factor (FS)															
Range [A]																	
50			10				10										
60			10				10										
75			10			10	5			10							
100		10	5			10	5			10	10						
120		10	5			10	5			10	10			10			
125		5	5			10	5			10	10			10			
150		5	5			10	5			10	5			10	10		
200		5	5	10	10	5	5			10	5			10	10	10	
250								10	5	5	5			10	5		
300								10	5	5	5			10	5	5	
400												10	5	5	5	5	
500												10	5	5	5	5	
600												5	5	5	5	5	
800																10	10
1000																10	5
1200																10	5
1250																10	5
1500																10	5
1600																10	5
2000																10	5
2500																10	5
3000																10	5
3200																10	5
4000																10	5
5000																	

LCTM - WOUND PRIMARY SERIES



INPUT:

1 A
...
60 A


OUTPUTS:

5 A 1 A


	LCTM 62/W (40)	LCTM 74/W (45)
Depth	40 mm	45 mm
Width	62 mm	74 mm
Primary current	1 A...30 A	1 A...60 A
Secondary current	1 A, 5 A	
Accuracy class	0.2; 0.5; 1	

DIMENSIONS

LCTM 62/W (40)

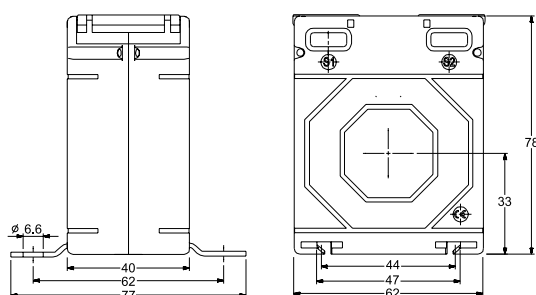

LCTM 74/W (45)

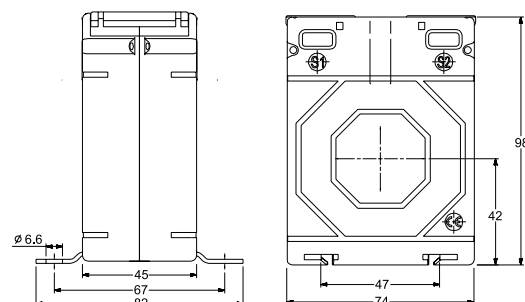

ORDERING CODES

LCTM 62W040

LCTM 74W045

Secondary current	Code
x/5A	5
x/1A	1

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTM 62/W (40)		
Accuracy class	0,2	0,5	1
Code	2	5	1

Transformer type	LCTM 74/W (45)		
Accuracy class	0.2	0.5	1
Code	2	5	1

Code	Rated primary current	Transformer burden		
0001A	1A	1 VA	2.5 VA	5 VA
02.5A	2.5 A	1 VA	2.5 VA	5 VA
0005A	5 A	1 VA	2.5 VA	5 VA
07.5A	7.5 A	1 VA	2.5 VA	5 VA
0010A	10 A	1 VA	2.5 VA	5 VA
0015A	15 A	1 VA	2.5 VA	5 VA
0020A	20 A	1 VA	2.5 VA	5 VA
0025A	25 A	1 VA	2.5 VA	5 VA
0030A	30 A	1 VA	2.5 VA	5 VA

Code	Rated primary current	Transformer burden		
0001A	1A	1.5 VA	5 VA	10 VA
02.5A	2.5 A	1.5 VA	5 VA	10 VA
0005A	5 A	1.5 VA	5 VA	10 VA
07.5A	7.5 A	1.5 VA	5 VA	10 VA
0010A	10 A	1.5 VA	5 VA	10 VA
0015A	15 A	1.5 VA	5 VA	10 VA
0020A	20 A	1.5 VA	5 VA	10 VA
0025A	25 A	1.5 VA	5 VA	10 VA
0030A	30 A	1.5 VA	5 VA	10 VA
0040A	40 A	1.5 VA	5 VA	10 VA
0050A	50 A	1.5 VA	5 VA	10 VA
0060A	60 A	1.5 VA	5 VA	10 VA

Ordering example: Order code LCTM 62W0400030A55 means the transformer LCTM 62/W(40) 30/5A; Class 0.5; power 2.5VA

ACCESSORIES:

DIN rail mounting base

Order code: LH000-0904-130-124

LCTR - ROUND CONDUCTOR SERIES

	LCTR 45/14 (40)	LCTR 50/14 (30)	LCTR 50/14 (50)	LCTR 62/R (40)
Hole diameter	Ø 14 mm	Ø 14 mm	Ø 14 mm	Ø 22 mm
Depth	40 mm	31 mm	51 mm	40 mm
Width	45 mm	50 mm	50 mm	62 mm
Primary current	30 A...300 A	40 A...300 A	30 A...300 A	50 A...600 A
Secondary current	1 A, 5 A			
Accuracy class	0.5; 1; 3			0.2; 0.5S; 0.5; 1; 3

INPUT:

30 A
...
600 A

OUTPUTS:

5 A 1 A



3 YEAR WARRANTY


shop.lumel.com.pl




ePLAN

DIMENSIONS

LCTR 45/14 (40)

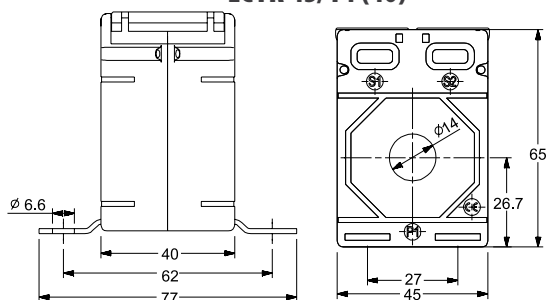

LCTR 50/14 (30)

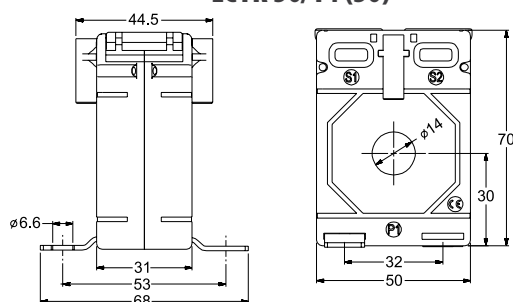

ORDERING CODES

LCTR 451440



Secondary current

Code

x/5A

5

x/1A

1

Transformer type

LCTR 45/14 (40)

Accuracy class

0.5

1

3

Code

Rated primary current

Transformer burden

Code

0030A

30 A

-

1 VA

1.5 VA

0040A

40 A

-

1 VA

1.5 VA

0050A

50 A

-

1.5 VA

2.5 VA

0060A

60 A

-

1.5 VA

2.5 VA

0075A

75 A

-

2.5 VA

3.75 VA

0080A

80 A

1 VA

2.5 VA

3.75 VA

0100A

100 A

1.5 VA

3.75 VA

3.75 VA

0120A

120 A

1.5 VA

3.75 VA

5 VA

0125A

125 A

2.5 VA

3.75 VA

5 VA

0150A

150 A

2.5 VA

5 VA

5 VA

0200A

200 A

3.75 VA

7.5 VA

7.5 VA

0250A

250 A

5 VA

7.5 VA

10 VA

0300A

300 A

5 VA

10 VA

12.5 VA

LCTR 501430



Secondary current

Code

x/5A

5

x/1A

1

Transformer type

LCTR 50/14 (30)

Accuracy class

0.5

1

3

Code

Rated primary current

Transformer burden

Code

0040A

40 A

-

1 VA

1.5 VA

0050A

50 A

-

1.5 VA

2 VA

0060A

60 A

-

1.5 VA

2 VA

0075A

75 A

-

1.5 VA

2.5 VA

0080A

80 A

-

1.5 VA

2.5 VA

0100A

100 A

2.5 VA

3.75 VA

5 VA

0120A

120 A

2.5 VA

3.75 VA

5 VA

0125A

125 A

2.5 VA

3.75 VA

5 VA

0150A

150 A

3.75 VA

5 VA

7.5 VA

0200A

200 A

3.75 VA

5 VA

7.5 VA

0250A

250 A

5 VA

7.5 VA

7.5 VA

0300A

300 A

7.5 VA

7.5 VA

7.5 VA


Ordering example: Order code LCTR 4514400100A55 means the transformer LCTR 45/14(40) 100/5A meeting the requirements of the class:

- kl. 0.5 1.5 VA
- kl. 1 3.75 VA
- kl. 3 3.75 VA


LCTR - ROUND CONDUCTOR SERIES

DIMENSIONS

LCTR 50/14 (50)

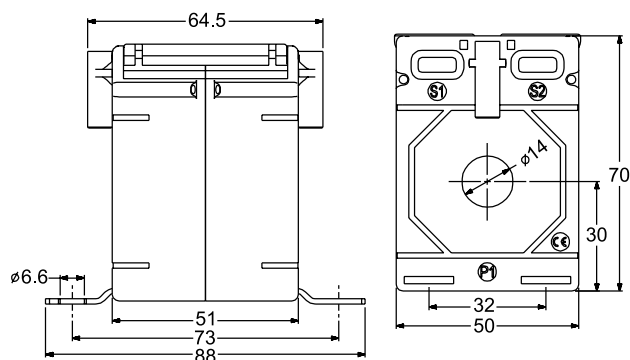

LCTR 62/R (40)

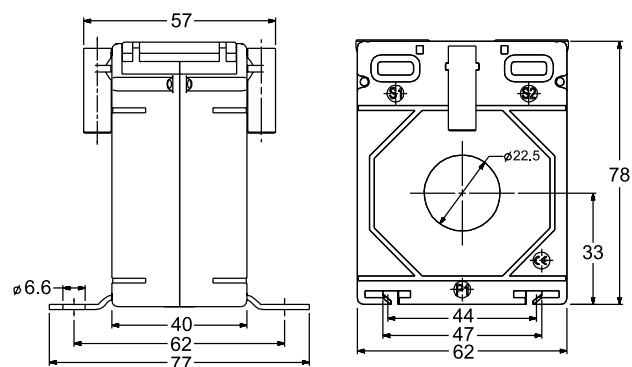

ORDERING CODES

LCTR 501450

LCTR 62R040

Secondary current	Code
x/5A	5
x/1A	1

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTR 50/14 (50)		
Accuracy class	0.5	1	3

Transformer type	LCTR 62/R (40)					
Accuracy class	0.25	0.2	0.55	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden			Code
0030A	30 A	-	1 VA	1 VA	1
0040A	40 A	-	1 VA	1 VA	
0050A	50 A	1.5 VA	1.5 VA	2 VA	
0060A	60 A	1.5 VA	1.5 VA	2.5 VA	
0075A	75 A	2.5 VA	5 VA	5 VA	
0080A	80 A	2.5 VA	5 VA	7.5 VA	5
0100A	100 A	3.75 VA	5 VA	7.5 VA	
0120A	120 A	3.75 VA	5 VA	7.5 VA	
0125A	125 A	3.75 VA	5 VA	7.5 VA	
0150A	150 A	5 VA	7.5 VA	10 VA	
0200A	200 A	7.5 VA	10 VA	12.5 VA	5
0250A	250 A	10 VA	12.5 VA	15 VA	
0300A	300 A	10 VA	12.5 VA	15 VA	

Code	Rated primary current	Transformer burden						Code
0050A	50 A	-	-	-	-	1.5 VA	2.5 VA	1
0060A	60 A	-	-	-	-	2.5 VA	3.75 VA	
0075A	75 A	-	-	-	1.5 VA	2.5 VA	3.75 VA	
0080A	80 A	-	-	-	2.5 VA	2.5 VA	3.75 VA	
0100A	100 A	-	1.5 VA	-	2.5 VA	5 VA	7.5 VA	
0120A	120 A	-	1.5 VA	-	3.75 VA	5 VA	7.5 VA	5
0125A	125 A	-	1.5 VA	-	3.75 VA	5 VA	7.5 VA	
0150A	150 A	2.5 VA	2.5 VA	2.5 VA	5 VA	5 VA*	7.5 VA	
0200A	200 A	5 VA	5 VA	5 VA	5 VA*	7.5 VA	10 VA	
0250A	250 A	5 VA	5 VA	5 VA	10 VA	15 VA	15 VA	
0300A	300 A	5 VA	5 VA	5 VA	10 VA	15 VA	15 VA	5
0400A	400 A	5 VA	7.5 VA	5 VA	15 VA	15 VA	20 VA	
0500A	500 A	10 VA	10 VA	10 VA	15 VA	15 VA	20 VA	
0600A	600 A	10 VA	10 VA	10 VA	15 VA	15 VA	20 VA	

Ordering example: Order code LCTR 5014500100A55 means the transformer LCTR 50/14(50) 100/5A meeting the requirements of the class:

- kl. 0.5 3.75 VA
- kl. 1 5 VA
- kl. 3 7.5 VA

* The custom value of the nominal power, which should be given when ordering the transformer.

ACCESSORIES:

DIN rail mounting base
- for details see page 46

LCTB 45 - BUSBAR SERIES

	LCTB 45/21 (40)
Hole diameter	Ø 20 mm
Busbar	20 x 10 mm
Depth	40 mm
Width	45 mm
Primary current	50 A...400 A
Secondary current	1 A, 5 A
Accuracy class	0.5; 1; 3

INPUT:

50 A
...
400 A

OUTPUTS:


5 A 1 A



3 YEAR WARRANTY

DIMENSIONS

LCTB 45/21 (40)

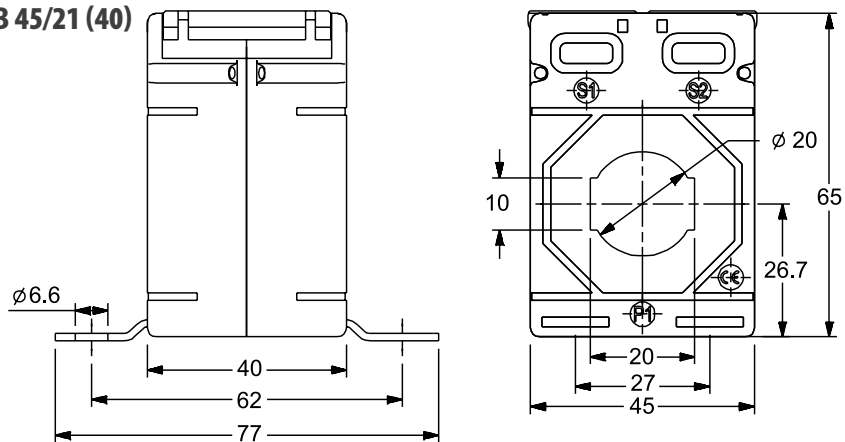

ORDERING CODES

LCTB 452140 [] [] [] [] [] [] []

Secondary current	Code
x/5A	5
x/1A	1

Code	Transformer type	LCTB 45/21(40)			Code
	Accuracy class	0.5	1	3	
	Primary current	Transformer burden			
0050A	50 A	-	1.5 VA	2 VA	1
0060A	60 A	-	1.5 VA	2 VA	
0075A	75 A	-	2.5 VA	3 VA	
0080A	80 A	1 VA	2.5 VA	3 VA	5
0100A	100 A	1.5 VA	3.75 VA	3.75 VA	
0120A	120 A	1.5 VA	3.75 VA	3.75 VA	
0125A	125 A	2.5 VA	3.75 VA	5 VA	
0150A	150 A	2.5 VA	5 VA	5 VA	
0200A	200 A	3.75 VA	5 VA	5 VA	
0250A	250 A	3.75 VA	5 VA	7.5 VA	
0300A	300 A	5 VA	5 VA	7.5 VA	
0400A	400 A	5 VA	5 VA	7.5 VA	

Ordering example: Order code LCTB 4521400100A55 means the transformer LCTB 45/21(40) 100/5A meeting the requirements of the class:

- kl. 0.5 1.5 VA
- kl. 1 3.75 VA
- kl. 3 3.75 VA

ACCESSORIES:

DIN rail mounting base

Order code: LH000-0904-130-002

shop.lumel.com.pl



ePLAN

LCTB 50 - BUSBAR SERIES



INPUT:

40 A
...
600 A

OUTPUTS:


5 A 1 A




	LCTB 50/21 (30)	LCTB 50/30 (30)	LCTB 50/21 (50)	LCTB 50/30 (50)
Hole diameter	Ø 21 mm	Ø 26 mm	Ø 21 mm	Ø 26 mm
Busbar	20 x 10 mm	30 x 10 mm	20 x 10 mm	30 x 10 mm
Depth	31 mm	31 mm	51 mm	51 mm
Width	50 mm	50 mm	50 mm	50 mm
Primary current	40 A...400 A	75 A...600 A	50 A...400 A	50 A... 600 A
Secondary current	1 A, 5 A			
Accuracy class	0.5; 1; 3			

DIMENSIONS

LCTB 50/21 (30)

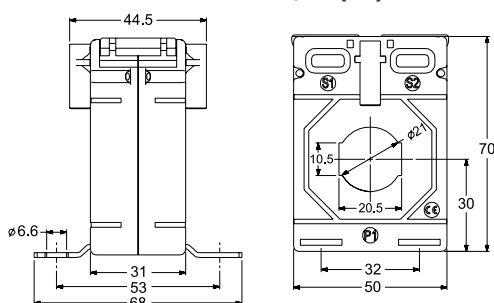

LCTB 50/30 (30)

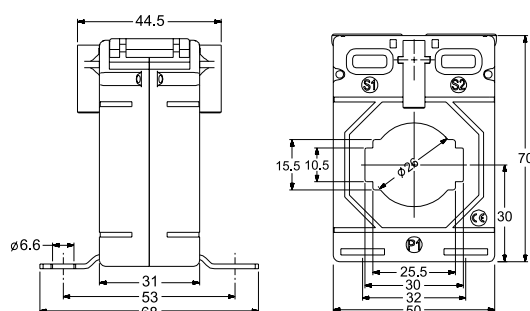

ORDERING CODES

LCTB 502130

LCTB 503030

Secondary current	Code
x/5A	5
x/1A	1

Secondary current	Code
x/5A	5
x/1A	1

Transformer type		LCTB 50/21 (30)			Code
Accuracy class		0.5	1	3	
Code	Rated primary current	Transformer burden			3 1 5
0040A	40 A	-	-	1 VA	
0050A	50 A	-	1 VA	2 VA	
0060A	60 A	-	1 VA	2 VA	
0075A	75 A	-	1.5 VA	2.5 VA	
0080A	80 A	1 VA	2.5 VA	3.75 VA	
0100A	100 A	1.5 VA	2.5 VA	3.75 VA	
0120A	120 A	2.5 VA	2.5 VA	3.75 VA	
0125A	125 A	2.5 VA	3.75 VA	5 VA	
0150A	150 A	2.5 VA	5 VA	5 VA	
0200A	200 A	3.75 VA	5 VA	5 VA	5
0250A	250 A	5 VA	5 VA	5 VA	
0300A	300 A	5 VA	7.5 VA	7.5 VA	
0400A	400 A	5 VA	7.5 VA	7.5 VA	

Transformer type		LCTB 50/30 (30)			Code
Accuracy class		0.5	1	3	
Code	Rated primary current	Transformer burden			1 5
0075A	75 A	-	1 VA	1.5 VA	
0080A	80 A	-	1.5 VA	2 VA	
0100A	100 A	1 VA	2.5 VA	2.5 VA	
0120A	120 A	1 VA	2.5 VA	3 VA	
0125A	125 A	1 VA	2.5 VA	3 VA	
0150A	150 A	2.5 VA	3.75 VA	3.75 VA	
0200A	200 A	2.5 VA	5 VA	5 VA	
0250A	250 A	5 VA	5 VA	6.25 VA	
0300A	300 A	5 VA	5 VA	6.25 VA	
0400A	400 A	5 VA	5 VA * 6.25 VA	6.25 VA	5
0500A	500 A	5 VA	6.25 VA	7.5 VA	
0600A	600 A	5 VA	7.5 VA	10 VA	


Ordering example: Order code LCTB 5021300100A55 means the transformer LCTB 50/21(30) 100/5A meeting the requirements of the class: kl. 0.5 1.5 VA; kl. 1 2.5 VA; kl. 3 3.75 VA

* The custom value of the nominal power, which should be given when ordering the transformer.


LCTB 50 - BUSBAR SERIES

DIMENSIONS

LCTB50/21 (50)

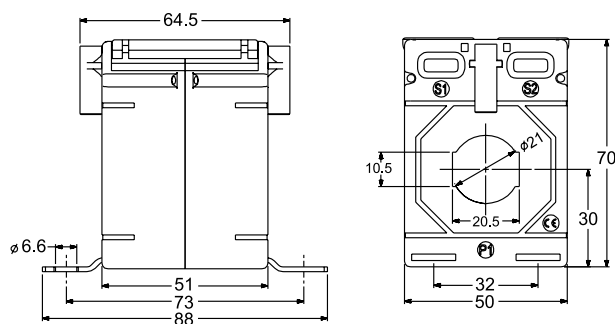

LCTB 50/30 (50)

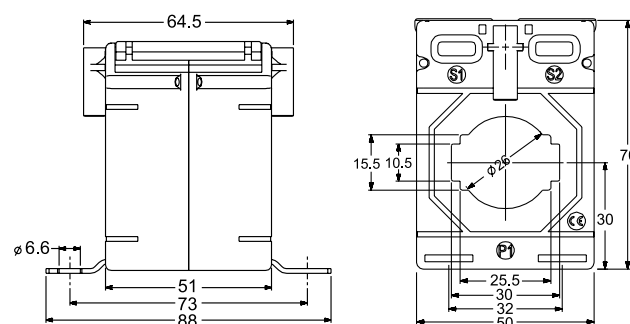

ORDERING CODES

LCTB 502150

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 50/21 (50)		
Accuracy class	0.5	1	3

Code	Rated primary current	Transformer burden			Code
0050A	50 A	1 VA	2.5 VA	3 VA	5
0060A	60 A	1 VA	2.5 VA	3.75 VA	
0075A	75 A	1.5 VA	2.5 VA	3.75 VA	
0080A	80 A	2.5 VA	5 VA	5 VA	
0100A	100 A	2.5 VA	5 VA	7.5 VA	
0120A	120 A	3.75 VA	5 VA	7.5 VA	
0125A	125 A	5 VA	5 VA	7.5 VA	
0150A	150 A	5 VA	10 VA	10 VA	
0200A	200 A	7.5 VA	10 VA	12.5 VA	
0250A	250 A	7.5 VA	10 VA	15 VA	
0300A	300 A	7.5 VA	12.5 VA	15 VA	5
0400A	400 A	10 VA	15 VA	15 VA	

LCTB 503050

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 50/30 (50)		
Accuracy class	0.5	1	3

Code	Rated primary current	Transformer burden			Code
0050A	50 A	-	1.5 VA	1.5 VA	1
0060A	60 A	-	1.5 VA	2 VA	
0075A	75 A	-	2.5 VA	2.5 VA	
0080A	80 A	-	2.5 VA	3.75 VA	
0100A	100 A	1 VA	3.75 VA	3.75 VA	5
0120A	120 A	2.5 VA	5 VA	5 VA	
0125A	125 A	2.5 VA	5 VA	5 VA	
0150A	150 A	5 VA	5 VA	7.5 VA	
0200A	200 A	5 VA	7.5 VA	10 VA	
0250A	250 A	5 VA	10 VA	10 VA	
0300A	300 A	5 VA	10 VA	10 VA	
0400A	400 A	10 VA	12.5 VA	12.5 VA	
0500A	500 A	10 VA	12.5 VA	15 VA	
0600A	600 A	10 VA	15 VA	15 VA	

Ordering example: Order code LCTB 5021500100A55 means the transformer LCTB 50/21(50) 100/5A meeting the requirements of the class:

- kl. 0.5 2.5 VA
- kl. 1 5 VA
- kl. 3 7.5 VA

ACCESSORIES:

DIN rail mounting base
- for details see page 46

3 YEAR WARRANTY

shop.lumel.com.pl



ePLAN

LCTB 62 - BUSBAR SERIES



INPUT:

40 A
...
800 A

OUTPUTS:

5 A


1 A




	LCTB 62/20 (40)	LCTB 62/30 (40)	LCTB 62/30 (50)	LCTB 62/40 (40)
Hole diameter	-	Ø 30 mm	Ø 28 mm	Ø 31 mm
Busbar	20x12 mm	30x10 mm, 2x25 x10 mm	30x10 mm	40x10 mm, 2 x 30 x 10 mm
Depth	40 mm	40 mm	50 mm	40 mm
Width	62 mm	62 mm	62 mm	62 mm
Primary current	50 A...400 A	50 A...800 A	40 A...800 A	100 A...800 A
Secondary current	1 A, 5 A			
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1; 3			

DIMENSIONS

LCTB 62/20 (40)

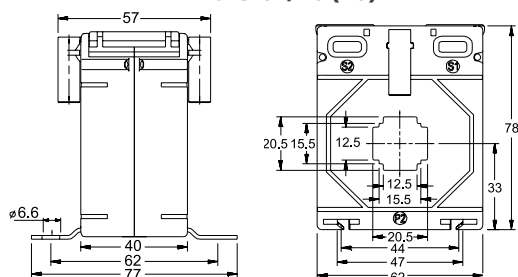

LCTB 62/30 (40)

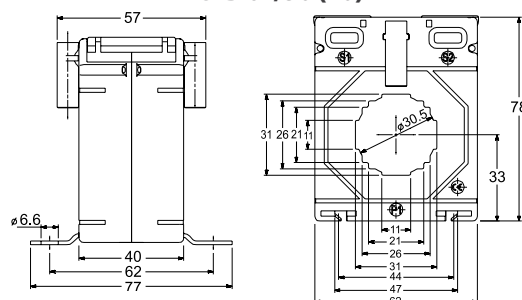

ORDERING CODES

LCTB 622040

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 62/20 (40)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R			

Code	Rated primary current	Transformer burden						Code
0050A	50 A	-	-	-	-	1.5 VA	2.5 VA	1
0060A	60 A	-	-	-	-	2.5 VA	3.75 VA	
0075A	75 A	-	-	-	1.5 VA	3.75 VA	3.75 VA	
0080A	80 A	-	-	-	2.5 VA	3.75 VA	3.75 VA	
0100A	100 A	1.5 VA	1.5 VA	1.5 VA	2.5 VA	5 VA	7.5 VA	5
0120A	120 A	1.5 VA	1.5 VA	1.5 VA	3.75 VA	5 VA	7.5 VA	
0125A	125 A	1.5 VA	1.5 VA	1.5 VA	3.75 VA	5 VA	7.5 VA	
0150A	150 A	2 VA	2.5 VA	2.0 VA	5 VA	7.5 VA	10 VA	
0200A	200 A	3.75 VA	5 VA	3.75 VA	7.5 VA	10 VA	12.5 VA	
0250A	250 A	3.75 VA	5 VA	3.75 VA	10 VA	15 VA	15 VA	
0300A	300 A	3.75 VA	5 VA	3.75 VA	10 VA	15 VA	15 VA	
0400A	400 A	5 VA	7.5 VA	5 VA	15 VA	15 VA	20 VA	
0500A	500 A	5 VA	10 VA	5 VA	15 VA	15 VA	20 VA	

LCTB 623040

Secondary current	Code
x/5A	5
x/1A	1


Transformer type	LCTB 62/30 (40)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R			

Code	Rated primary current	Transformer burden						Code
0050A	50 A	-	-	-	-	1.25 VA	2 VA	1
0060A	60 A	-	-	-	-	1.5 VA	2 VA	
0075A	75 A	-	-	-	-	1.5 VA	2 VA	
0080A	80 A	-	-	-	-	2 VA	2.5 VA	
0100A	100 A	1 VA	1 VA	1 VA	1.5 VA	2.5 VA	3.75 VA	5
0120A	120 A	1 VA	1 VA	1 VA	2.5 VA	3.75 VA	5 VA	
0125A	125 A	1 VA	1 VA	1 VA	2.5 VA	3.75 VA	5 VA	
0150A	150 A	2.5 VA	1.5 VA	2.5 VA	3.75 VA	5 VA	7.5 VA	
0200A	200 A	5 VA	2.5 VA	5 VA	5 VA	7.5 VA	10 VA	
0250A	250 A	5 VA	3.75 VA	5 VA	5 VA	10 VA	15 VA	
0300A	300 A	5 VA	3.75 VA	5 VA	10 VA	10 VA	15 VA	
0400A	400 A	5 VA	5 VA	5 VA	12.5 VA	12.5 VA	15 VA	
0500A	500 A	5 VA	7.5 VA	5 VA	12.5 VA	12.5 VA	15 VA	
0600A	600 A	7.5 VA	7.5 VA	7.5 VA	15 VA	15 VA	20 VA	
0750A	750 A	10 VA	10 VA	10 VA	15 VA	15 VA	20 VA	
0800A	800 A	10 VA	10 VA	10 VA	15 VA	15 VA	20 VA	


Ordering example: Order code LCTB 6220400100A55 means the transformer LCTB 62/20(40) 100/5A meeting the requirements of the class: kl. 0.5 - 2.5 VA; kl. 1 - 5 VA; kl. 3 - 7.5 VA

DIMENSIONS

LCTB 62/30 (50)

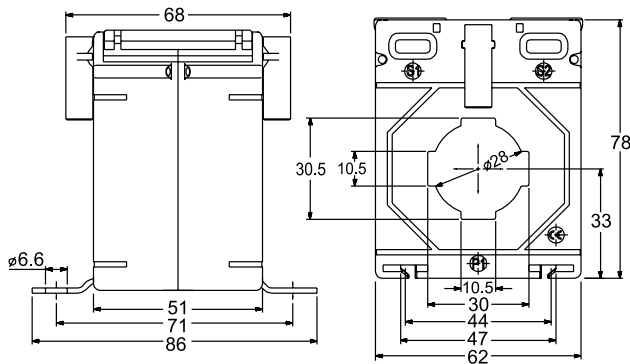

LCTB 62/40 (40)

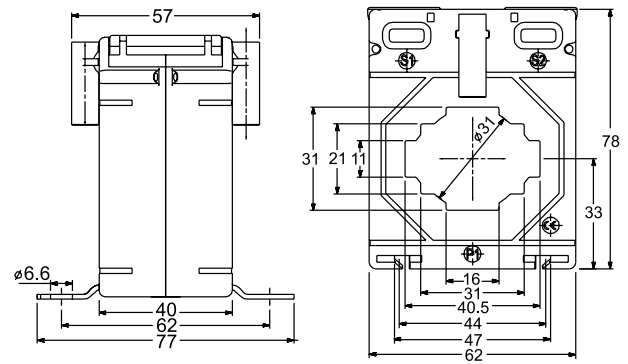

ORDERING CODES

LCTB 623050

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 62/30 (50)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R			

LCTB 624040

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 62/40 (40)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0040A	40 A	-	-	-	-	-	1 VA	3
0050A	50 A	-	-	-	-	1.5 VA	2.5 VA	1
0060A	60 A	-	-	-	-	2.5 VA	3.75 VA	
0075A	75 A	-	-	-	2.5 VA	2.5 VA	3.75 VA	
0080A	80 A	-	-	-	2.5 VA	3.75 VA	5 VA	
0100A	100 A	1.25 VA	1.25 VA	1.25 VA	2.5 VA	5 VA	7.5 VA	
0120A	120 A	1.25 VA	1.25 VA	1.25 VA	5 VA	5 VA	7.5 VA	
0125A	125 A	1.25 VA	1.25 VA	1.25 VA	5 VA	5 VA	7.5 VA	
0150A	150 A	2 VA	2 VA	2 VA	5 VA	7.5 VA	10 VA	
0200A	200 A	5 VA	3.75 VA	5 VA	10 VA	15 VA	15 VA	
0250A	250 A	5 VA	5 VA	5 VA	15 VA	15 VA	20 VA	
0300A	300 A	5 VA	5 VA	5 VA	15 VA	15 VA	20 VA	
0400A	400 A	10 VA	6.25 VA	10 VA	15 VA	30 VA	30 VA	
0500A	500 A	5 VA	7.5 VA	5 VA	15 VA	30 VA	30 VA	
0600A	600 A	6.25 VA	10 VA	6.25 VA	20 VA	30 VA	30 VA	
0750A	750 A	6.25 VA	10 VA	6.25 VA	20 VA	30 VA	30 VA	
0800A	800 A	6.25 VA	10 VA	6.25 VA	20 VA	30 VA	35 VA	

Code	Rated primary current	Transformer burden						Code
0100A	100 A	-	-	-	-	1 VA	1.5 VA	
0120A	120 A	-	-	-	-	1.5 VA	2.5 VA	
0125A	125 A	-	-	-	-	1.5 VA	2.5 VA	
0150A	150 A	-	-	-	-	2.5 VA	3 VA	
0200A	200 A	1 VA	1 VA	1 VA	1.5 VA	3.75 VA	3.75 VA	
0250A	250 A	1.5 VA	1.5 VA	1.5 VA	2.5 VA	5 VA	5 VA	
0300A	300 A	1.5 VA	1.5 VA	1.5 VA	5 VA	5 VA	5 VA	
0400A	400 A	2.5 VA	2.5 VA	2.5 VA	5 VA	5 VA	7.5 VA	
0500A	500 A	2.5 VA	5 VA	3.75 VA	5 VA	5 VA*	7.5 VA	5
0600A	600 A	2.5 VA	7.5 VA	2.5 VA	7.5 VA	10 VA	12.5 VA	
0750A	750 A	5 VA	10 VA	5 VA	10 VA	10 VA	12.5 VA	
0800A	800 A	5 VA	10 VA	5 VA	10 VA	10 VA	12.5 VA	

* The custom value of the nominal power, which should be given when ordering the transformer.

Ordering example: Order code LCTB 6230500100A55 means the transformer LCTB 62/30(50) 100/5A meeting the requirements of the class:

- kl. 0.5 2.5 VA
- kl. 1 5 VA
- kl. 3 7.5 VA

ACCESSORIES:

DIN rail mounting base
- for details see page 46

3 YEAR WARRANTY

shop.lumel.com.pl



ePLAN

LCTB 74 - BUSBAR SERIES



INPUT:

30 A
...
1000 A

OUTPUTS:

5 A


1 A




	LCTB 74/20 (45)	LCTB 74/30 (45)	LCTB 74/40 (45)	LCTB 74/50 (45)
Hole diameter	Ø 20 mm	Ø26 mm	Ø35 mm	Ø 41 mm
Busbar	20x10 mm	30x15 mm, 2x20x10 mm	40x12 mm, 2x30 x15 mm	50x12 mm, 2 x40x10 mm
Depth	45 mm	45 mm	45 mm	45 mm
Width	74 mm	74 mm	74 mm	74 mm
Primary current	30 A...400 A	30 A...800 A	40 A...1000 A	100 A...1000 A
Secondary current	1 A, 5 A			
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1; 3			

DIMENSIONS

LCTB 74/20 (45)

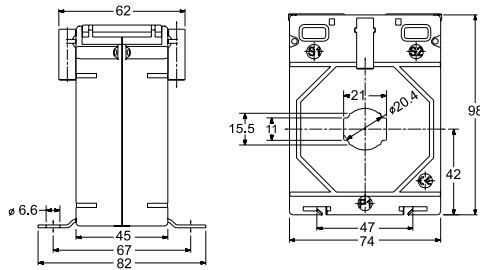

LCTB 74/30 (45)

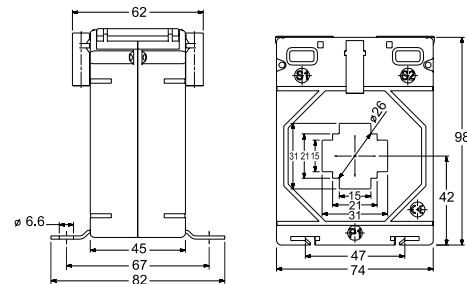

ORDERING CODES

LCTB 742045



Secondary current

Code

x/5A

5

x/1A

1

Transformer type	LCTB 74/20 (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

LCTB 743045



Secondary current

Code

x/5A

5

x/1A

1

Transformer type	LCTB 74/30 (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0030A	30 A	-	-	-	-	-	1.5 VA	3
0040A	40 A	-	-	-	-	1.5 VA	2 VA	1
0050A	50 A	-	-	-	-	2.5 VA	3.75 VA	5
0060A	60 A	-	-	-	-	3.75 VA	5 VA	
0075A	75 A	-	-	-	1.5 VA	5 VA	7.5 VA	
0080A	80 A	-	-	-	1.5 VA	5 VA	7.5 VA	
0100A	100 A	1.5 VA	1.5 VA	1.5 VA	5 VA	7.5 VA	10 VA	
0120A	120 A	1.5 VA	1.5 VA	1.5 VA	5 VA	10 VA	12.5 VA	5
0125A	125 A	1.5 VA	1.5 VA	1.5 VA	5 VA	10 VA	12.5 VA	
0150A	150 A	2.5 VA	2.5 VA	2.5 VA	7.5 VA	12.5 VA	15 VA	
0200A	200 A	5 VA	5 VA	5 VA	10 VA	15 VA	20 VA	
0250A	250 A	5 VA	5 VA	5 VA	10 VA	15 VA	20 VA	
0300A	300 A	5 VA	7.5 VA	5 VA	15 VA	15 VA	20 VA	5
0400A	400 A	5 VA	10 VA	5 VA	15 VA	20 VA	25 VA	


Code	Rated primary current	Transformer burden						Code
0030A	30 A	-	-	-	-	-	1 VA	3
0040A	40 A	-	-	-	-	1.5 VA	1.5 VA	1
0050A	50 A	-	-	-	-	1.5 VA	2.5 VA	
0060A	60 A	-	-	-	-	2.5 VA	3.75 VA	
0075A	75 A	-	-	-	1.5 VA	2.5 VA	3.75 VA	
0080A	80 A	-	-	-	1.5 VA	3.75 VA	5 VA	
0100A	100 A	1.5 VA	1.5 VA	1.5 VA	2.5 VA	5 VA	7.5 VA	5
0120A	120 A	1.5 VA	1.5 VA	1.5 VA	2.5 VA	5 VA	7.5 VA	
0125A	125 A	1.5 VA	1.5 VA	1.5 VA	2.5 VA	5 VA	7.5 VA	
0150A	150 A	1.5 VA	1.5 VA	1.5 VA	5 VA	7.5 VA	10 VA	
0200A	200 A	2.5 VA	2.5 VA	2.5 VA	10 VA	15 VA	15 VA	
0250A	250 A	2.5 VA	2.5 VA	2.5 VA	10 VA	15 VA	15 VA	5
0300A	300 A	2.5 VA	5 VA	2.5 VA	10 VA	15 VA	15 VA	
0400A	400 A	5 VA	7.5 VA	5 VA	15 VA	20 VA	25 VA	
0500A	500 A	5 VA	10 VA	5 VA	15 VA	20 VA	25 VA	
0600A	600 A	5 VA	15 VA	5 VA	15 VA	20 VA	25 VA	
0750A	750 A	7.5 VA	20 VA	7.5 VA	20 VA	30 VA	30 VA	5
0800A	800 A	10 VA	30 VA	10 VA	30 VA	30 VA	35 VA	

Ordering example: Order code LCTB 7420450100A55 means the transformer LCTB 74/20(45) 100/5A meeting the requirements of the class: kl. 0.5 - 5 VA; kl. 1 - 7.5 VA; kl. 3 - 10 VA


LCTB 74 - BUSBAR SERIES

DIMENSIONS

LCTB 74/40 (45)

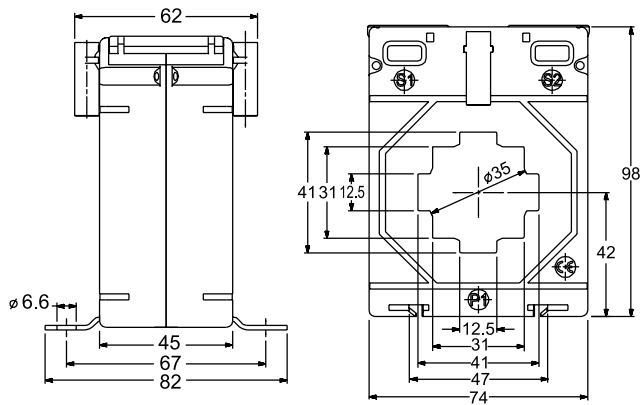

LCTB 74/50 (45)

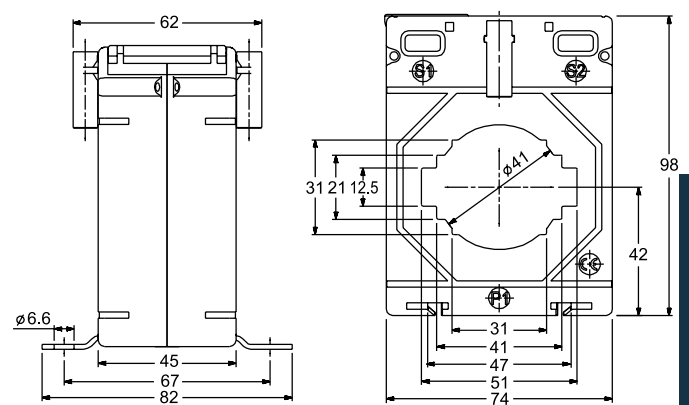

3 YEAR WARRANTY

ORDERING CODES

LCTB 744045

Secondary current	Code
x/5A	5
x/1A	1

Code

5
1

Transformer type	LCTB 74/40 (45)					
Accuracy class	0.25	0.2	0.55	0.5	1	3
Code	S	2	R	-	-	-

LCTB 745045

Secondary current	Code
x/5A	5
x/1A	1

Code

5
1

Transformer type	LCTB 74/50 (45)					
Accuracy class	0.25	0.2	0.55	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0040A	40 A	-	-	-	-	1 VA	1 VA	1
0050A	50 A	-	-	-	-	1 VA	1.5 VA	
0060A	60 A	-	-	-	-	1 VA	1.5 VA	
0075A	75 A	-	-	-	-	1.5 VA	2.5 VA	
0080A	80 A	-	-	-	-	1.5 VA	2.5 VA	
0100A	100 A	1 VA	-	1 VA	1.5 VA	2.5 VA	3.75 VA	5
0120A	120 A	1 VA	-	1 VA	1.5 VA	2.5 VA	3.75 VA	
0125A	125 A	1 VA	-	1 VA	1.5 VA	2.5 VA	3.75 VA	
0150A	150 A	1.5 VA	-	1.5 VA	2.5 VA	3.75 VA	5 VA	
0200A	200 A	2.5 VA	2.5 VA	2.5 VA	3.75 VA	5 VA	7.5 VA	
0250A	250 A	5 VA	2.5 VA	5 VA	5 VA	7.5 VA	10 VA	
0300A	300 A	5 VA	2.5 VA	5 VA	5 VA	7.5 VA	10 VA	
0400A	400 A	5 VA	5 VA	5 VA	5 VA*	7.5 VA	12.5 VA	
0500A	500 A	5 VA	7.5 VA	5 VA	10 VA	15 VA	15 VA	
0600A	600 A	5 VA	10 VA	5 VA	15 VA	20 VA	20 VA	
0750A	750 A	5 VA	10 VA	5 VA	15 VA	20 VA	20 VA	
0800A	800 A	7.5 VA	15 VA	7.5 VA	15 VA	20 VA	25 VA	
1000A	1000 A	10 VA	15 VA	10 VA	15 VA	20 VA	25 VA	

Code	Rated primary current	Transformer burden						Code
0100A	100 A	-	-	-	-	1.5 VA	2 VA	1
0120A	120 A	-	-	-	-	1.5 VA	2.5 VA	
0125A	125 A	-	-	-	-	1.5 VA	2.5 VA	
0150A	150 A	-	-	-	-	2.5 VA	3.75 VA	
0200A	200 A	-	-	-	-	1.5 VA	3.75 VA	
0250A	250 A	1.5 VA	1.5 VA	1.5 VA	2.5 VA	5 VA	7.5 VA	5
0300A	300 A	1.5 VA	1.5 VA	1.5 VA	5 VA	7.5 VA	7.5 VA	
0400A	400 A	2.5 VA	2.5 VA	2.5 VA	5 VA	7.5 VA	10 VA	
0500A	500 A	5 VA	5 VA	5 VA	7.5 VA	10 VA	12.5 VA	
0600A	600 A	5 VA	5 VA*	7.5 VA	5 VA	10 VA	12.5 VA	
0750A	750 A	5 VA	10 VA	5 VA	12.5 VA	15 VA	20 VA	
0800A	800 A	5 VA	10 VA	5 VA	12.5 VA	15 VA	20 VA	
1000A	1000 A	5 VA	10 VA	5 VA	12.5 VA	15 VA	20 VA	

* The custom value of the nominal power, which should be given when ordering the transformer.

* The custom value of the nominal power, which should be given when ordering the transformer.

Ordering example: Order code LCTB 7450450300A55 means the transformer LCTB 74/50(45) 300/5A meeting the requirements of the class: kl. 0.5 - 5 VA; kl. 1 - 7.5 VA; kl. 3 - 7.5 VA

ACCESSORIES:

DIN rail mounting base

Order code: LH000-0904-130-124

LCTB 86 - BUSBAR SERIES



INPUT:

50 A

...
1600 A

OUTPUTS:

5 A


1 A




	LCTB 86/40 (45)	LCTB 86/50 (45)	LCTB 86/60 (45)
Hole diameter	Ø 36 mm	Ø 46 mm	Ø 51 mm
Busbar	40 x 10 mm, 2x30x15 mm	50 x 12 mm, 2 x 40 x 15 mm	60 x 12 mm, 2 x 50 x 15 mm
Depth	45 mm	45 mm	45 mm
Width	86 mm	86 mm	86 mm
Primary current	50 A...1000 A	100 A...1250 A	100 A...1600 A
Secondary current	1 A, 5 A		
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1; 3		

DIMENSIONS


LCTB 86/40 (45)

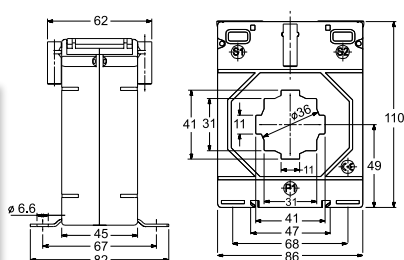

LCTB 86/50 (45)

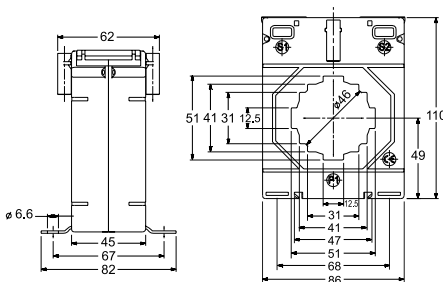

LCTB 86/60 (45)

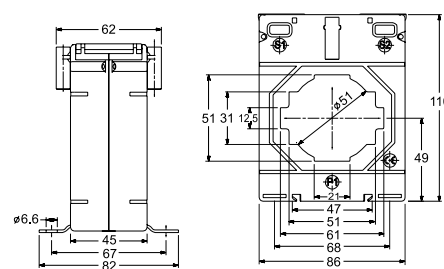

ORDERING CODES

LCTB 864045								
Secondary current		Code						
x/5A		5						
x/1A		1						
Transformer type	LCTB 86/40 (45)							
Accuracy class	0.2S	0.2	0.5S	0.5	1	3		
Code	S	2	R	-	-	-		
Code	Primary current	Transformer burden						Code
0050A	50 A	-	-	-	-	1.5 VA	1.5 VA	1
0060A	60 A	-	-	-	-	1.5 VA	2 VA	
0075A	75 A	-	-	-	-	2.5 VA	3.75 VA	
0080A	80 A	-	-	-	-	2.5 VA	3.75 VA	
0100A	100 A	1.5 VA	1.5 VA	1.5 VA	1.5 VA	3.75 VA	5 VA	
0120A	120 A	1.5 VA	1.5 VA	1.5 VA	2.5 VA	5 VA	7.5 VA	5
0125A	125 A	1.5 VA	1.5 VA	1.5 VA	2.5 VA	5 VA	7.5 VA	
0150A	150 A	2.5 VA	2.5 VA	2.5 VA	3.75 VA	5 VA	7.5 VA	
0200A	200 A	5 VA	2.5 VA	5 VA	5 VA	7.5 VA	10 VA	
0250A	250 A	10 VA	3.75 VA	10 VA	7.5 VA	12.5 VA	15 VA	
0300A	300 A	10 VA	5 VA	10 VA	10 VA	15 VA	20 VA	
0400A	400 A	10 VA	7.5 VA	10 VA	15 VA	20 VA	25 VA	
0500A	500 A	5 VA	10 VA	5 VA	20 VA	30 VA	35 VA	
0600A	600 A	7.5 VA	15 VA	7.5 VA	30 VA	30 VA	35 VA	
0750A	750 A	7.5 VA	15 VA	7.5 VA	30 VA	30 VA	35 VA	
0800A	800 A	10 VA	15 VA	15 VA	30 VA	30 VA	35 VA	
1000A	1000 A	10 VA	15 VA	15 VA	30 VA	30 VA	35 VA	

Ordering example: Order code LCTB 8640450100A55 means the transformer LCTB 86/40(45) 100/5A meeting the requirements of the class:

- kl. 0.5 1.5 VA
- kl. 1 3.75 VA
- kl. 3 5 VA

ORDERING CODES

LCTB 865045 □ □ □ □ □ □ □

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 86/50 (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Primary current	Transformer burden						Code
0100A	100 A	-	-	-	1 VA	1.5 VA	2.5 VA	5
0120A	120 A	-	-	-	1.5 VA	2.5 VA	3.75 VA	
0125A	125 A	-	-	-	1.5 VA	2.5 VA	3.75 VA	
0150A	150 A	-	-	-	2.5 VA	5 VA	7.5 VA	
0200A	200 A	-	-	-	5 VA	7.5 VA	10 VA	
0250A	250 A	-	-	-	7.5 VA	10 VA	12.5 VA	
0300A	300 A	5 VA	1.5 VA	5 VA	7.5 VA	10 VA	15 VA	
0400A	400 A	7.5 VA	2.5 VA	7.5 VA	15 VA	15 VA	20 VA	
0500A	500 A	7.5 VA	5 VA	7.5 VA	15 VA	20 VA	20 VA	
0600A	600 A	10 VA	7.5 VA	10 VA	15 VA	20 VA	20 VA	
0750A	750 A	7.5 VA	10 VA	7.5 VA	15 VA	20 VA	25 VA	
0800A	800 A	10 VA	12.5 VA	10 VA	20 VA	30 VA	30 VA	
1000A	1000 A	12.5 VA	20 VA	12.5 VA	30 VA	30 VA	35 VA	
1200A	1200 A	12.5 VA	20 VA	12.5 VA	30 VA	30 VA	35 VA	
1250A	1250 A	12.5 VA	20 VA	12.5 VA	30 VA	30 VA	35 VA	

Ordering example: Order code LCTB 8650450300A55 means the transformer LCTB 86/50(45) 300/5A meeting the requirements of the class:

- kl. 0.5 7.5 VA
- kl. 1 10 VA
- kl. 3 15 VA

LCTB 866045

Secondary current

Code

x/5A

5

x/1A

1

Transformer type

LCTB 86/60 (45)

Accuracy class

0.2S

0.2

0.5S

0.5

1

3

Code

S

2

R

-

-

-

Code

Primary current

Transformer burden

Code

0100A

100 A

-

-

-

-

1 VA

1.5 VA

0120A

120 A

-

-

-

-

1.5 VA

2.5 VA

0125A

125 A

-

-

-

-

2.5 VA

3.75 VA

0150A

150 A

-

-

-

-

2.5 VA

3.75 VA

0200A

200 A

-

-

-

1.5 VA

3.75 VA

5 VA

0250A

250 A

-

-

-

2.5 VA

5 VA

7.5 VA

0300A

300 A

1.5 VA

1.5 VA

1.5 VA

5 VA

7.5 VA

10 VA

0400A

400 A

2.5 VA

2.5 VA

3.75 VA

10 VA

12.5 VA

15 VA

0500A

500 A

2.5 VA

3.75 VA

2.5 VA

10 VA

12.5 VA

15 VA

0600A

600 A

5 VA

5 VA

5 VA

15 VA

15 VA

20 VA

0750A

750 A

5 VA

10 VA

5 VA

15 VA

20 VA

25 VA

0800A

800 A

7.5 VA

12.5 VA

7.5 VA

20 VA

20 VA

25 VA

1000A

1000 A

10 VA

15 VA

10 VA

20 VA

20 VA

25 VA

1200A

1200 A

10 VA

15 VA

10 VA

20 VA

20 VA

25 VA

1250A

1250 A

10 VA

15 VA

10 VA

20 VA

20 VA

25 VA

1500A

1500 A

10 VA

15 VA

10 VA

20 VA

20 VA

25 VA

1600A

1600 A

10 VA

15 VA

10 VA

20 VA

20 VA

25 VA

ACCESSORIES:
DIN rail mounting base
Order code: LH000-0904-130-124

3 YEAR WARRANTY

shop.lumel.com.pl



ePLAN

LCTB 100 - BUSBAR SERIES



INPUT:

400 A
...
3000 A

OUTPUTS:


5 A 1 A




	LCTB 100/100V (45)	LCTB 100/130V (45)
Busbar	41 x 103 mm	38 x 128 mm
Depth	45 mm	45 mm
Width	100 mm	100 mm
Primary current	400 A...2500 A	400 A...3000 A
Secondary current	1 A, 5 A	
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1	0.2; 0.5; 1

DIMENSIONS

LCTB 100/100V (45)

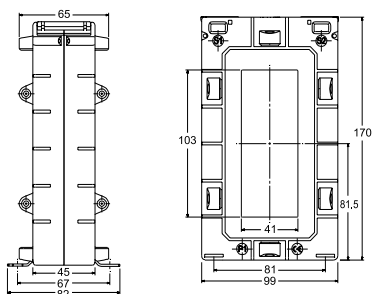

LCTB 100/130V (45)

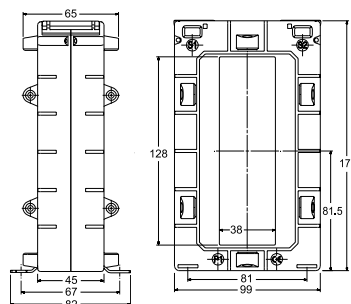

ORDERING CODES

LCTB 100100

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 100/100V (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0400A	400 A	-	-	-	2.5 VA	5 VA	5 VA	5
0500A	500 A	-	-	-	2.5 VA	5 VA	6.25 VA	
0600A	600 A	-	-	-	2.5 VA	5 VA	7.5 VA	
0750A	750 A	-	-	-	2.5 VA	5 VA	7.5 VA	
0800A	800 A	-	-	-	5 VA	10 VA	10 VA	
1000A	1000 A	-	5 VA	-	10 VA	15 VA	15 VA	
1200A	1200 A	5 VA	5 VA	5 VA	10 VA	15 VA	15 VA	
1250A	1250 A	5 VA	5 VA	5 VA	10 VA	15 VA	20 VA	
1500A	1500 A	5 VA	5 VA	5 VA	15 VA	30 VA	30 VA	
1600A	1600 A	7.5 VA	10 VA	7.5 VA	15 VA	30 VA	30 VA	
2000A	2000 A	7.5 VA	10 VA	7.5 VA	15 VA	30 VA	35 VA	5
2500A	2500 A	10 VA	10 VA	10 VA	15 VA	20 VA	35 VA	

LCTB 100130

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 100/130V (45)			
Accuracy class	0.2	0.5	1	3
Code	2	-	-	-

Code	Rated primary current	Transformer burden				Code
0400A	400 A	-	2.5 VA	5 VA	5 VA	5
0500A	500 A	-	2.5 VA	5 VA	6.25 VA	
0600A	600 A	-	2.5 VA	5 VA	7.5 VA	
0750A	750 A	-	2.5 VA	7.5 VA	7.5 VA	
0800A	800 A	-	5 VA	7.5 VA	10 VA	
1000A	1000 A	-	10 VA	10 VA	15 VA	
1200A	1200 A	-	10 VA	15 VA	15 VA	
1250A	1250 A	-	10 VA	15 VA	20 VA	
1500A	1500 A	5 VA	15 VA	30 VA	30 VA	
1600A	1600 A	5 VA	15 VA	30 VA	30 VA	
2000A	2000 A	5 VA	15 VA	30 VA	30 VA	
2500A	2500 A	5 VA	15 VA	30 VA	35 VA	
3000A	3000 A	5 VA	10 VA	12.5 VA	35 VA	

Ordering example: Order code LCTB 1001001500A55 means the transformer LCTB 100/100V(45) 1500/5A meeting the requirements of the class: kl. 0.5 - 15 VA; kl. 1 - 30 VA; kl. 3 - 30 VA

LCTB 104 - BUSBAR SERIES

	LCTB 104/60 (45)	LCTB 104/80 (45)
Hole diameter	Ø 54 mm	Ø 65 mm
Busbar	60 x 12 mm, 2 x 50 x 15 mm, 2 x 40 x 20 mm	80 x 12 mm, 2 x 60 x 15 mm, 2 x 50 x 25 mm
Depth	45 mm	45 mm
Width	104 mm	104 mm
Primary current	100 A...1600 A	200 A...2000 A
Secondary current	1 A, 5 A	
Accuracy class	0,2S; 0,2; 0,5S; 0,5; 1	

INPUT:

100 A
...
2000 A


OUTPUTS:

5 A 1 A




DIMENSIONS

LCTB 104/60 (45)

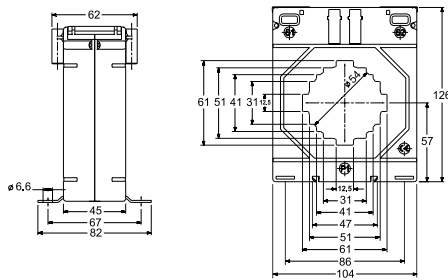

LCTB 104/80 (45)

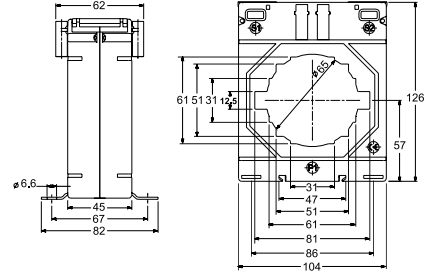

ORDERING CODES

LCTB 104604

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 104/60 (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0100A	100 A	-	-	-	-	1.5 VA	2.5 VA	1
0120A	120 A	-	-	-	-	2.5 VA	3.75 VA	
0125A	125 A	-	-	-	-	2.5 VA	3.75 VA	
0150A	150 A	-	-	-	2.5 VA	5 VA	7.5 VA	
0200A	200 A	-	-	-	5 VA	10 VA	12.5 VA	5
0250A	250 A	-	1.5 VA	-	7.5 VA	12.5 VA	15 VA	
0300A	300 A	1.5 VA	2.5 VA	1.5 VA	10 VA	15 VA	15 VA	
0400A	400 A	2.5 VA	3.75 VA	2.5 VA	5 VA	10 VA*	15 VA	
0500A	500 A	3.75 VA	7.5 VA	3.75 VA	15 VA	20 VA	20 VA	
0600A	600 A	5 VA	10 VA	5 VA	15 VA	30 VA	25 VA	
0750A	750 A	5 VA	15 VA	5 VA	20 VA	30 VA	30 VA	
0800A	800 A	7.5 VA	15 VA	7.5 VA	30 VA	30 VA	35 VA	
1000A	1000 A	10 VA	20 VA	10 VA	30 VA	45 VA	35 VA	
1200A	1200 A	10 VA	30 VA	10 VA	30 VA	45 VA	45 VA	
1250A	1250 A	10 VA	30 VA	10 VA	30 VA	45 VA	50 VA	
1500A	1500 A	10 VA	30 VA	10 VA	30 VA	45 VA	50 VA	
1600A	1600 A	10 VA	30 VA	10 VA	30 VA	45 VA	50 VA	

*The custom value of the nominal power, which should be given when ordering the transformer.

Ordering example: Order code LCTB 1046041500A55 means the transformer LCTB 104/60(45) 1500/5A meeting the requirements of the class: kl. 0.5 - 30 VA; kl. 1 - 45 VA; kl. 3 - 50 VA

LCTB 104804

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 104/80 (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0200A	200 A	-	-	-	-	1.5 VA	2.5 VA	1
0250A	250 A	-	-	-	1.5 VA	2.5 VA	3.75 VA	
0300A	300 A	-	-	-	2.5 VA	7.5 VA	7.5 VA	
0400A	400 A	-	1.5 VA	-	5 VA	10 VA	10 VA	
0500A	500 A	-	1.5 VA	-	5 VA	10 VA	10 VA	5
0600A	600 A	-	2.5 VA	7.5 VA	7.5 VA	12.5 VA	12.5 VA	
0750A	750 A	5 VA	5 VA	7.5 VA	10 VA	15 VA	15 VA	
0800A	800 A	5 VA	7.5 VA	10 VA	10 VA	15 VA	15 VA	
1000A	1000 A	7.5 VA	12.5 VA	15 VA	20 VA	20 VA	20 VA	
1200A	1200 A	10 VA	15 VA	15 VA	20 VA	30 VA	30 VA	
1250A	1250 A	10 VA	15 VA	15 VA	20 VA	30 VA	30 VA	
1500A	1500 A	10 VA	15 VA	15 VA	20 VA	30 VA	30 VA	
1600A	1600 A	10 VA	15 VA	15 VA	20 VA	30 VA	30 VA	
2000A	2000 A	10 VA	15 VA	15 VA	20 VA	30 VA	35 VA	

ACCESSORIES:

DIN rail mounting base

Order code: LH000-0904-130-124

LCTB 140 - BUSBAR SERIES



INPUT:

200 A
...
5000 A

OUTPUTS:

5 A


1 A




	LCTB 140/80 (45)	LCTB 140/100H (45)	LCTB 140/100V (45)	LCTB 140/130V (45)
Hole diameter	Ø 72 mm	Ø 86 mm	Ø 86 mm	-
Busbar	80 x 30 mm, 2 x 60 x 25 mm	100 x 30 mm, 2 x 80 x 25 mm, 2 x 70 x 30 mm	100 x 30 mm, 2 x 80 x 25 mm, 2 x 70 x 30 mm	70 x 130 mm
Depth	45 mm	45 mm	45 mm	45 mm
Width	140 mm	140 mm	140 mm	140 mm
Primary current	200 A...2000 A	200 A...4000 A	200 A...3000 A	400 A...5000 A
Secondary current	1 A, 5 A			
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1			0.2; 0.5; 1

DIMENSIONS

LCTB 140/80 (45)

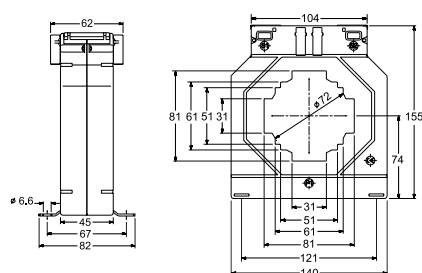

LCTB 140/100H (45)

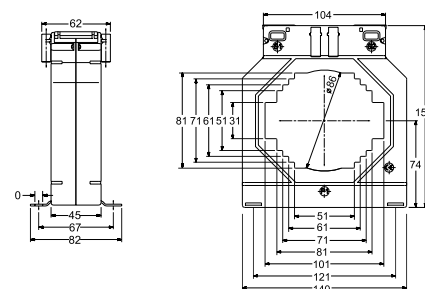

ORDERING CODES

LCTB 140804

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 140/80 (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0200A	200 A	-	-	-	2.5 VA	5 VA	7.5 VA	S
0250A	250 A	-	-	-	5 VA	10 VA	12.5 VA	
0300A	300 A	-	1.5 VA	-	7.5 VA	15 VA	15 VA	
0400A	400 A	-	2.5 VA	-	10 VA	20 VA	25 VA	
0500A	500 A	2.5 VA	5 VA	2.5 VA	15 VA	30 VA	30 VA	
0600A	600 A	3.75 VA	7.5 VA	3.75 VA	15 VA	30 VA	35 VA	
0750A	750 A	5 VA	10 VA	5 VA	15 VA	45 VA	45 VA	
0800A	800 A	5 VA	10 VA	5 VA	15 VA	45 VA	50 VA	
1000A	1000 A	10 VA	15 VA	10 VA	30 VA	60 VA	60 VA	
1200A	1200 A	12.5 VA	15 VA	12.5 VA	30 VA	60 VA	60 VA	
1250A	1250 A	12.5 VA	30 VA	12.5 VA	60 VA	60 VA	60 VA	
1500A	1500 A	15 VA	30 VA	15 VA	60 VA	60 VA	60 VA	
1600A	1600 A	15 VA	30 VA	15 VA	60 VA	60 VA	60 VA	
2000A	2000 A	15 VA	30 VA	15 VA	60 VA	60 VA	60 VA	

LCTB 14010H

Secondary current	Code
x/5A	5
x/1A	1


Transformer type	LCTB 140/100H (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0200A	200 A	-	-	-	1.5 VA	3.75 VA	5 VA	S
0250A	250 A	-	-	-	2.5 VA	5 VA	7.5 VA	
0300A	300 A	-	-	-	3.75 VA	7.5 VA	10 VA	
0400A	400 A	-	1.5 VA	-	7.5 VA	10 VA	12.5 VA	
0500A	500 A	-	2.5 VA	-	10 VA	12.5 VA	12.5 VA	
0600A	600 A	2.5 VA	3.75 VA	2.5 VA	10 VA	15 VA	15 VA	
0750A	750 A	5 VA	5 VA	5 VA	15 VA	20 VA	20 VA	
0800A	800 A	5 VA	5 VA	5 VA	15 VA	20 VA	25 VA	
1000A	1000 A	5 VA	10 VA	5 VA	15 VA	20 VA	25 VA	
1200A	1200 A	10 VA	15 VA	10 VA	15 VA	30 VA	30 VA	
1250A	1250 A	10 VA	15 VA	10 VA	15 VA	30 VA	35 VA	
1500A	1500 A	15 VA	20 VA	15 VA	20 VA	30 VA	40 VA	
1600A	1600 A	15 VA	20 VA	15 VA	20 VA	45 VA	45 VA	
2000A	2000 A	15 VA	30 VA	15 VA	45 VA	45 VA	45 VA	
2500A	2500 A	15 VA	30 VA	15 VA	45 VA	45 VA	45 VA	
3000A	3000 A	15 VA	30 VA	15 VA	60 VA	60 VA	60 VA	
4000A	4000 A	15 VA	30 VA	15 VA	60 VA	60 VA	60 VA	


Ordering example: Order code LCTB 1408041500A55 means the transformer LCTB 140/80(45) 1500/5A meeting the requirements of the class: kl. 0.5 - 60 VA; kl. 1 - 60 VA; kl. 3 - 60 VA

DIMENSIONS

LCTB 140/100V (45)

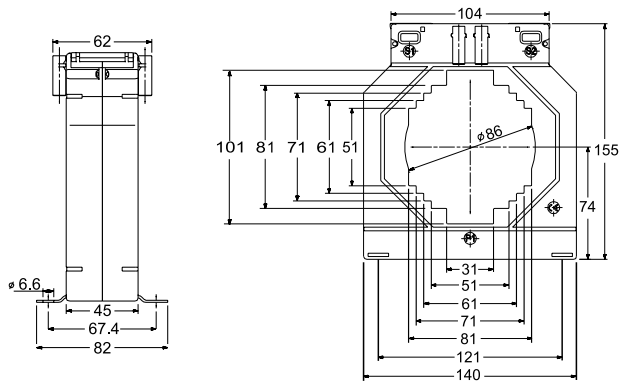

LCTB 140/130V (45)

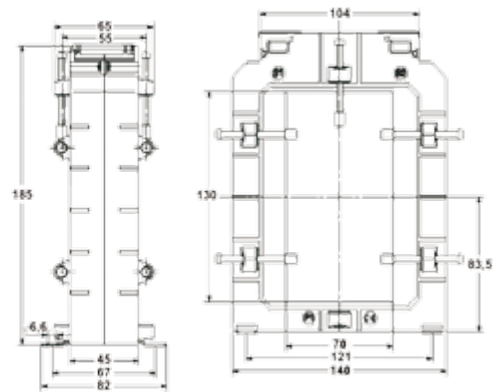

ORDERING CODES

LCTB 14010V

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 140/100V (45)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0200A	200 A	-	-	-	1.5 VA	3.75 VA	5 VA	5
0250A	250 A	-	-	-	2.5 VA	5 VA	5 VA	
0300A	300 A	-	-	-	3.75 VA	7.5 VA	10 VA	
0400A	400 A	-	1.5 VA	-	10 VA	10 VA	12.5 VA	
0500A	500 A	-	2.5 VA	-	10 VA	12.5 VA	12.5 VA	
0600A	600 A	2.5 VA	3.75 VA	2.5 VA	12.5 VA	15 VA	15 VA	
0750A	750 A	5 VA	5 VA	5 VA	15 VA	20 VA	20 VA	
0800A	800 A	5 VA	5 VA	5 VA	15 VA	20 VA	20 VA	
1000A	1000 A	5 VA	10 VA	5 VA	15 VA	20 VA	20 VA	
1200A	1200 A	10 VA	15 VA	10 VA	15 VA	30 VA	30 VA	
1250A	1250 A	10 VA	15 VA	10 VA	15 VA	30 VA	30 VA	
1500A	1500 A	15 VA	20 VA	15 VA	30 VA	30 VA	35 VA	
1600A	1600 A	15 VA	20 VA	15 VA	45 VA	45 VA	45 VA	
2000A	2000 A	15 VA	30 VA	15 VA	45 VA	45 VA	45 VA	
2500A	2500 A	15 VA	30 VA	15 VA	45 VA	45 VA	45 VA	
3000A	3000 A	15 VA	30 VA	15 VA	60 VA	60 VA	60 VA	

LCTB 140130

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 140/130V (45)			
Accuracy class	0.2	0.5	1	3
Code	2	-	-	-

Code	Rated primary current	Transformer burden				Code
0400A	400 A	-	3.75 VA	5 VA	6.25 VA	5
0500A	500 A	-	3.75 VA	5VA	7.5 VA	
0600A	600 A	-	3.75 VA	5 VA	7.5 VA	
0750A	750 A	-	5 VA	7.5 VA	10 VA	
0800A	800 A	-	5 VA	7.5 VA	10 VA	
1000A	1000 A	5 VA	10 VA	10 VA	15 VA	
1200A	1200 A	7.5 VA	10 VA	15 VA	20 VA	
1250A	1250 A	7.5 VA	10 VA	15 VA	20 VA	
1500A	1500 A	10VA	15 VA	15 VA	20 VA	
1600A	1600 A	10 VA	15 VA	15 VA	20 VA	
2000A	2000 A	15 VA	20 VA	20 VA	20 VA	
2500A	2500 A	15 VA	20 VA	20 VA	25 VA	
3000A	3000 A	15 VA	20 VA	20 VA	25 VA	
4000A	4000 A	15 VA	20 VA	20 VA	35 VA	
5000A	5000 A	15 VA	20 VA	20 VA	35 VA	

Ordering example: Order code LCTB 14010V1000A55 means the transformer LCTB 140/100V(45) 1000/5A meeting the requirements of the class:

- kl. 0.5 15 VA
- kl. 1 20 VA
- kl. 3 20 VA

3 YEAR WARRANTY

shop.lumel.com.pl



ePLAN

LCTB 225 - BUSBAR SERIES



INPUT:

600 A
...
7500 A

OUTPUTS:

5 A


1 A




	LCTB 225/125 (50)	LCTB 225/167 (50)
Busbar	124 x 93 mm	166 x 65 mm
Depth	50 mm	50 mm
Width	225 mm	225 mm
Primary current	600 A...6000 A	1000 A...7500 A
Secondary current	1 A, 5 A	
Accuracy class	0.2S; 0.2; 0.5S; 0.5; 1; 3	

DIMENSIONS

LCTB 225/125 (50)

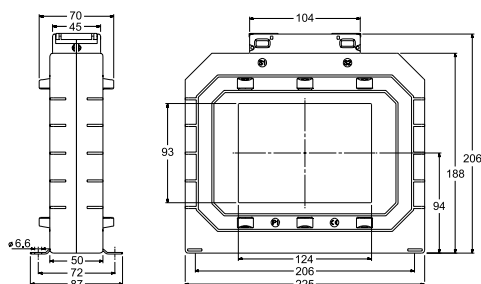

LCTB 225/167 (50)

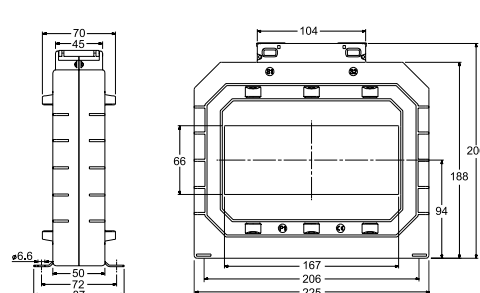

ORDERING CODES

LCTB 225125

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 225/125 (50)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
0600A	600 A	-	5 VA	-	5 VA	10 VA	12.5 VA	5
0750A	750 A	-	5 VA	-	10 VA	10 VA	12.5 VA	
0800A	800 A	-	5 VA	-	10 VA	10 VA	15 VA	
1000A	1000 A	5 VA	10 VA	5 VA	10 VA	15 VA	15 VA	
1200A	1200 A	5 VA	10 VA	5 VA	10 VA	15 VA	20 VA	
1250A	1250 A	5 VA	10 VA	5 VA	10 VA	15 VA	20 VA	
1500A	1500 A	7.5 VA	10 VA	7.5 VA	15 VA	30 VA	30 VA	
1600A	1600 A	7.5 VA	10 VA	7.5 VA	15 VA	30 VA	35 VA	
2000A	2000 A	10 VA	10 VA	10 VA	15 VA	30 VA	35 VA	
2500A	2500 A	10 VA	15 VA	10 VA	30 VA	30 VA	45 VA	
3000A	3000 A	10 VA	15 VA	10 VA	30 VA	60 VA	60 VA	
4000A	4000 A	15 VA	30 VA	15 VA	45 VA	60 VA	60 VA	
5000A	5000 A	15 VA	30 VA	15 VA	100 VA	100 VA	100 VA	
6000A	6000 A	15 VA	60 VA	15 VA	100 VA	100 VA	100 VA	

LCTB 225167

Secondary current	Code
x/5A	5
x/1A	1

Transformer type	LCTB 225/167 (50)					
Accuracy class	0.2S	0.2	0.5S	0.5	1	3
Code	S	2	R	-	-	-

Code	Rated primary current	Transformer burden						Code
1000A	1000 A	-	3.75 VA	-	5 VA	10 VA	15 VA	5
1200A	1200 A	-	5 VA	-	10 VA	15 VA	20 VA	
1250A	1250 A	-	5 VA	-	10 VA	15 VA	20 VA	
1500A	1500 A	5 VA	10 VA	5 VA	15 VA	30 VA	30 VA	
1600A	1600 A	5 VA	10 VA	5 VA	15 VA	30 VA	35 VA	
2000A	2000 A	7.5 VA	10 VA	7.5 VA	30 VA	30 VA	35 VA	
2500A	2500 A	10 VA	15 VA	10 VA	30 VA	45 VA	45 VA	
3000A	3000 A	10 VA	15 VA	10 VA	30 VA	45 VA	50 VA	
4000A	4000 A	10 VA	15 VA	10 VA	30 VA	45 VA	50 VA	
5000A	5000 A	15 VA	20 VA	15 VA	30 VA	45 VA	50 VA	
6000A	6000 A	15 VA	20 VA	15 VA	30 VA	45 VA	50 VA	
7500A	7500 A	15 VA	20 VA	15 VA	30 VA	45 VA	50 VA	

Ordering example: Order code LCTB 2251251500A55 means the transformer LCTB 225/125(50) 1500/5A meeting the requirements of the class: kl. 0.5 - 15 VA; kl. 1 - 30 VA; kl. 3 - 30 VA

LCTS - SPLIT CORE SERIES

	LCTS 93/30SC (40)	LCTS 125/50SC (40)	LCTS 155/80SC (40)	LCTS 195/80SC (64)
Window dimensions	23 x 33 mm	85 x 54 mm	85 x 125 mm	82 x 162 mm
Depth	40 mm	40 mm	40 mm	64 mm
Width	93 mm	125 mm	155 mm	195 mm
Rated primary current	100 A...400 A	250 A...1000 A	250 A...3000 A	500 A...5000 A
Secondary current	1 A, 5 A			
Accuracy class	0.5; 1			

INPUT:

100 A
...
5000 A



OUTPUTS:

5 A 1 A



3 YEAR WARRANTY


shop.lumel.com.pl




ePLAN

DIMENSIONS

LCTS 93/30SC (40)

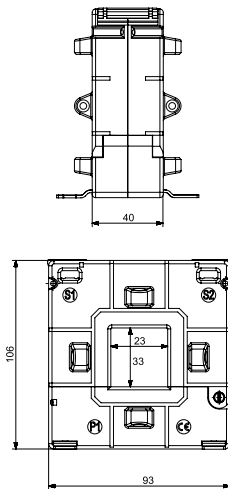

LCTS 125/50SC, 155/80SC, 195/80SC

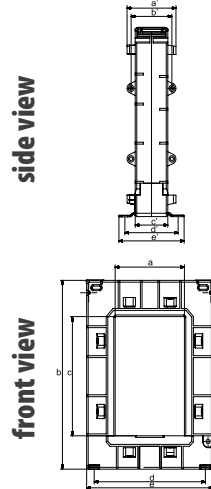

Side view (dimensions in mm)


Type	a'	b'	c'	d'	e'
125/50SC (40)	60	50	40	65	80
155/80SC (40)	60	50	40	65	80
195/80SC (64)	84	74	64	80	100

Front view (dimensions in mm)

Type	a	b	c	d	e
125/50SC (40)	54	158	85	106	125
155/80SC (40)	85	198	125	136	155
195/80SC (64)	80	245	160	179	195

ORDERING CODES

Transformer type		LCTS 93/30SC (40)		LCTS 125/50SC (40)		LCTS 155/80SC (40)		LCTS 195/80SC (64)	
Accuracy class		0.5	1	0.5	1	0.5	1	0.5	1
Code		5	1	5	1	5	1	5	1
Code	Primary current	Transformer burden							
0100A	100 A	-	1.5 VA	-	-	-	-	-	-
0150A	150 A	-	1.75 VA	-	-	-	-	-	-
0200A	200 A	-	2.5 VA	-	-	-	-	-	-
0250A	250 A	-	3.75 VA	1 VA	2.5 VA	1 VA	2.5 VA	-	-
0300A	300 A	2.5 VA	5 VA	2.5 VA	3.75 VA	1.5 VA	3.75 VA	-	-
0400A	400 A	3.75 VA	6.25 VA	2.5 VA	3.75 VA	2.5 VA	3.75 VA	-	-
0500A	500 A	-	-	3.75 VA	5 VA	3.75 VA	5 VA	1.25 VA	5 VA
0600A	600 A	-	-	5 VA	7.5 VA	5 VA	7.5 VA	1.25 VA	5 VA
0750A	750 A	-	-	7.5 VA	10 VA	7.5 VA	10 VA	5 VA	10 VA
0800A	800 A	-	-	7.5 VA	10 VA	7.5 VA	10 VA	7.5 VA	10 VA
1000A	1000 A	-	-	10 VA	15 VA	10 VA	15 VA	10 VA	20 VA
1200A	1200 A	-	-	-	-	15 VA	30 VA	15 VA	20 VA
1250A	1250 A	-	-	-	-	15 VA	30 VA	15 VA	20 VA
1500A	1500 A	-	-	-	-	20 VA	45 VA	20 VA	30 VA
1600A	1600 A	-	-	-	-	20 VA	45 VA	20 VA	30 VA
2000A	2000 A	-	-	-	-	20 VA	45 VA	25 VA	30 VA
2500A	2500 A	-	-	-	-	25 VA	45 VA	25 VA	30 VA
3000A	3000 A	-	-	-	-	30 VA	45 VA	30 VA	45 VA
4000A	4000 A	-	-	-	-	-	-	30 VA	45 VA
5000A	5000 A	-	-	-	-	-	-	30 VA	45 VA

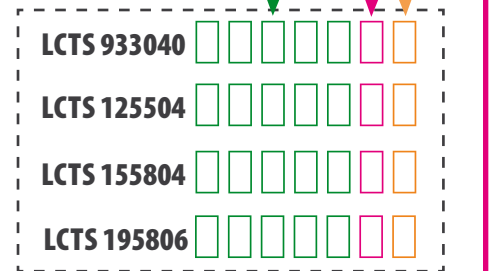

Secondary current	Code
x/5A	5
x/1A	1

Ordering example: Order code LCTS 9330400300A55 means the transformer LCTS 93/30SC(40) 300/5A ; Class 0.5; power 2.5VA

LCTS - SPLIT CORE SERIES | COMPACT VERSION

NEW



INPUT:

150 A
...
500 A

OUTPUTS:

5 A

1 A



	LCTS 50/18SC	LCTS 50/32SC
Hole diameter	18.5 mm	32.5 mm
Depth	65.2 mm	65.2 mm
Width	61.4 mm	61.4 mm
Primary current	150 A...250 A	250 A...500 A
Secondary current	1 A, 5 A	
Accuracy class	1	


GENERAL SPECIFICATION:

Applicable standards:	IEC 61869-1/2
Thermal nominal continuous rated current (I_{cth}):	1.2 x I_n
Thermal nominal short time current (I_{dyn}):	60 x I_n , 1 sek
Maximum Operating Voltage:	0.72 kV
Rated Frequency:	50/60 Hz
Insulation Test Voltage:	3 kV, 1 Min.
Insulation Class:	E
Ambient temperature range:	-20°C ... +45°C
Storage temperature range:	-30°C ... +60°C
Ratios ranging:	from 150/1 up to 500/5
Accuracy Class:	1
Suitable only for mounting on insulated primary conductor.	
To be used in weather protected & dry location.	



FEATURES:


- Hinged Split Core.
- Swing open for ease of installation.
- Compact size.
- Two options for Bus Bar Mounting.
- Cable Tie provision for faster installation.
- Safety Plug in shorting link.
- Available with M4 Size Terminals.
- Provided with 3 Meter wire for 1A Output.
- Provided with 1 Meter wire for 5A Output.
- Wide range of system current ratings.
- Assured Core contact with Latching Type Snap fitment.
- Vibration Resistant Design.




Locking Profile to avoid Accidental Opening.

DIMENSIONS

LCTS 50/18SC

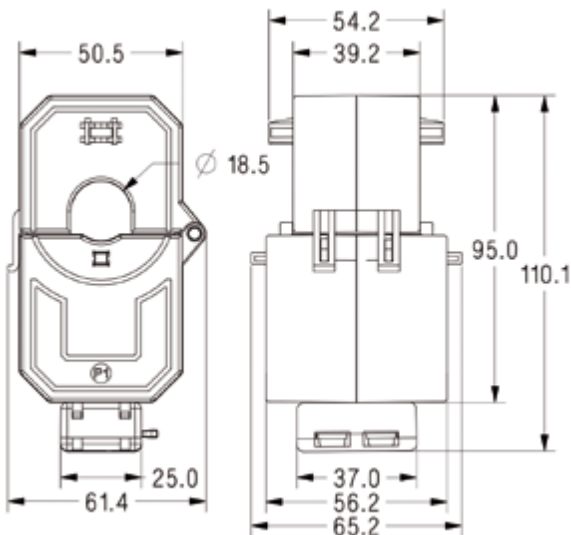

LCTS 50/32SC

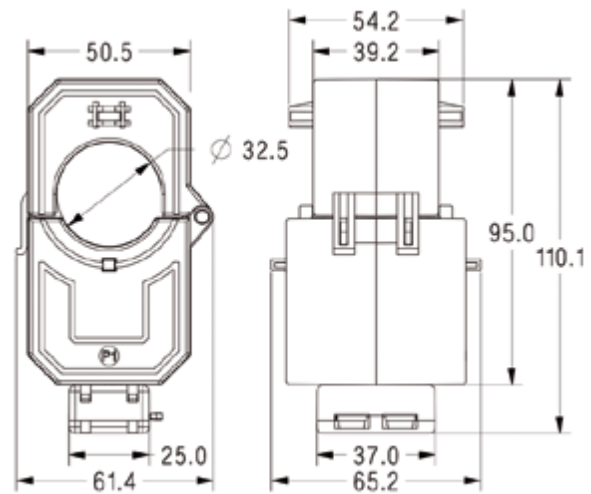

ORDERING CODES

Transformer type			
		LCTS 50/18SC	LCTS 50/32SC
Accuracy class		1	1
Code		1	1

Code	Primary current	Transformer burden	
0150A	150 A	0.2 VA	-
0200A	200 A	0.2 VA	-
0250A	250 A	1 VA	0.2 VA
0300A	300 A	-	0.2 VA
0400A	400 A	-	0.2 VA
0500A	500 A	-	0.2 VA

LCTS 501850

LCTS 503250

Secondary current	Code
x/5A	5
x/1A	1

Ordering example: Order code a LCTS 5032500500A5 means the transformer LCTS 50/32SC 500/5A ; Class 1; power 0.2VA


3 YEAR WARRANTY

shop.lumel.com.pl



ePLAN

LCTP - 3-PHASE BUSBAR SERIES



INPUT:

100 A
...
500 A

OUTPUT:


5 A 1 A




	LCTP 75/15 (60)	LCTP 105/21 (40)	LCTP 140/31 (40)
Busbar	14 x 24 mm	20 x 24 mm	31 x 36 mm
Depth	60 mm	40 mm	40 mm
Width	76.5 mm	105 mm	140 mm
Primary current	100...160 A	100...250 A	250...500 A
Secondary current	5 A; 1 A		
Accuracy class	0.5; 1		

DIMENSIONS


LCTP 75/15 (60)

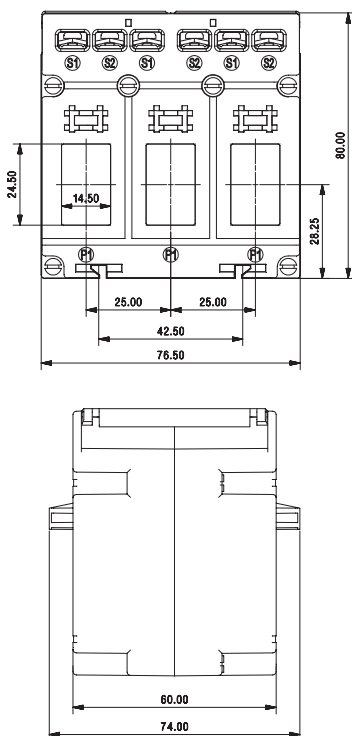

LCTP 105/21 (40)

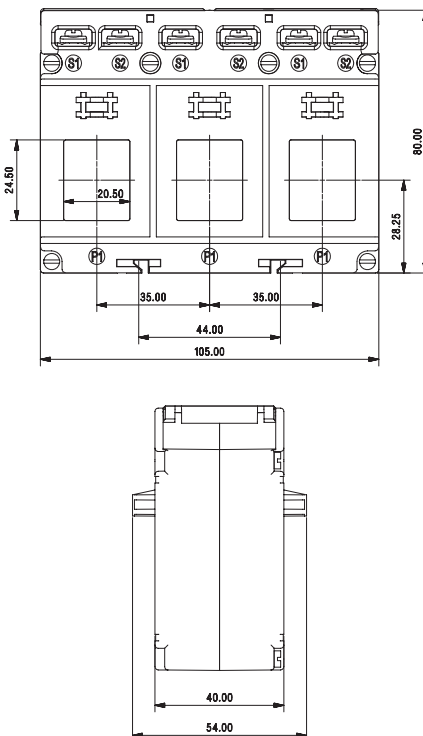

LCTP 140/31 (40)

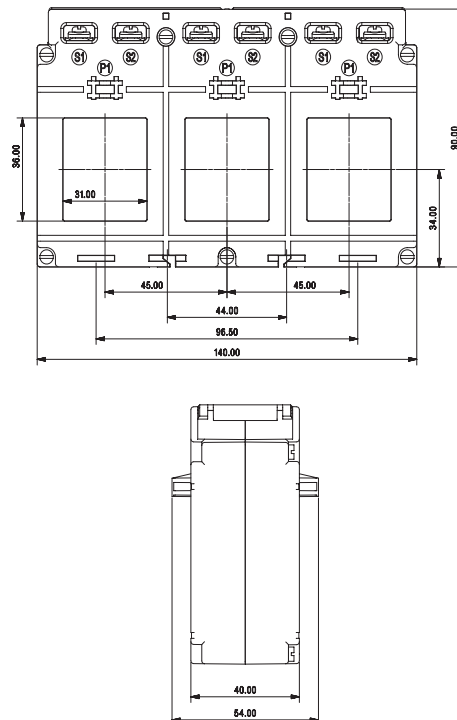

ORDERING CODES

Transformer type		LCTP 75/15 (60)		LCTP 105/21 (40)		LCTP 140/31 (40)	
Accuracy class		0.5	1	0.5	1	0.5	1
Code		5	1	5	1	5	1
Code	Primary current	Transformer burden					
0100A	100 A	-	1 VA	-	1 VA	-	-
0125A	125 A	-	1.5 VA	-	1.5 VA	-	-
0150A	150 A	1.5 VA	1.5 VA	-	1.5 VA	-	-
0160A	160 A	1.5 VA	1.5 VA	1.5 VA	1.5 VA	-	-
0200A	200 A	-	-	1.5 VA	1.5 VA	-	-
0250A	250 A	-	-	1.5 VA	1.5 VA	1.5 VA	1.5 VA
0300A	300 A	-	-	-	-	2.5 VA	2.5 VA
0400A	400 A	-	-	-	-	2.5 VA	2.5 VA
0500A	500 A	-	-	-	-	2.5 VA	2.5 VA
0600A	600 A	-	-	-	-	2.5 VA	2.5 VA
0630A	630 A	-	-	-	-	2.5 VA	2.5 VA

Secondary current	Code
x/5A	5
x/1A	1

LCTP 751560						
LCTP 105214						
LCTP 140314						

Ordering example: Order code LCTP 7515600150A55 means the transformer LCTP 75/15(60) 150/5A; Class 0.5; power 1.5VA

ACCESSORIES:
DIN rail mounting base
Order code: LH000-0904-130-124

LCTP - 3-PHASE BUSBAR SERIES

	LCTP 185/27 (45)	LCTP 185/37 (45)
Hole diameter	Ø 27 mm	Ø 37 mm
Depth	45 mm	45 mm
Width	185 mm	185 mm
Primary current	100...500 A	300...800 A
Secondary current	5A; 1 A	
Accuracy class	1	

INPUT:

100 A
...
800 A


OUTPUT:

5 A 1 A




DIMENSIONS

LCTP 185/27 (45)

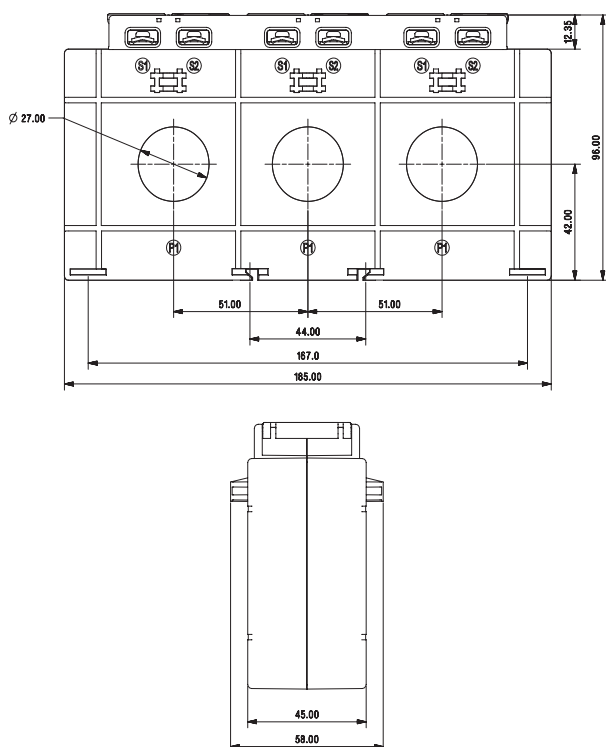

LCTP 185/37 (45)

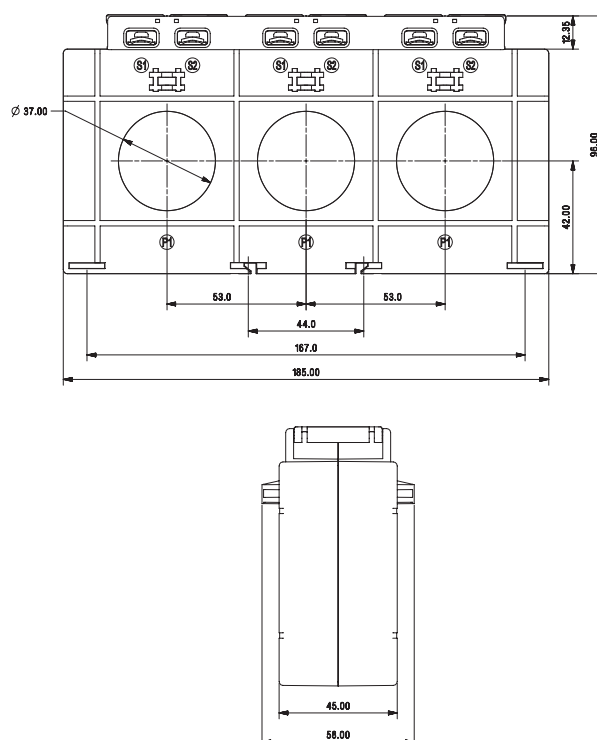

ORDERING CODES

		Transformer type	LCTP 185/27 (45)	LCTP 185/37 (45)
		Accuracy class	1	1
		Code	1	1
Code	Primary current	Transformer burden		
0100A	100 A	1.5 VA	-	
0150A	150 A	1.5 VA	-	
0200A	200 A	2.5 VA	-	
0250A	250 A	2.5 VA	-	
0300A	300 A	5 VA	2.5 VA	
0400A	400 A	5 VA	5 VA	
0500A	500 A	5 VA	5 VA	
0600A	600 A	-	5 VA	
0800A	800 A	-	5 VA	

Secondary current	Code
x/5A	5
x/1A	1

LCTP 185274

LCTP 185374


Ordering example: Order code LCTP 1852740150A51 means the transformer LCTP 185/27(45) 150/5A; Class 1; power 1.5VA

ACCESSORIES:

DIN rail mounting base

Order code: LH000-0904-130-124

LRC - RESIN CAST SERIES

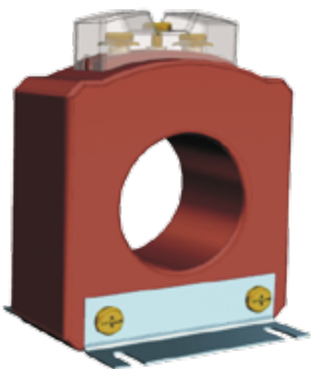

INPUT:

60 A
...
320 A

OUTPUT:


5 A 1 A




	LRC1 80/30(50)	LRC2 90/50(40)
Hole diameter	Ø 30 mm	Ø 50 mm
Depth	50 mm	40 mm
Width	80 mm	90 mm
Primary current	60 A...160 A	200 A...320 A
Secondary current	1 A, 5 A	
Accuracy class	1	

DIMENSIONS

LRC1 80/30(50)

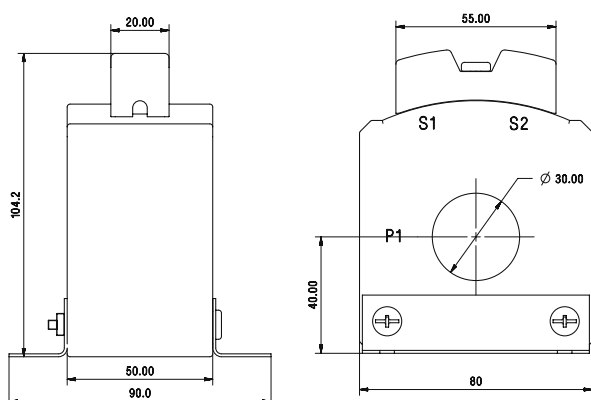

LRC2 90/50(40)

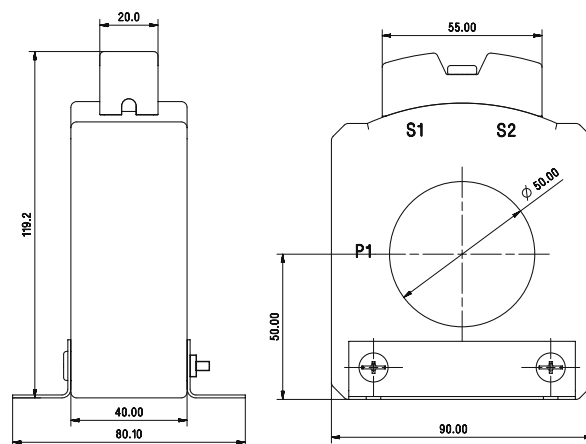

ORDERING CODES

Transformer type		LRC1 80/30(50)		LRC2 90/50(40)	
Accuracy class		0.5	1	0.5	1
Code		5	1	5	1
Code	Primary current	Transformer burden			
0060A	60 A	-	1.5 VA	-	-
0075A	75 A	2.5 VA	1.5 VA	-	-
0100A	100 A	2.5 VA	5 VA	-	-
0125A	125 A	3.75 VA	5 VA	-	-
0150A	150 A	3.75 VA	5 VA	-	-
0160A	160 A	3.75 VA	5 VA	-	-
0200A	200 A	-	3.75 VA	5 VA	-
0250A	250 A	-	3.75 VA	10 VA	-
0300A	300 A	-	5 VA	10 VA	-
0320A	320 A	-	5 VA	10 VA	-

Secondary current	Code
x/5A	5
x/1A	1

LRC1 803050

LRC2 905040

Ordering example: Order code LRC1 8030500150A51 means the transformer LRC1 80/30(50) 150/5A; Class 1; power 5VA

LRC - RESIN CAST SERIES

	LRC3 110/72(40)	LRC4 135/85(40)
Hole diameter	Ø 72 mm	Ø 85 mm
Depth	40 mm	40 mm
Width	110 mm	135 mm
Primary current	400 A...630 A	800 A...1250 A
Secondary current	1 A, 5 A	
Accuracy class	1	


INPUT:

400 A
...
1250 A

OUTPUTS:

5 A


1 A

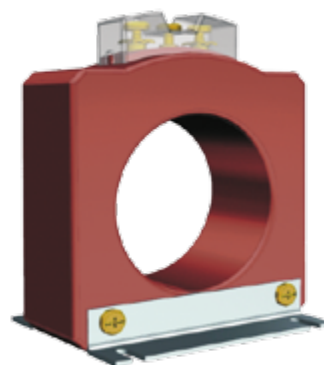


3 YEAR WARRANTY

DIMENSIONS

LRC3 110/72(40)

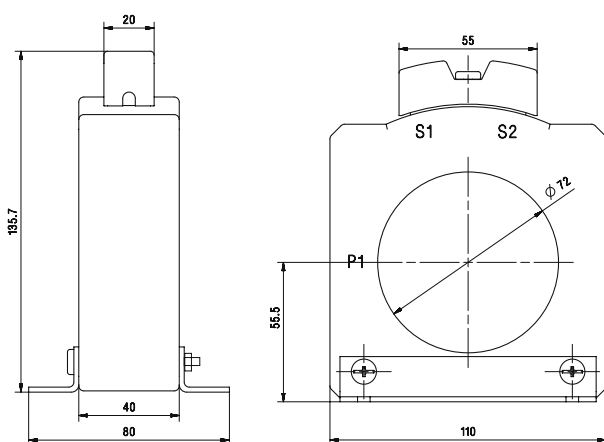

LRC4 135/85(40)

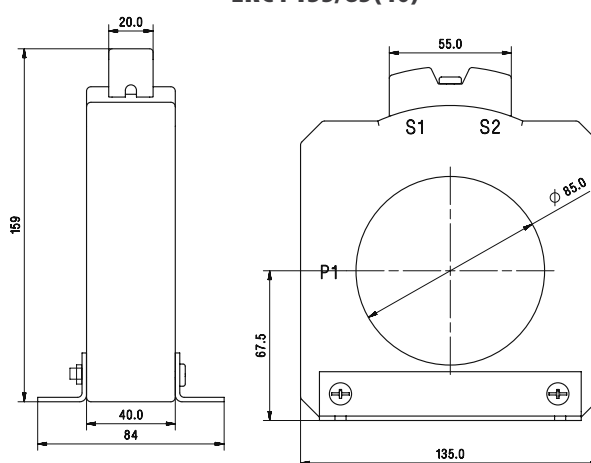

ORDERING CODES


Transformer type		LRC3 110/72(40)		LRC4 135/85(40)	
Accuracy class		0.5	1	0.5	1
Code		5	1	5	1
Code	Primary current	Transformer burden			
0400A	400 A	5 VA	10 VA	-	-
0500A	500 A	7.5 VA	15 VA	-	-
0600A	600 A	15 VA	15 VA	-	-
0630A	630 A	15 VA	15 VA	-	-
0800A	800 A	-	-	15 VA	15 VA
1000A	1000 A	-	-	15 VA	15 VA
1200A	1200 A	-	-	15 VA	15 VA
1250A	1250 A	-	-	15 VA	15 VA

Secondary current	Code
x/5A	5
x/1A	1

LRC3 110724						
LRC4 135854						

Ordering example: Order code LRC3 1107240500A51 means the transformer LRC3 110/72(40) 500/5A; Class 1; power 15VA

LRC - RESIN CAST SERIES



INPUT:

1500 A
...
3200 A


OUTPUTS:

5 A | 1 A


	LRC5 165/115(40)	LRC6 195/130(40)
Hole diameter	Ø 115 mm	Ø 130 mm
Depth	40 mm	40 mm
Width	165 mm	195 mm
Primary current	1500 A...2000 A	2500 A...3200 A
Secondary current	1 A, 5 A	
Accuracy class	1	

DIMENSIONS

LRC5 165/115(40)

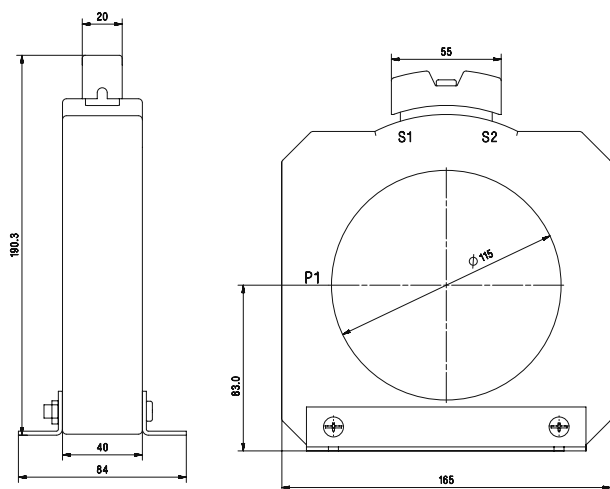

LRC6 195/130(40)

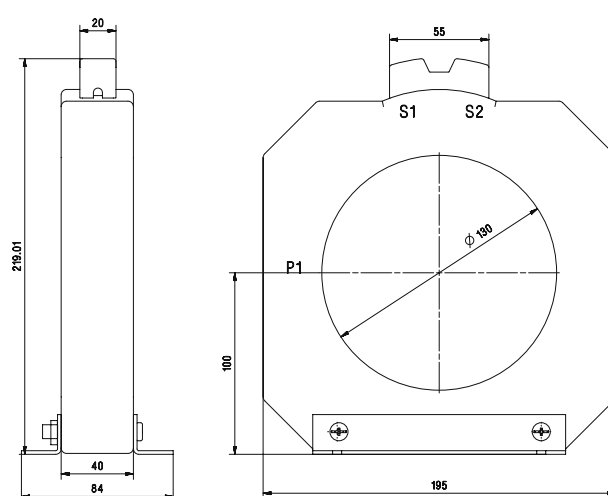

ORDERING CODES

Transformer type		LRC5 165/115(40)		LRC6 195/130(40)	
Accuracy class	0.5	1	0.5	1	
Code	5	1	5	1	

Code	Primary current	Transformer burden			
1500A	1500 A	15 VA	15 VA	-	-
1600A	1600 A	15 VA	15 VA	-	-
2000A	2000 A	15 VA	15 VA	-	-
2500A	2500 A	-	-	15 VA	15 VA
3000A	3000 A	-	-	15 VA	15 VA
3200A	3200 A	-	-	15 VA	15 VA

Secondary current	Code
x/5A	5
x/1A	1

LRC5 165115

LRC6 195130

Ordering example: Order code LRC5 1651151500A51 means the transformer LRC5 165 (115VA @ 1500/5A), Class 1, power 15VA

LRC - RESIN CAST SERIES

	LRC7 230/165(40)	LRC8 295/200(40)
Hole diameter	Ø 165 mm	Ø 200 mm
Depth	40 mm	40 mm
Width	230 mm	295 mm
Primary current	3000 A...3200 A	4000 A....5000 A
Secondary current	1 A, 5 A	
Accuracy class	1	


INPUT:

3000 A
...
5000 A

OUTPUTS:

5 A


1 A

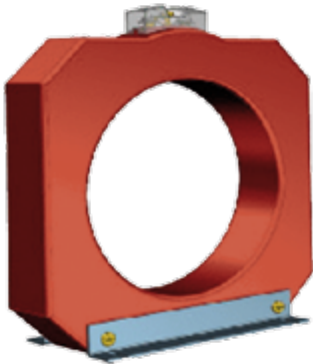


3 YEAR WARRANTY

DIMENSIONS

LRC7 230/165(40)

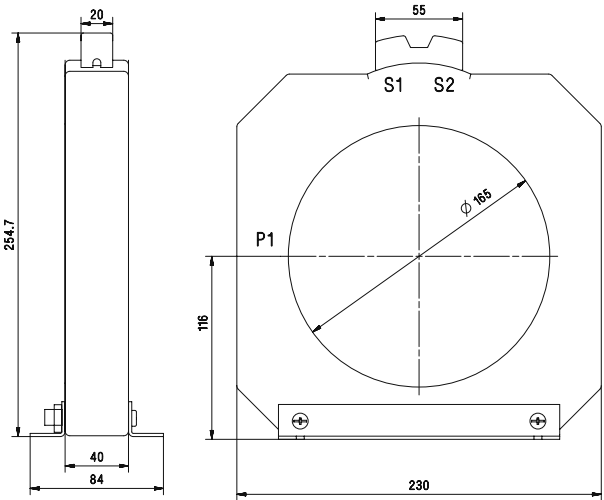

LRC8 295/200(40)

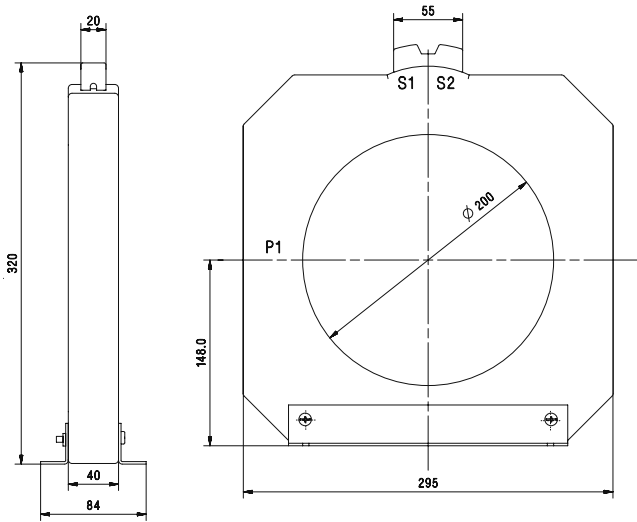

shop.lumel.com.pl



ePLAN

ORDERING CODES

Transformer type		LRC7 230/165(40)		LRC8 295/200(40)	
Accuracy class		0.5	1	0.5	1
Code		5	1	5	1
Code	Primary current	Transformer burden			
3000A	3000 A	15 VA	15 VA	-	-
3200A	3200 A	15 VA	15 VA	-	-
4000A	4000 A	-	-	15 VA	15 VA
5000A	5000 A	-	-	15 VA	15 VA

Secondary current	Code
x/5A	5
x/1A	1


LRC7 230165

LRC8 295200

Ordering example: Order code LRC7 2301653200A51 means the transformer LRC7 230/165(40) 3200/5A; Class 1; power 15VA

LU01 - SUMMATION CURRENT TRANSFORMERS

SUMMATION CURRENT TRANSFORMER are designed to summarize several synchronous alternating currents of equal phase relation with any angle of phase difference. They are used to add secondary currents of several main c.t.'s in order to measure with the CT only.

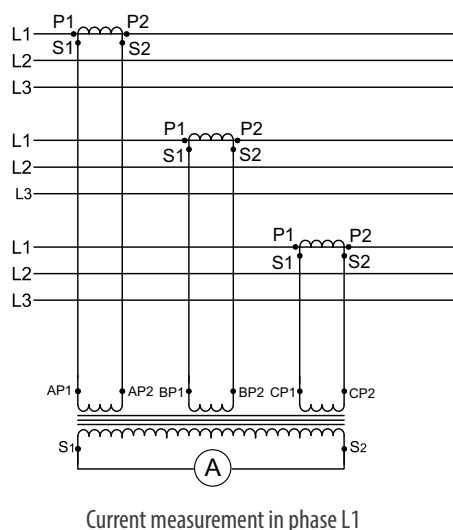

AN EXAMPLE OF POWER SELECTION FOR MAIN TRANSFORMERS WITH DIFFERENT TRANSMISSIONS

Main Transformer ratio:

$$\begin{array}{r} 500/5A \\ 400/5A \\ 300/5A \\ \hline \text{Total current} = 1200/5A \end{array}$$

Burden - 1 Ammeter

Required Active performance of the Current Transformer:

Ammeter	1.5 VA
Measurement Conductor Loss	1.5 VA
Consumption in Summation CT	4.0 VA
Total VA	7.0 VA

The individual main transformer must provide it's VA share from this 7.0 VA.

1. Main transformer 500/ 5A $(500/ 1200) \times 7 = 2.92 \text{ VA} + \text{additional losses} \approx 3.75 \text{ VA}^*$
2. Main transformer 400/ 5A $(400/ 1200) \times 7 = 2.33 \text{ VA} + \text{additional losses} \approx 2.5 \text{ VA}^*$
3. Main transformer 300/ 5A $(300/ 1200) \times 7 = 1.75 \text{ VA} + \text{additional losses} \approx 2.5 \text{ VA}^*$

* The VA values of the main transformer are to be rounded up to the corresponding values in our chart.

Note: If using unequal main c.t.'s than ration of lowest primary main c.t. current to the highest one should not exceed 1:8.

FEATURES:

- Available current transformers versions with 2 to 8 primary windings.
- Nickel plated secondary terminals with +/- screws.
- Multiple mounting methods, including wall mounting, DIN rail 35mm.
- Terminal protection IP10.

GENERAL SPECIFICATION

Applicable standard:	IEC 61869-1/2
Case:	self-extinguishing plastic
Connection:	Two connection on each side. M4 screws with self lifting clamp strap.
Insulation class:	E (max 120°C)
Maximum system voltage:	0.72 kV
Operating frequency:	50/60 Hz
Test voltage:	3 kV, 50 Hz, 1 min
Rated primary rating:	$(2...8) \times 5A$
Rated secondary output:	5A
Rated burden:	5; 10; 15; 20; 25 VA
Accuracy class:	0.5; 1
Ambient temperature:	-25°C ... +40°C
Storage temperature:	-50°C ... +80°C
Thermal short circuit current (I_{th}):	$60 \times I_n$
Dynamic short circuit current (I_{dyn}):	$2.5 \times I_{th}$
Instrument security factor (FS):	5, 10

FEATURES:

720 V

Class
0.5
1

OUTPUTS:

5 A

LU01 - SUMMATION CURRENT TRANSFORMERS

	LU01 (75)
Depth	70 mm
Width	75 mm
Inputs	2 x 1 A...4 x 1 A or 2 x 5 A...4 x 5 A
Secondary current	1 A, 5 A
Accuracy class	0.5; 1

INPUTS:

2 x 1 A	2 x 5 A
...	...
4 x 1 A	4 x 5 A




OUTPUTS:

1 A	5 A
-----	-----




DIMENSIONS

LU01 (75)

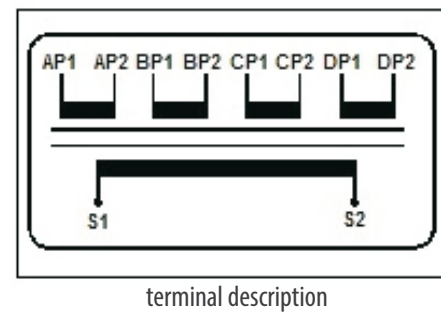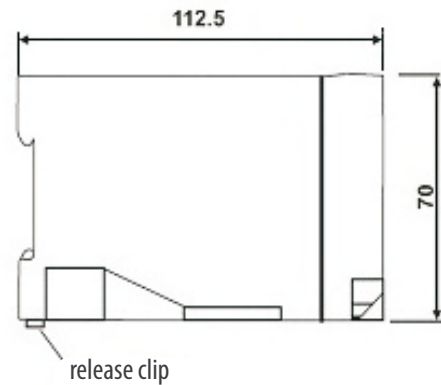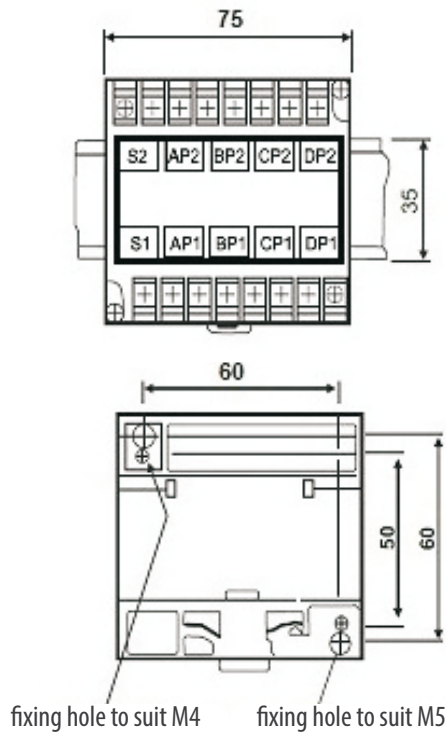

ORDERING CODES

Transformer type		LU01 (75)	
Accuracy class		0.5	1
Code		5	1
Code	Inputs	Transformer burden	
0255	2 x 5A	5 VA	5 VA
		10 VA	10 VA
		15 VA	15 VA
		-	20 VA
		-	25 VA
0211	2 x 1A	5 VA	5 VA
		10 VA	10 VA
		15 VA	15 VA
		-	-
		-	25 VA
0355	3 x 5A	5 VA	5 VA
		10 VA	10 VA
		15 VA	15 VA
		-	20 VA
		-	25 VA
0311	3 x 1A	-	5 VA
		10 VA	-
		15 VA	-
		-	-
		-	-
0455	4 x 5A	5 VA	5 VA
		10 VA	10 VA
		15 VA	15 VA
		-	20 VA
		-	25 VA
0411	4 x 1A	15 VA	-



Ordering example: Order code LU01 0255111L00000 means the summation transformer LU01 (75), INPUTS: 2x 5A, Class 1, 10 VA

3 YEAR WARRANTY

shop.lumel.com.pl



ePLAN

LU01 - SUMMATION CURRENT TRANSFORMERS



INPUTS:

5 x 1A
...
8 x 1A

5 x 5A
...
8 x 5A



OUTPUTS:

1 A
5 A

	LU01 (150)
Depth	70 mm
Width	150 mm
Inputs	5 x 1 A...8 x 1 A or 5 x 5 A...8 x 5 A
Secondary current	1 A, 5 A
Accuracy class	0.5; 1


DIMENSIONS

LU01 (150)

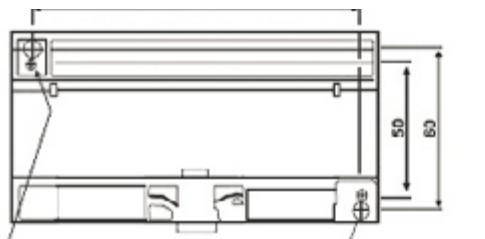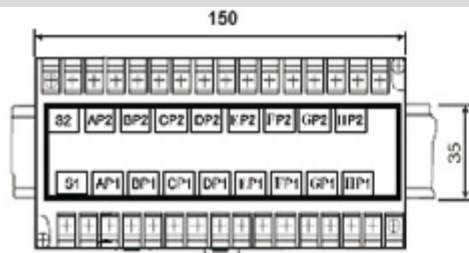


fixing hole to suit M4

fixing hole to suit M5

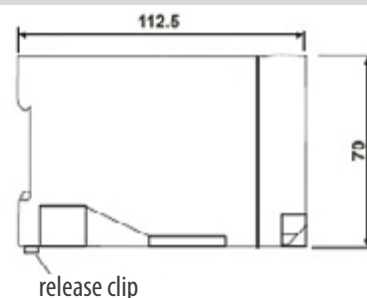

release clip

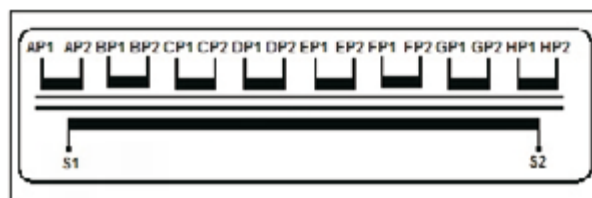

terminal description

ORDERING CODES

Transformer type		LU01 (150)	
Code	Inputs	Transformer burden	Code
0555	5 x 5A	5 VA	08
		10 VA	11
		15 VA	13
		-	14
		-	17
0511	5 x 1A	10 VA	11
		15 VA	13
		-	17
0655	6 x 5A	5 VA	08
		10 VA	11
		15 VA	13
		-	14
		-	17
0611	6 x 1A	5 VA	08
		10 VA	11
		15 VA	13
		-	17
0755	7 x 5A	5 VA	08
		10 VA	11
		15 VA	13
		-	14
		-	17
0711	7 x 1A	15 VA	13
		-	17
0855	8 x 5A	5 VA	08
		10 VA	11
		15 VA	13
		-	14
		-	17
0811	8 x 1A	15 VA	13



Ordering example: Order code LU01 0555111L00000 means the summation transformer LU01 (150), INPUTS: 5x 5A, Class 1, 10 VA

LW - ROUND CURRENT TRANSFORMERS

	LW01	LW02
Hole diameter	Ø 30 mm	Ø 30 mm
Depth	40 mm	50 mm
Outer diameter	Ø 73 mm	Ø 73 mm
Primary current	50 A...200 A	50 A...200 A
Secondary current	1 A, 5 A	
Accuracy class	0.5; 1	0.2; 0.5S; 0.5; 1

INPUT:

50 A
...
200 A

OUTPUTS:


5 A

1 A




DIMENSIONS

LW01

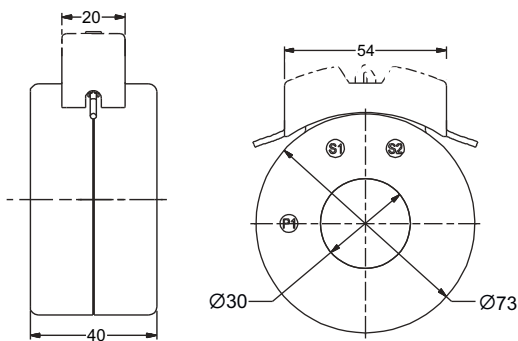

LW02

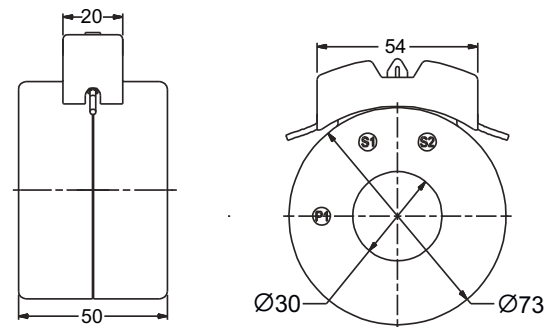

ORDERING CODES

Transformer type		LW01				LW02							
Accuracy class	0.5	1	0.2	0.5S	0.5	1							
Code	Rated primary current	Transformer burden											
13	50 A	-	-	1.5 VA	031	-	-	-	-	-	1.5 VA	031	
14	60 A	-	-	1.5 VA	031	-	-	-	-	-	1.5 VA	031	
16	75 A	-	-	1.5 VA	031	-	-	-	1.5 VA	035	2.5 VA	051	
18	100A	1.5 VA	035	2.5 VA	051	-	-	-	2.5 VA	055	5 VA	081	
19	120A	1.5 VA	035	2.5 VA	051	-	-	-	2.5 VA	055	5 VA	081	
20	125 A	2.5 VA	055	3.75 VA	071	-	-	-	2.5 VA	055	5 VA	081	
22	150 A	2.5 VA	055	5 VA	081	-	-	2.5 VA	056	5 VA	085	10 VA	111
24	200 A	5 VA	085	10 VA	111	2.5 VA	052	5 VA	086	10 VA	115	15 VA	131

LW

L000000

Transformer type	Code
LW01	01
LW02	02

Secondary current	Code
x/5A	5
x/1A	1

Ordering example: Order code LW 01185035L000000 means the transformer LW01 100/5A; Class 0,5; power 1.5VA

LW - ROUND CURRENT TRANSFORMERS



INPUT:

75 A
...
600 A

OUTPUTS:


5 A 1 A




	LW03	LW04
Hole diameter	Ø 43 mm	Ø 58 mm
Depth	41 mm	41 mm
Outer diameter	Ø 92 mm	Ø 100 mm
Primary current	75 A...300 A	120 A...600 A
Secondary current	1 A, 5 A	
Accuracy class	0.2; 0.5S; 0.5; 1	

DIMENSIONS

LW03

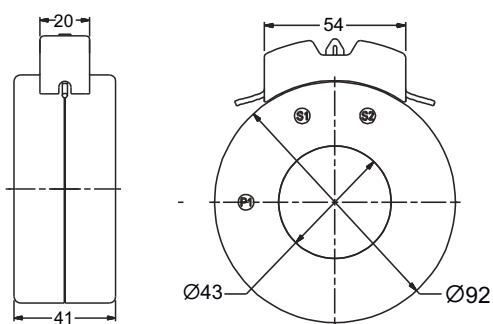

LW04

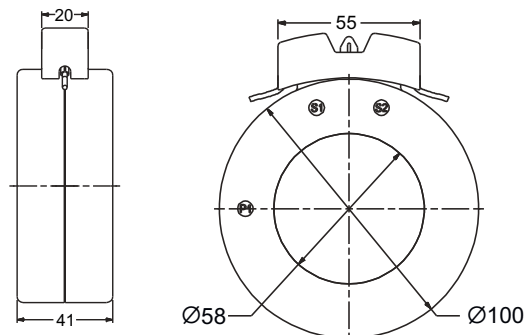

ORDERING CODES

Transformer type		LW03								LW04							
Accuracy class		0.2	0.5S	0.5	1	0.2	0.5S	0.5	1	0.2	0.5S	0.5	1	0.2	0.5S	0.5	1
Code	Rated primary current	Transformer burden															
16	75 A	-	-	-	-	-	-	1 VA	011	-	-	-	-	-	-	-	-
17	80 A	-	-	-	-	-	-	1.5 VA	031	-	-	-	-	-	-	-	-
18	100A	-	-	-	-	1 VA	015	2.5 VA	051	-	-	-	-	-	-	-	-
19	120A	-	-	-	-	1 VA	015	2.5 VA	051	-	-	-	-	-	-	1 VA	011
20	125 A	-	-	-	-	1 VA	015	2.5 VA	051	-	-	-	-	-	-	1.5 VA	031
22	150 A	-	-	-	-	1.5 VA	035	3.75 VA	071	-	-	-	-	1 VA	015	2.5 VA	051
24	200 A	1.5 VA	032	5 VA	086	5 VA	085	10 VA	111	-	-	1.5 VA	036	2.5 VA	055	5 VA	081
27	250 A	2.5 VA	052	7.5 VA	106	7.5 VA	105	15 VA	131	-	-	2.5 VA	056	3.75	075	7.5 VA	101
28	300 A	3.75 VA	072	10 VA	116	10 VA	115	20 VA	141	-	-	3.75 VA	076	5 VA	085	10 VA	111
31	400 A	-	-	-	-	-	-	-	-	5 VA	082	7.5 VA	106	10 VA	115	20 VA	141
32	500 A	-	-	-	-	-	-	-	-	7.5 VA	102	10 VA	116	15 VA	135	25 VA	201
33	600 A	-	-	-	-	-	-	-	-	10 VA	112	15 VA	136	15 VA	135	25 VA	201

Code

LW L000000

Transformer type	Code
LW03	03
LW04	04

Secondary current	Code
x/5A	5
x/1A	1

Ordering example: Order code LW 03185015L000000 means the transformer LW03 100/5A; Class 0.5; power 1VA

LW - ROUND CURRENT TRANSFORMERS

	LW05	LW06
Hole diameter	Ø 72 mm	Ø 113 mm
Depth	41 mm	40 mm
Outer diameter	Ø 110 mm	Ø 159 mm
Primary current	200 A...1000 A	600 A...3200 A
Secondary current	1 A, 5 A	
Accuracy class	0.2; 0.5S; 0.5; 1	

INPUT:

200 A
...
3200 A

OUTPUTS:


5 A

1 A




DIMENSIONS

LW05

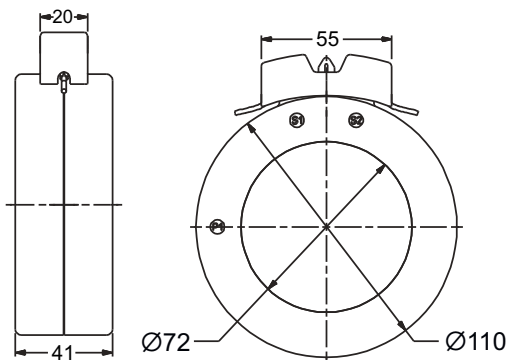

LW06

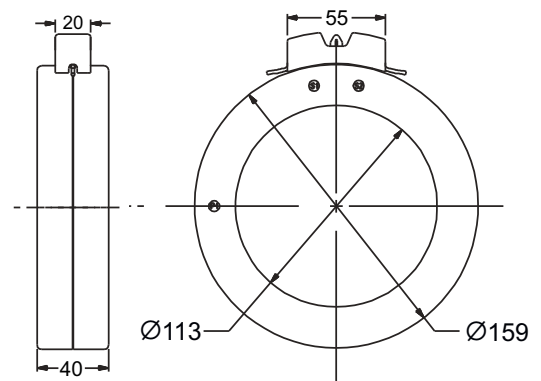

ORDERING CODES

Code	Rated primary current	LW05								LW06							
		Accuracy class				Transformer burden				Accuracy class				Transformer burden			
		0.2	0.5S	0.5	1	1.5 VA	2.5 VA	5 VA	10 VA	0.2	0.5S	0.5	1	1.5 VA	2.5 VA	5 VA	10 VA
24	200 A	-	-	-	-	031	-	-	-	-	-	-	-	-	-	-	-
27	250 A	-	-	-	-	035	051	-	-	-	-	-	-	-	-	-	-
28	300 A	-	-	-	-	055	081	-	-	-	-	-	-	-	-	-	-
31	400 A	2.5 VA	052	5 VA	086	7.5 VA	105	12.5 VA	121	-	-	-	-	-	-	-	-
32	500 A	3.75 VA	072	7.5 VA	106	10 VA	115	15 VA	131	-	-	-	-	-	-	-	-
33	600 A	5 VA	082	7.5 VA	106	10 VA	115	15 VA	131	1.5 VA	032	3.75 VA	076	5 VA	085	10 VA	111
37	800 A	10 VA	112	15 VA	136	15 VA	135	30 VA	151	2.5 VA	052	7.5 VA	106	10 VA	115	15 VA	131
39	1000 A	10 VA	112	15 VA	136	15 VA	135	30 VA	151	3.75 VA	072	7.5 VA	106	10 VA	115	15 VA	131
40	1200 A	-	-	-	-	-	-	-	-	15 VA	132	15 VA	136	20 VA	145	30 VA	151
41	1250 A	-	-	-	-	-	-	-	-	15 VA	132	15 VA	136	20 VA	145	30 VA	151
42	1500 A	-	-	-	-	-	-	-	-	15 VA	132	15 VA	136	20 VA	145	30 VA	151
43	1600 A	-	-	-	-	-	-	-	-	15 VA	132	15 VA	136	20 VA	145	30 VA	151
44	2000 A	-	-	-	-	-	-	-	-	15 VA	132	20 VA	146	25 VA	205	45 VA	161
46	2500 A	-	-	-	-	-	-	-	-	15 VA	132	20 VA	146	25 VA	205	45 VA	161
48	3000 A	-	-	-	-	-	-	-	-	15 VA	132	25 VA	206	30 VA	155	45 VA	161
49	3200 A	-	-	-	-	-	-	-	-	15 VA	132	25 VA	206	30 VA	155	45 VA	161

Code

LW 05 28 055 L000000

Transformer type	Code
LW05	05
LW06	06

Secondary current	Code
x/5A	5
x/1A	1

Ordering example: Order code LW 0528055L000000 means the transformer LW05 300/5A; Class 0.5; power 2.5VA

LE - ROUND CURRENT TRANSFORMERS



INPUT:

50 A
...
600 A

OUTPUTS:

5 A


1 A




	LE 73/30 (50)	LE 92/43 (41)	LE 95/50 (40)	LE 100/58 (41)
Hole diameter	Ø 30 mm	Ø 43 mm	Ø 50 mm	Ø 58 mm
Depth	50 mm	41 mm	40 mm	41 mm
Outer diameter	Ø 73 mm	Ø 92 mm	Ø 95 mm	Ø 100 mm
Primary current	50 A...200 A	200 A...400 A	200 A...300 A	400 A...600 A
Secondary current	1 A, 5 A			
Accuracy class	1; 5	1		

DIMENSIONS


LE 73/30 (50)




LE 92/43 (41)



LE 95/50 (40)



LE 100/58 (41)



ORDERING CODES

	Transformer type	LE 73/30 (50)						LE 92/43 (41)						LE 95/50 (40)						LE 100/58 (41)			
	Accuracy class	1			5			1						1						1			
Code	Rated primary current	Transformer burden																					
13	50 A	-	-	-	-	5 VA	087	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
14	60 A	-	-	-	-	5 VA	087	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
16	75 A	-	-	-	-	5 VA	087	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
18	100 A	5 VA	081	-	-	-		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
22	150 A	5 VA	081	-	-	-		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
24	200 A	5 VA	081	15	131	-		5 VA	081	10 VA	111	15 VA	131	5 VA	081	10 VA	111	15 VA	131	-	-	-	-
27	250 A	-		-		-		5 VA	081	10 VA	111	15 VA	131	5 VA	081	10 VA	111	15 VA	131	-	-	-	-
28	300 A	-		-		-		5 VA	081	10 VA	111	15 VA	131	5 VA	081	10 VA	111	15 VA	131	-	-	-	-
31	400 A	-		-		-		5 VA	081	-		15 VA	131	-		-		-		5 VA	081	15 VA	131
32	500 A	-		-		-		-		-		-		-		-		-		5 VA	081	15 VA	131
33	600 A	-		-		-		-		-		-		-		-		-		5 VA	081	15 VA	131

Code

LE [] [] [] [] [] [] L000000

Transformer type	Code
LE 73/30 (50)	01
LE 92/43 (41)	03
LE 95/50 (40)	04
LE 100/58 (41)	05

Secondary current	Code
x/5A	5
x/1A	1

Ordering example: Order code LE 01185081L000000 means the transformer LE 73/30(50) 100/5A; Class 1; power 5VA

LE - ROUND CURRENT TRANSFORMERS

	LE 110/72 (41)	LE 135/85 (30)	LE 159/113 (40)	LE 165/130 (30)
Hole diameter	Ø 72 mm	Ø 85 mm	Ø 113 mm	Ø 130 mm
Depth	41 mm	30 mm	40 mm	30 mm
Outer diameter	Ø 110 mm	Ø 135 mm	Ø 159 mm	Ø 165 mm
Primary current	800 A...1000 A	800 A...1200 A	1200 A...2000 A	2400 A...5000 A
Secondary current	1 A, 5 A			
Accuracy class	1			

INPUT:

800 A
...
5000 A

OUTPUTS:


5 A 1 A




3 YEAR WARRANTY

DIMENSIONS


LE 110/72 (41)




LE 135/85 (30)



LE 159/113 (40)



LE 165/130 (30)



ORDERING CODES

	Transformer type	LE 110/72 (41)				LE 135/85 (30)				LE 159/113 (40)		LE 165/130 (30)	
	Accuracy class	1				1				1		1	
Code	Rated primary current	Transformer burden											
37	800 A	5 VA	081	15 VA	131	5 VA	081	15 VA	131	-	-	-	-
39	1000 A	5 VA	081	15 VA	131	5 VA	081	15 VA	131	-	-	-	-
40	1200 A	-		-		-		15 VA	131	15 VA	131	-	-
42	1500 A	-		-		-		-		15 VA	131	-	-
43	1600 A	-		-		-		-		15 VA	131	-	-
44	2000 A	-		-		-		-		15 VA	131	-	-
45	2400 A	-		-		-		-		-		15 VA	131
46	2500 A	-		-		-		-		-		15 VA	131
48	3000 A	-		-		-		-		-		15 VA	131
51	4000 A	-		-		-		-		-		15 VA	131
52	5000 A	-		-		-		-		-		15 VA	131

Code


LE [] [] [] [] [] [] L000000

Transformer type	Code
LE 110/72 (41)	06
LE 135/85 (30)	07
LE 159/113 (41)	08
LE 165/130 (30)	09

Secondary current	Code
x/5A	5
x/1A	1

Ordering example: Order code LE 06395081L000000 means the transformer LE 110/72(41) 1000/5A; Class 1; power 5VA



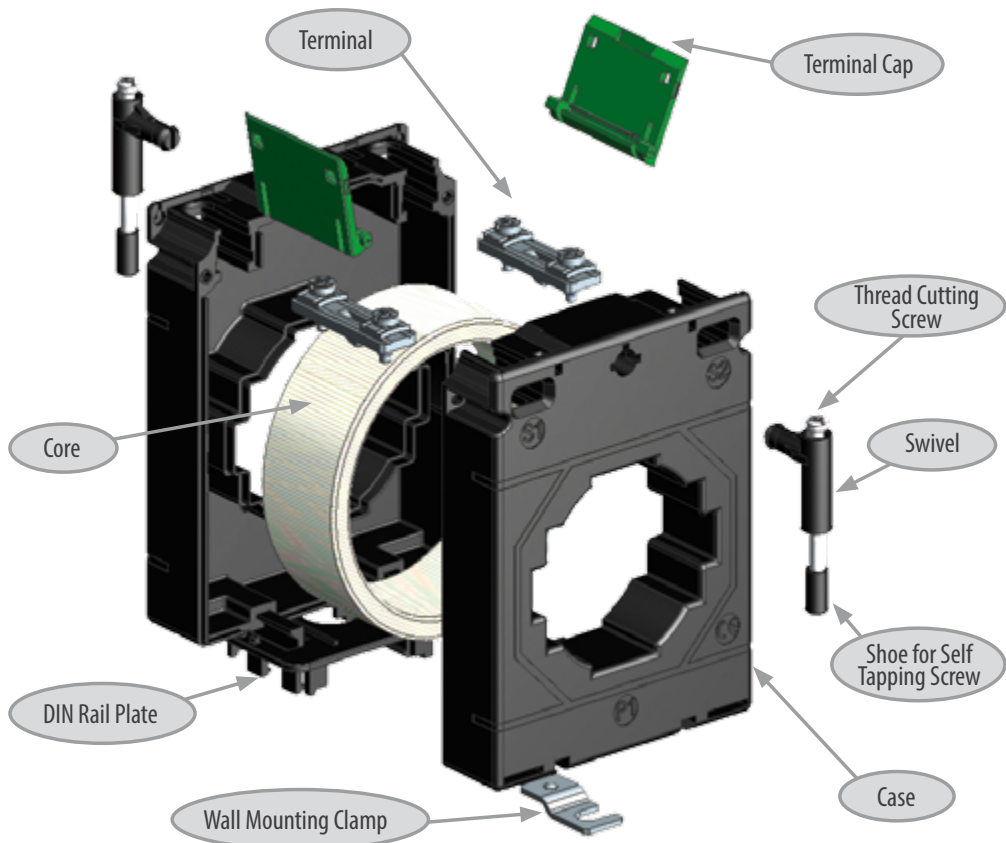

DIN rail mounting base:
(additional accessories - have to be order separatly)

Order code	Transformer type	View
LH000-0904-130-123	LCTR 50/xx (30) LCTB 50/xx (30)	
LH000-0904-130-002	LCTR 45, LCTB 45	
LH000-0904-130-124	LCTM LCTR 62, LCTB 62, LCTB 74, LCTB 86, LCTB 104, LCTP	
LH000-0904-130-128 (for vertical or horizontal mounting)	LCTM, LCTR 62, LCTB 62, LCTB 74, LCTB 86, LCTB 104, LCTP	

Accessories		
Description		View
Thread cutting screw 4 x 35mm		
Thread cutting screw 4 x 45mm		
Thread cutting screw 4 x 75mm		
Wall mounting clamp		
Swivel		
Shoe for self tapping M4 screw		
(only for transformers of LCTS type)	Nut of M4 screw	
	Locking pin	
	Thread cutting screw M4 x 45 mm	

Busbar mounting kit:

(delivered with each current transformer)

Kit order code	Description	No of pcs.	Transformer type
LH000-0904-130-140	Wall mounting clamp	2	LCTR 45, LCTB 45, LCTM 62W, LCTM 74W
LH000-0904-130-141	Thread cutting screw 4 x 35mm	2	LCTR 50, LCTB 50
	Wall mounting clamp	2	
	Swivel	2	
	Shoe for self tapping M4 screw	2	
LH000-0904-130-142	Thread cutting screw 4 x 45mm	2	LCTR 62, LCTB 62, LCTB 74, LCTB 86
	Wall mounting clamp	2	
	Swivel	2	
	Shoe for self tapping M4 screw	2	
LH000-0904-130-147	Thread cutting screw 4 x 35mm	6	LCTB 100/100 V, LCTB 100/130 V
	Wall mounting clamp	2	
	Shoe for self tapping M4 screw	6	
LH000-0904-130-143	Thread cutting screw 4 x 45mm	4	LCTB 104
	Wall mounting clamp	2	
	Swivel	4	
	Shoe for self tapping M4 screw	4	
LH000-0904-130-144	Thread cutting screw 4 x 75mm	4	LCTB 140/80, LCTB 140/100H, LCTB 140/100V
	Wall mounting clamp	2	
	Swivel	4	
	Shoe for self tapping M4 screw	4	
LH000-0904-130-145	Thread cutting screw 4 x 75mm	1	LCTB 140/130 V
	Thread cutting screw 4 x 45mm	5	
	Wall mounting clamp	2	
	Shoe for self tapping M4 screw	6	
LH000-0904-130-146	Thread cutting screw 4 x 75mm	6	LCTB 225
	Wall mounting clamp	2	
	Shoe for self tapping M4 screw	6	
LH000-0904-130-623	Thread cutting screw M4 x 45mm	4	LCTS 93/30SC
	Wall mounting clamp	2	
	Shoe for self tapping M4 screw	4	
	Locking pin	1	
	Nut of M4 screw	4	
LH000-0904-130-624	Thread cutting screw M4 x 45 mm	6	LCTS 125/50SC
	Wall mounting clamp	2	
	Shoe for self tapping M4 screw	6	
	Locking pin	1	
	Nut of M4 screw	6	
LH000-0904-130-625	Thread cutting screw M4 x 45 mm	8	LCTS 155/80SC
	Wall mounting clamp	2	
	Shoe for self tapping M4 screw	8	
	Locking pin	1	
	Nut of M4 screw	8	

3 YEAR
WARRANTY

shop.lumel.com.pl



ePLAN



LUMEL has been known, since 1954, all over the world, as a manufacturer of top quality industrial automation devices. In 2020, international reports listed Lumel as one of the world's leaders in the production of electrical quantity transducers, network parameter analyzers and analog meters.

Lumel offers consists of product categories, such as:

- ▶ Network parameter meters and analyzers
- ▶ Electrical and non-electrical quantity transducers
- ▶ Digital meters
- ▶ Recorders and data loggers
- ▶ Controllers
- ▶ Analog meters
- ▶ Current transformers
- ▶ Shunts

Depending on the needs of the customer, the automation products and systems our offer relay on various data communication protocols (MODBUS, ETHERNET, PROFINET, BACNET or MQTT).

Apart from the products, Lumel specializes in complex systems used for:

- ▶ monitoring and optimizing the cost of electricity and other utilities (water, gas, compressed air)
- ▶ monitoring environmental parameters: temperature, humidity, light intensity, CO₂, volatile gases
- ▶ solar energy

In addition to its manufacturing activity, Lumel offers also:

- ▶ OEM services in the scope of housing designing, electronics, mechanics, hardware and software. All under one roof.
- ▶ EMS services
- ▶ ODM services

We are a member of an international capital group which consists of the following companies: LUMEL S.A., LUMEL ALUCAST Sp. z o.o., Rishabh Instruments Pvt. Ltd., Sifam Tinsley US, Sifam Tinsley UK.

APRIL 2023

LUMEL S.A.

ul. Ślubicka 4
65-127 Zielona Góra, Poland
tel.: 68 45 75 100,
fax. 68 45 75 508
www.lumel.com.pl

EXPORT DEPARTMENT:

☎ + 48 68 45 75 130 or + 48 693 290 962
✉ export@lumel.com.pl

CUSTOMER SERVICE:

☎ + 48 68 45 75 151
☎ + 48 68 45 75 152
☎ + 48 68 45 75 153
☎ + 48 68 45 75 154