


5-MCF-H 08


valve type with pilot valve

coaxial valve

type MCF-H 08



2/2 way valve externally controlled
pressure range PN 0-160 bar
orifice DN 8 mm
connection thread
function valve
 normally closed
 symbol **NC**
 valve
 normally open
 symbol **NO**



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

design pressure balanced, with spring return
body materials ① brass ②
 ③ ⑤
 ④ ⑥
valve seat synthetic resin on metal
seal materials NBR, FPM, PTFE

details needed for main valve

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- type of actuation

details needed for pneumatic actuation

- nominal voltage
- type of protection
- actuation pressure range min/max
- low wattage coil, actuation pressure range 4-7 bar
- pilot valve type

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

general specifications**options**

ports	MCF-H	threads G 3/8	
function	NC		NO
pressure range	bar	0-160	
Kv value	m³/h	1,2	
vacuum			< 10 ⁻⁶ mbar·l·s ⁻¹
pressure-vacuum	P ₁ ⇌ P ₂		pressure side max. 160 bar vacuum side leak rate upon request
back pressure	P ₂ > P ₁		available (max. 16 bar)
media	emulsions - oils - neutral gases		other medias upon request
abrasive media			
damping	opening		
	closing	by throttles on pilot valve	
flow direction	A ⇌ B	as marked	
switching cycles	1/min	600	
switching time	ms	opening 30-3000 closing 30-3000	
media temperature	°C	direct mounted pilot valve 60	> 60 °C upon request
ambient temperature	°C	direct mounted pilot valve 50	> 50 °C upon request
flush ports			
leak ports			
limit switches			temperature range max 70 °C
manual override		via pilot valve	
approvals			
mounting			mounting brackets
weight	kg	1,6	
additional equipment			

electrical specifications**options**

nominal voltage	U _n	DC 24 V	special voltage upon request
	U _n	AC 230 V 50 Hz	special voltage upon request
power consumption	DC	4,8 W	2,5 W
	AC	pick up 11,0 VA holding 8,5 VA	
protection	IP65 (P54)	acc. DIN 40050	
energized duty rating	ED	100%	
connection		plug acc. DIN EN 175301-803 form B, 4 positions x90° / wire diameter 6-8 mm	
optional	M12x1	connector acc. DESINA	connector acc. VDMA
additional equipment		illuminated plug with varistor	
max. temperature	media	60 °C	
	ambient	50 °C	
explosion proof	E Ex e II T5	nominal voltage U _n	DC 24 V 3,25 W
		power consumption	AC 230 V 50 Hz 2,90 W

pneumatic specifications**options**

actuation pressure range	bar	4-10	3-10 upon request
air consumption	cm³/stroke	4,5	
cycle speed		main valve speed variable by throttles on pilot valve	
control		preferably 5/2 way pilot valve	
pilot valve interface		NAMUR acc. VDI / VDE 3845	ISO 1 acc. DIN 5599/1
actuator ports	2/4	G 1/8	


hydraulic specifications**options**

actuation pressure range			
control			
actuator ports			
by media			

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional


type **MCF-H 08**

function: **NC**
closed when not energized

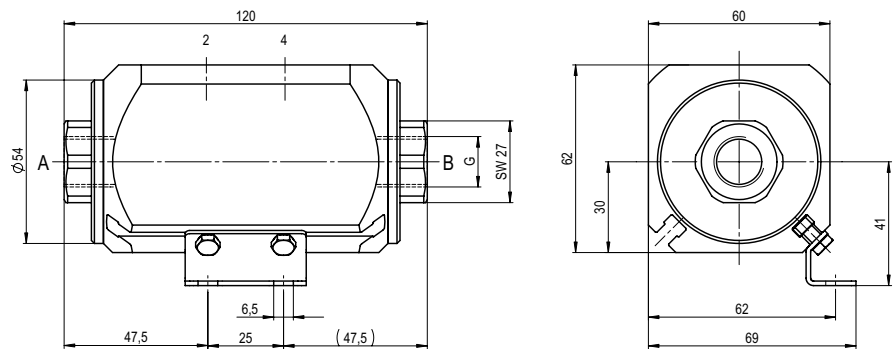


type **MCF-H 08**

function: **NO**
open when not energized

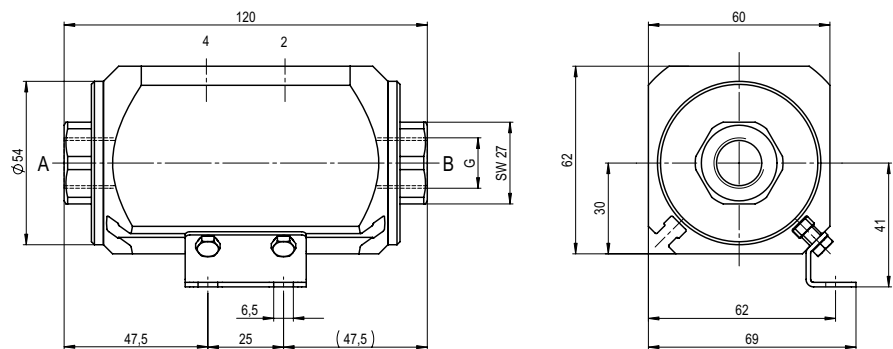

pneumatic actuation



5/2 way pilot valve
flow rate 700 l/min
pressure range 3-10 bar G 1/8



5/2 way pilot valve ISO 1
flow rate 700 l/min
pressure range 3-10 bar G 1/4