

# DMK 331P

## Industrial Pressure Transmitter

Pressure Ports With Flush Welded Stainless Steel Diaphragm

accuracy according to IEC 60770:  
0.5 % FSO



### Nominal pressure

from 0 ... 60 bar up to 0 ... 400 bar

### Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

others on request

### Special characteristics

- ▶ suited for viscous and pasty media



### Optional versions

- ▶ IS-version  
Ex ia = intrinsically safe for gases and dusts
- ▶ SIL 2  
according to IEC 61508 / IEC 61511
- ▶ food compatible filling fluid with FDA approval
- ▶ cooling element for media temperatures up to 300 °C
- ▶ customer specific versions


The pressure transmitter DMK 331P is suitable for measuring the pressure of viscous and pasty media, where a totally flush pressure port is required.

As on all industrial pressure transmitters made by BD|SENSORS, you may choose between various electrical and mechanical connections also on DMK 331P.

### Preferred areas of use are

-  Plant and Machine Engineering
-  Food Industry

### Preferred used for

-  Viscous and Pasty Media



Input pressure range					
Nominal pressure gauge/abs. [bar]	60	100	160	250	400
Overpressure [bar]	100	200	400	400	600
Burst pressure $\geq$ [bar]	180	300	500	750	1000
Output signal / Supply					
Standard	2-wire:	4 ... 20 mA / $V_S = 8 \dots 32 V_{DC}$	SIL-version: $V_S = 14 \dots 28 V_{DC}$		
Option IS-protection	2-wire:	4 ... 20 mA / $V_S = 10 \dots 28 V_{DC}$	SIL-version: $V_S = 14 \dots 28 V_{DC}$		
Options 3-wire	3-wire:	0 ... 20 mA / $V_S = 14 \dots 30 V_{DC}$ 0 ... 10 V / $V_S = 14 \dots 30 V_{DC}$			
Performance					
Accuracy <sup>1</sup>	$\leq \pm 0.5 \% \text{ FSO}$				
Permissible load	current 2-wire:	$R_{\max} = [(V_S - V_{S \min}) / 0.02 \text{ A}] \Omega$			
	current 3-wire:	$R_{\max} = 500 \Omega$			
	voltage 3-wire:	$R_{\min} = 10 \text{ k}\Omega$			
Influence effects	supply:	0.05 % FSO / 10 V			
	load:	0.05 % FSO / $\text{k}\Omega$			
Long term stability	$\leq \pm 0.3 \% \text{ FSO} / \text{year}$ at reference conditions				
Response time	2-wire:	$\leq 10 \text{ msec}$			
	3-wire:	$\leq 3 \text{ msec}$			
<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)					
Thermal effects (Offset and Span) <sup>2</sup> / Permissible temperatures					
Thermal error	$\leq \pm 0.2 \% \text{ FSO} / 10 \text{ K}$				
in compensated range	-20 ... 85°C				
Permissible temperatures <sup>3</sup>	medium:	-40 ... 125 °C for filling fluid silicone oil -10 ... 125 °C for filling fluid food compatible oil			
	electronics / environment:	-40 ... 85 °C			
	storage:	-40 ... 100 °C			
Permissible temperature medium for cooling element 300°C	filling fluid silicone oil	overpressure: -40 ... 300 °C	vacuum: -40 ... 150 °C		
	filling fluid food compatible oil	overpressure: -10 ... 250 °C	vacuum: -10 ... 150 °C		
<sup>2</sup> an optional cooling element can influence thermal effects for offset and span depending on installation position and filling conditions.					
<sup>3</sup> max. temperature of the medium for overpressure > 0 bar: 150 °C for 60 minutes with a max. environmental temperature of 50 °C					
Electrical protection					
Short-circuit protection	permanent				
Reverse polarity protection	no damage, but also no function				
Electromagnetic compatibility	emission and immunity according to EN 61326				
Mechanical stability					
Vibration	20 g RMS (25 ... 2000 Hz)	according to DIN EN 60068-2-6			
Shock	500 g / 1 msec	according to DIN EN 60068-2-27			
Filling fluids					
Standard	silicone oil				
Options	food compatible oil (with FDA approval) (Mobil SHC Cibus 32; Category Code: H1; NSF Registration No.: 141500) others on request				
Materials					
Pressure port	stainless steel 1.4435 (316 L)				
Housing	stainless steel 1.4404 (316 L)				
Option compact field housing	stainless steel 1.4305 (303) with cable gland brass, nickel plated				others on request
Seals (media wetted)	standard: FKM (recommended for medium temperatures $\leq 200 \text{ }^\circ\text{C}$ ) option: FFKM <sup>4</sup> (recommended for medium temperatures > 200 °C) others on request				
Diaphragm	stainless steel 1.4435 (316 L)				
Media wetted parts	pressure port, seals, diaphragm				
<sup>4</sup> for pressure ranges $P_N \leq 100 \text{ bar}$					
Explosion protection (only for 4 ... 20 mA / 2-wire)					
Approvals DX19-DMK 331P	<b>IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X</b> zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T 85°C Da				
Safety technical maximum values	$U_i = 28 \text{ V}$ , $I_i = 93 \text{ mA}$ , $P_i = 660 \text{ mW}$ , $C_i \approx 0 \text{ nF}$ , $L_i \approx 0 \text{ }\mu\text{H}$ , the supply connections have an inner capacity of max. 27 nF to the housing				
Permissible temperatures for environment	in zone 0:	-20 ... 60 °C with $p_{\text{atm}}$ 0.8 bar up to 1.1 bar			
	in zone 1 or higher:	-20 ... 70 °C			
Connecting cables (by factory)	cable capacitance:	signal line/shield also signal line/signal line: 160 pF/m			
	cable inductance:	signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$			


Miscellaneous	
Option SIL 2 <sup>5</sup>	according to IEC 61508 / IEC 61511
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA
Weight	min. 200 g (depending on process connection)
Installation position	any (standard calibration in a vertical position with the pressure port connection down)
Operational life	> 100 x 10 <sup>6</sup> pressure cycles
CE-conformity	EMC Directive: 2014/30/EU      Pressure Equipment Directive: 2014/68/EU (module A) <sup>6</sup>
ATEX Directive	2014/34/EU

<sup>5</sup> only for 4 ... 20 mA / 2-wire


<sup>6</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar

### Wiring diagrams

2-wire-system (current)



3-wire-system (current / voltage)


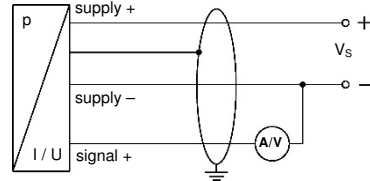


### Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	field housing	cable colour (IEC 60757)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal + (only for 3-wire)	3	1	3	OUT +	gn (green)
Shield	ground pin	5	4	!	gnye (green-yellow)



### Electrical connection (dimensions in mm)

standard





ISO 4400 (IP 65)


option




Binder Series 723 5-pin (IP 67)



M12x1 4-pin (IP 67)



compact field housing (IP 67)



cable outlet with PVC cable (IP 67)<sup>7</sup>

⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

<sup>7</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)


# DMK 331P

Industrial Pressure Transmitter

Technical Data


## Mechanical connection (dimensions in mm)

### standard

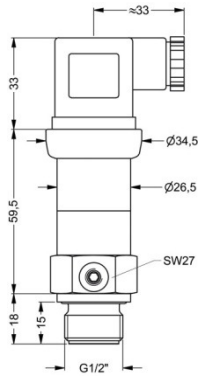


G1/2" flush DIN 3852


### option

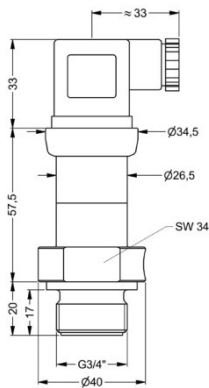


G3/4" flush DIN 3852

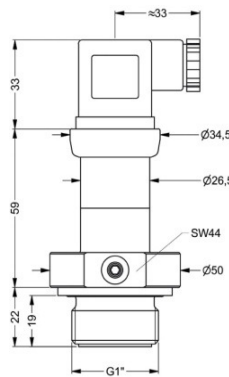

G1" flush DIN 3852

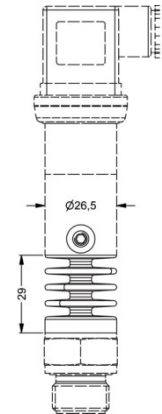

cooling element  
300 °C<sup>8</sup>

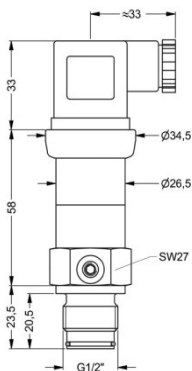

G1/2" flush  
with radial o-ring

- ⇒ SIL- and SIL-Ex version: total length increases by 26.5 mm!
- ⇒ metric threads and other versions on request

<sup>8</sup> possible for nominal pressure ranges  $P_N \leq 160$  bar

© 2017 BD/SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

## Ordering code DMK 331P

DMK 331P

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

<b>Pressure</b>																					
	gauge	5	0	5																	
	absolute	5	0	6																	
<b>Input</b>																					
	[bar]																				
	60	6	0	0	2																
	100	1	0	0	3																
	160	1	6	0	3																
	250	2	5	0	3																
	400	4	0	0	3																
	customer	9	9	9	9															consult	
<b>Output</b>																					
	4 ... 20 mA / 2-wire																				1
	0 ... 20 mA / 3-wire																				2
	0 ... 10 V / 3-wire																				3
	Intrinsic safety 4 ... 20 mA / 2-wire																				E
	SIL2 4 ... 20 mA / 2-wire																				1S
	SIL2 with Intrinsic safety																				ES
	4 ... 20 mA / 2-wire																				ES
	customer																				9
																					consult
<b>Accuracy</b>																					
	0.5 %																				5
	customer																				9
																					consult
<b>Electrical connection</b>																					
	Male and female plug ISO 4400																				1 0 0
	Male plug Binder series 723 (5-pin)																				2 0 0
	Cable outlet with PVC-cable <sup>1</sup>																				T A 0
	Male plug M12x1 (4-pin) / metal																				M 1 0
	compact field housing																				8 5 0
	stainless steel 1.4305																				8 5 0
	customer																				9 9 9
																					consult
<b>Mechanical connection</b>																					
	G1/2" DIN 3852 with flush diaphragm																				Z 0 0
	G3/4" DIN 3852 with flush diaphragm																				Z 3 0
	G1" DIN 3852 with flush diaphragm																				Z 3 1
	G 1/2" DIN 3852 with rad. o-ring and flush diaphragm																				Z 6 1
	customer																				9 9 9
																					consult
<b>Diaphragm</b>																					
	Stainless steel 1.4435 (316L)																				1
	customer																				9
																					consult
<b>Seals</b>																					
	FKM																				1
	FFKM <sup>2</sup>																				7
	customer																				9
																					consult
<b>Filling Fluids</b>																					
	Silicone oil																				1
	food compatible oil																				2
	customer																				9
																					consult
<b>Special version</b>																					
	standard																				0 0 0
	with cooling element up to 300°C <sup>3</sup>																				2 0 0
	customer																				9 9 9
																					consult

<sup>1</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)

<sup>2</sup> only for P<sub>N</sub> ≤ 100 bar possible

<sup>3</sup> only for P<sub>N</sub> ≤ 160 bar possible

