


700

Pressotermostato Thermo-pressure switch

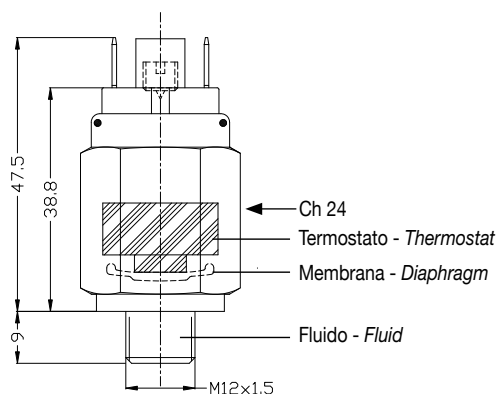

Il **Presso-termostato** è costituito da un **Pressostato** a membrana a taratura regolabile, con contatto elettrico N.A. oppure N.C., che integra un **Termostato** bimetallico a taratura fissa con il contatto, N.A. oppure N.C., collegato a quello del pressostato.

I contatti sono collegati in parallelo se sono N.C., in serie se sono N.A. Si tratta quindi di un dispositivo atto a rilevare, in sostanziale concomitanza, sia lo stato della **Temperatura** sia quello della **Pressione** di un fluido in relazione a dei valori predeterminati.

Progettato per l'impiego in circuiti fluidodinamici di vario genere e nei filtri idraulici è in grado di evitare le false segnalazioni d'allarme tipiche delle fasi di avviamento a basse temperature

Corpo	Ottone
Contatti elettrici	Argento AgNi
Max tensione commutabile	48 Vac - a richiesta 250 Vac
Max corrente commutabile	0,5 (0,2) A
Max temperatura del fluido	100°C
Vita meccanica	10 ⁵ (1-10 bar)
Vita elettrica	10 ⁵
Tipo di azionamento	1B
Coppia max di serraggio	30 Nm
Grado di protezione	IP00
con cappuccio 3015001	IP54 (vedi pagg. 13-15)
con cappuccio 3900001	IP65 (vedi pagg. 13-15)
con connettore 3900200	IP65 (vedi pagg. 13-15)
con cavo resinato	IP67 (vedi pagg. 13-15)
Filettatura	M12x1,5 (contattare Euroswitch per altri fissaggi)
PRESSOSTATO N.A. (BORDEAUX) N.C. (BLU)	
Pressione di intervento	Tarato in Euroswitch 1-10 bar
Max pressione di sicurezza	30 bar
Membrana	HNBR (contattare Euroswitch per altri materiali)
TERMOSTATO N.A. / N.C.	
Temperatura di intervento	30° C +/- 5K differenziale 10/15 K
Velocità variazione temp.	1/2 K/min
Peso	~ 75 gr

- Brevetto Europeo
European Patent
- Brevetto americano No. 8,087,592
U.S. Patent No. 8,087,592



Model P700 is comprised of an adjustable diaphragm **pressure switch**, with NO or NC contacts, and a built-in fixed-setting bimetal **thermostat**, the contact of which is linked to that of the pressure switch. NC contacts are connected in parallel, NO contacts in series.

The device is designed to measure, virtually simultaneously, the **temperature** and **pressure** of a fluid in relation to set values.

It is intended for use in hydraulic circuits of various kinds, and in hydraulic filters it avoids the false alarms typical of low-temperature start-up.

Case	Brass
Electrical contacts	Silver AgNi
Max switches voltage	48 Vac - 250 Vac on request
Max switches current	0,5 (0,2) A
Max fluid temperature	100°C
Mechanical working life	10 ⁵ (1-10 bar)
Electrical working life	10 ⁵
Action type	1B
Tightening torque max	30 Nm
Protection degree	IP00
with cover 3015001	IP54 (see pages 13-15)
with cap 3900001	IP65 (see pages 13-15)
with connector 3900200	IP65 (see pages 13-15)
with cable sealed by resin	IP67 (see pages 13-15)
Thread	M12x1,5 (contact Euroswitch for other thread)
NO (BORDEAUX) / NC (BLUE) PRESSURE SWITCHES	
Switching pressure	Setting in Euroswitch 1-10 bar
Max overpressure limit	30 bar
Diaphragm	HNBR (contact Euroswitch for other material)
NO / NC TEMPERATURE SWITCHES	
Switching temperature :	30° C +/- 5K differential 10/15 K
Temperature change rate :	1/2 K/min
Weight	~ 75 gr

Per un corretto impiego vedere le note generali del catalogo pressostati Euroswitch edizione 2014.

For a correct use please refer to "General Notes" in the pressure switches Euroswitch catalogue, edition 2014.