


TIP450E



Thermal Imaging and Profiling System for Wallboard Applications



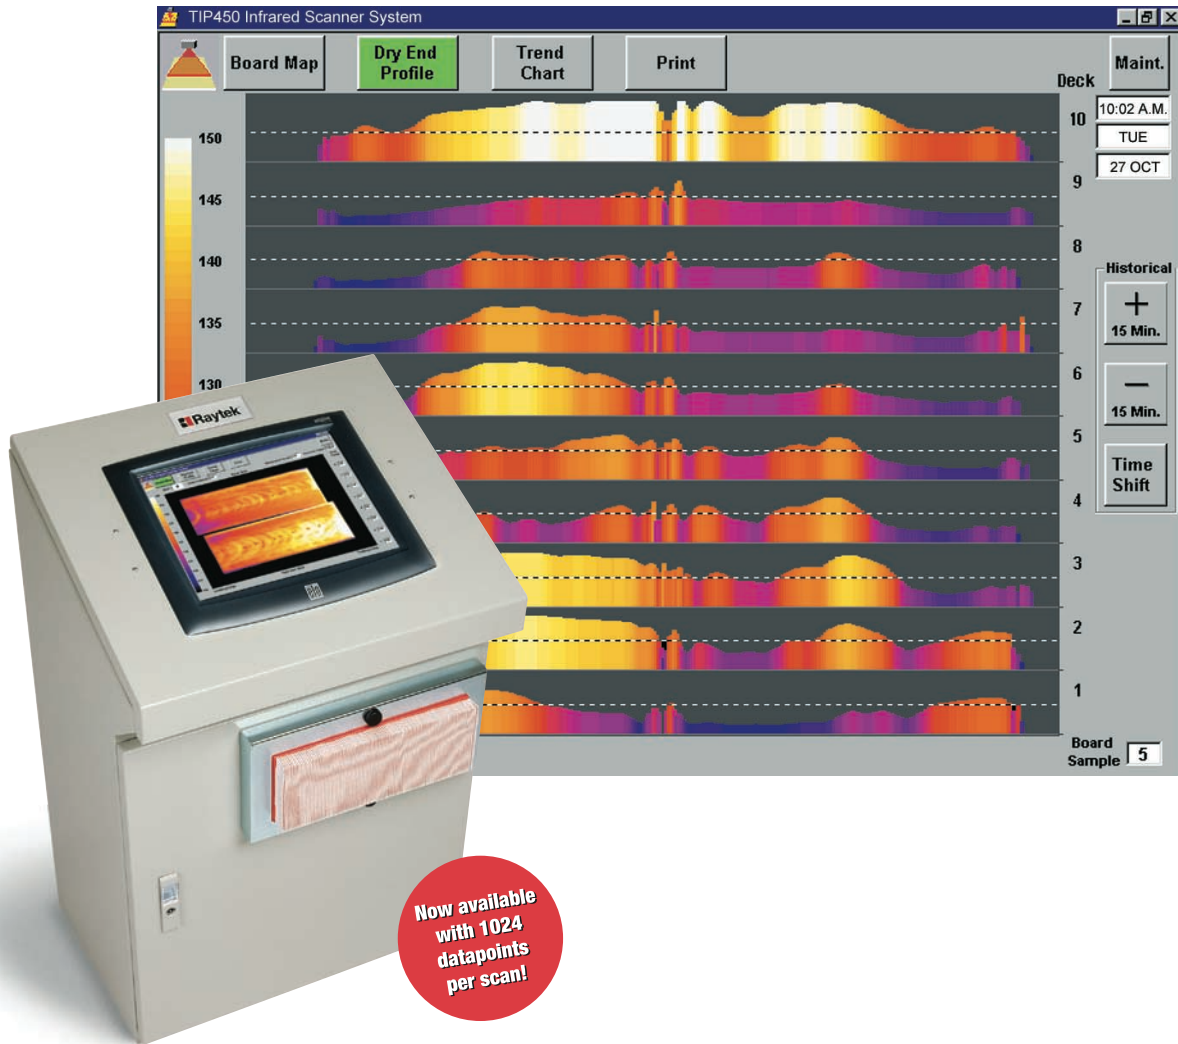


Accurate, Reliable Kiln Balance Surveys


- Fuel Savings
- Quality Improvements
- Increased Production
- Fast Dryer Setup
- Labor Reduction

Detailed, Continuous Board Quality Monitoring


- Real-time Board Quality Monitoring
- Defect Detection
- Reject Board Detection
- Simplified Dryer Process Monitoring and Control
- Quick Dryer Operator Training
- On board Ethernet TCP/IP Communication
- Built-in line laser sighting

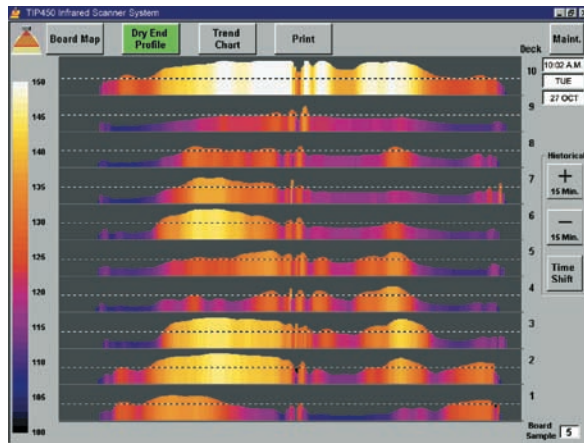

BEFORE: An actual *dryer profile image* running 1/2" (12mm) board before the dryer was balanced with the TIP450E. This screen clearly shows the top deck is burned (lighter), while wet streaks (darker) occur on other decks.

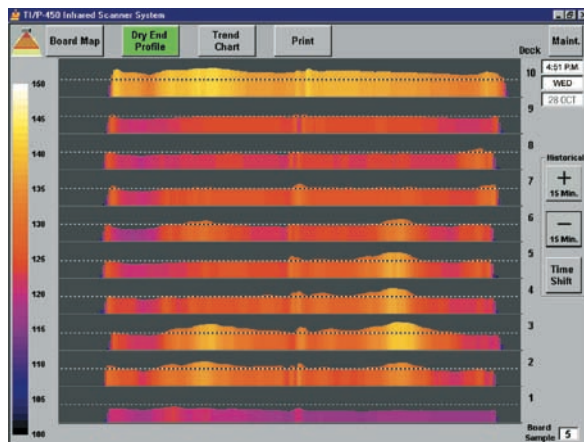

AFTER: The same dryer running the same product after adjustments to the decks using TIP450E data. This optimization saved 5% on fuel usage and gained 6% on line speed.

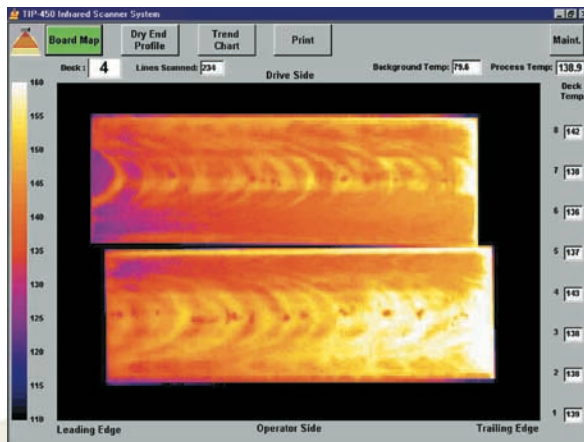

Real-time board map displays a thermal image of each board as it leaves the dryer, providing comprehensive board quality information.



Real-time and historical trend charts offer a precise view of the board dryness over time.

The TIP450E System

The TIP450E system is comprised of 4 main components:

- A** Main console cabinet
- B** MP150 infrared process imager
- C** Remote I/O assembly
- D** Fixed infrared sensor assembly



The main console cabinet houses the software, PC, touch-screen monitor, power supply, data acquisition electronics, and field wiring terminals. This console should be located where the dryer operator can easily view it and make dryer process changes.

The infrared process imager is mounted into a small enclosure with a scan port in the bottom. The enclosure is located over the conveyor section just past the outfeed cascade rolls.

The remote I/O assembly is used to monitor the drop gate signals at the dryer outfeed section. This small DIN rail mounted assembly is designed to be located inside the existing drop gate I/O cabinet.

The fixed infrared sensor assembly is used to monitor the board temperatures right at the dryer exit. This information is used in the software to compensate for ambient air temperature variations. The infrared sensor is mounted inside a heavy duty telescoping mechanical arm.




Infrared Linescanner

The highly accurate MP150 Linescanner monitors the smallest changes to the board making and drying processes.

The imager scans the boards up to 150 times a second with up to 1024 individual temperatures taken on each scan. This results in 40,000 temperature points measured every second.

This data is used to create board thermal maps, dryer profile images, and historical trend charts.

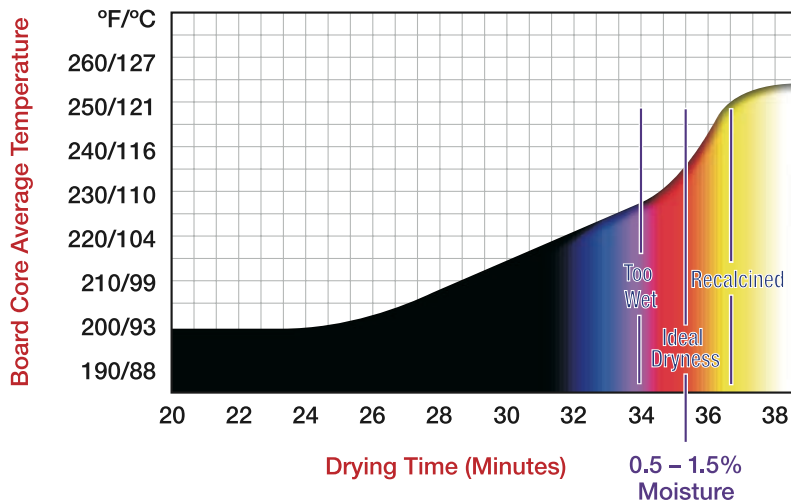

The temperature of the board changes as the drying progresses. Scanning the board temperature with the TIP450E has proven to be the most accurate means of indicating the dryness of the board.

System Electrical Specifications

Power Input	120VAC/60Hz or 240VAC/50Hz
Power Consumption	5A @ 120VAC or 2.5A @ 240VAC
Signal Inputs at RIO from Drop Gates	120VAC, 240VAC, or 24VDC (sourced)
Signal Input from Outfeed Conveyor	120VAC, 240VAC, or 24VDC (sourced)
Signal Outputs for Alarms	120VAC, 240VAC, or 24VDC

MP150 Linescanner Specifications

Scan Speed	up to 150Hz
Scanning Resolution	256 points @ 150Hz 512 points @ 80Hz 1024 points @ 40Hz
Temperature Range	20 to 350°C (68 to 662°F)
IR Spectral Response	3 to 5 microns
Scan Angle/Field of View	90 degrees
Accuracy	+/- 2% of measured value or +/- 2° C (4°F) whichever is greater
Repeatability	+/- 1% of measured value or +/- 1° C (2°F)
Focus	1.52m (60in)
Emissivity	0.1 to 1.0 digitally adjusted
Optical Resolution	150:1 @ 90% energy or 450:1 @ 50% energy
Input Voltage	24VDC (provided from power supply in main console)
Environmental Housing	Installed in ported Rittal® enclosure with fan and filter
Scan Motor MTBF	40,000 hours

Main Console Specifications

Enclosure	Rittal® operator console with 30 degree slanted top 72 cm x 91.2 cm x 57.6 cm (30 in x 38 in x 24 in)
Environmental Rating	NEMA-12 (IP55) 512
PC	Dell® mini tower, 128MB RAM, 4GB HDD, CD ROM
Operating System	Windows XP®
Monitor	Industrial 15 in monitor LCD with acoustic wave touchscreen and 1/4 in (0.64 cm) plate glass. Flush mounted in lid of console.
Cooling/Ventilation	Fan and filter



The Worldwide Leader in Noncontact Temperature Measurement

Raytek Corporation

Worldwide Headquarters

Santa Cruz, CA USA

Tel: 1 800 227 8074 (USA and Canada, only)

1 831 458 1110

solutions@raytek.com

European Headquarters

Berlin, Germany

Tel: 49 30 4 78 00 80

raytek@raytek.de

France

Tel: 0800 888 244

info@raytek.fr

United Kingdom

Tel: +44 1908 630 800

ukinfo@raytek.com

China Headquarters

Beijing, China

Tel: 8610 6438 4691

info@raytek.com.cn

To find a Raytek office near you, please visit www.raytek.com

Worldwide Service

Raytek offers services, including repair and calibration.

For more information, contact your local office or e-mail: support@raytek.com

www.raytek.com



Raytek is an ISO 9001 certified company

© 2008 Raytek Corporation (3111478 Rev. F) 11/2008
Raytek and the Raytek logo are registered trademarks of Raytek Corporation.
Rittal is a registered trademark of Rittal Corp. Windows is a registered trademark of Microsoft Corp. Dell is a registered trademark of Dell Corp.
Specifications subject to change without notice.