



## coaxial valve

 type **MK 15**  
**FK 15**


2/2 way valve  
 pressure range PN 0-100 bar  
 orifice DN 15 mm  
 connection thread/flange  
 function valve  
 normally closed  
 symbol **NC**  
 valve  
 normally open  
 symbol **NO**



 Above stated body materials refer to the valve port connections that get in contact with the media only!

**design** pressure balanced, with spring return  
**body materials** ① brass ② steel, galvanized  
 ③ brass, nickel plated ⑤ without non-ferr. metals  
 ④ steel, nickel plated ⑥ stainless steel  
**valve seat** synthetic resin on metal  
**seal materials** NBR PTFE, FPM, CR, EPDM

## details needed


- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage


## general specifications

ports	MK threads G 3/8 - G 3/4	options special threads
	FK flanges PN 16 / 40 / 100	special flanges
function	NC	NO
pressure range	bar 0-16 / 0-40 / 0-64 / 0-100	> 100 bar upon request
Kv value	m³/h 4,8	100 bar = 2,5
vacuum	leak rate	< 10 <sup>-6</sup> mbar·l·s <sup>-1</sup>
pressure-vacuum	P <sub>1</sub> ⇌ P <sub>2</sub>	upon request
back pressure	P <sub>2</sub> > P <sub>1</sub>	available (max. 16 bar)
media	gaseous - liquid - highly viscous - gelatinous - contaminated	
abrasive media		upon request
damping	opening	
	closing	available
flow direction	A ⇌ B as marked	bi-directional (max. 16 bar)
switching cycles	1/min 200	
switching time	ms opening 80 closing 80	
media temperature	°C DC: -20 to +100	-40 to +160
	AC: -20 to +100	-40 to +160
ambient temperature	°C DC: -20 to +80	
	AC: -20 to +80	
limit switches		inductive / mech. (depend. on temperature)
manual override		available
approvals		LR/GL/WAZ
mounting		mounting brackets
weight	kg MK 3,8 FK 5,0	
additional equipment		upon request

## electrical specifications

nominal voltage	U <sub>n</sub> DC 24 V	options special voltage upon request
	U <sub>n</sub> AC 230 V 40-60 Hz	special voltage upon request
actuation	DC direct-current magnet	
	AC direct-current magnet with integrated rectifier	above 100 °C with separate rectifier
insulating rating	H 180°C	
protection	IP65	
energized duty rating	ED 100%	
connection	plug acc. DIN EN 175301-803 form A, 4 positions x90° / wire diameter 6-8 mm	terminal box M16x1,5
optional	M12x1 connector acc. DESINA	connector acc. VDMA
additional equipment	illuminated plug with varistor	
current consumption	N-coil DC 24 V 1,60 A	
	AC 230 V 40-60 Hz 0,15 A	
	H-coil	DC 24 V 2,30 A
		AC 230 V 40-60 Hz 0,24 A
explosion proof		
limit switches	inductive (I)	normally open-PNP
	inductive (B)	normally open-PNP
	mechanical	single pole double throw-SPDT



 The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

 If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard  
 ■ specifications highlighted in grey are optional

type **MK 15**

function: **NC**  
closed when not energized

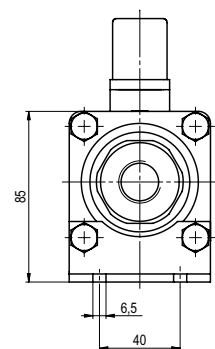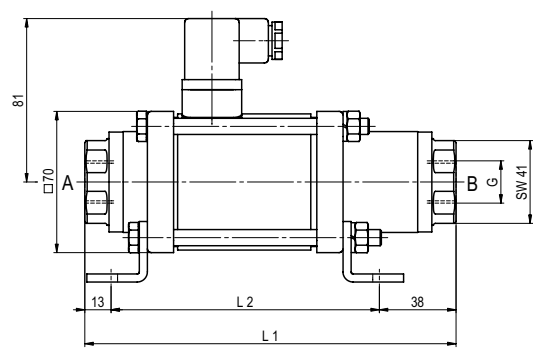

constructive length	L1	L2	L3
standard	184	133	241
with 1/2 inductive limit switches	224	173	281
with manual emergency (Hd)/ Hd and 1/2 ind. limit switches	224	173	281
with mechanical limit switches	224	173	281

flanges PN	DIN	ØD	Øk	Ød
16	EN 1092-1	95	65	14
40	EN 1092-1	95	65	14
100	EN 1092-1	105	75	14

type **FK 15**

function: **NO**  
open when not energized

