

# VTY20



## VTY20




### Your advantages

Series	VTY20
	<p>Low wear and extremely long durability due to high quality bearing</p> <p>Practically no deviation in mass production due to fixed pulse rate, wide measuring span (up to 1:60),</p> <p>Insensitive against water hammers, proven in numerous mass production applications</p> <p>High measuring accuracy, mostly independent of fitting position due to integrated flow straightener</p>

### Technical data


<b>Material pipe section</b>	Brass or stainless steel
<b>Flow range</b>	1...60 l/min
<b>Accuracy</b>	±1 % of range ±1 % of reading
<b>Repeatability</b>	±1 %
<b>Signal output</b>	From 0.8 l/min
<b>Medium temperature</b>	0...90 °C
<b>Ambient temperature</b>	0...70 °C
<b>Pressure rating</b>	PN 16
<b>Nominal diameter</b>	DN 20
<b>Process connection</b>	G 1 male thread
<b>Sensor</b>	Hall effect sensor
<b>Output signal</b>	Square wave - frequency signal, NPN open collector
<b>Pulse duty ratio</b>	50:50
<b>Pulse rate / K-factor</b>	119 pulses/l
<b>Electrical connection</b>	80 mm single wire with Molex Mini-Fit® Jr. plug connector (part number 39-01-4036) optional: 0.5 m PVC cable
<b>Power supply</b>	4.5...24 VDC
<b>Pressure drop</b>	0.33 bar (at Q = 60 l/min)

### Approvals


	<b>Available for:</b> Brass version
 	<b>Available for:</b> VY2060MKHNX1A5 VY2060MKHN05A5

Plastic parts and O-Ring comply with KTW-guidance or the Elastomer Guideline of the German Federal Environmental Agency


**Typical pressure drop**

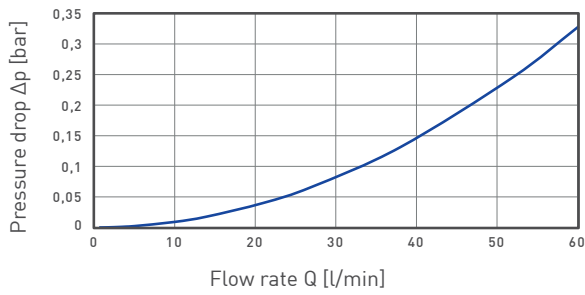


**Characteristic curve**

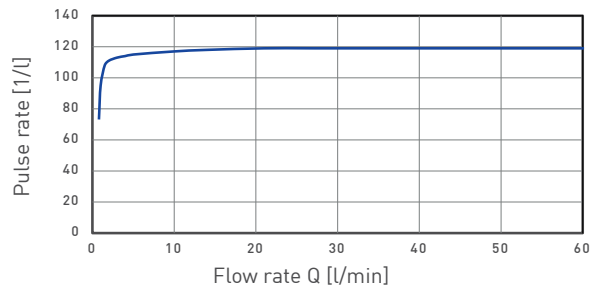

**VTY20**

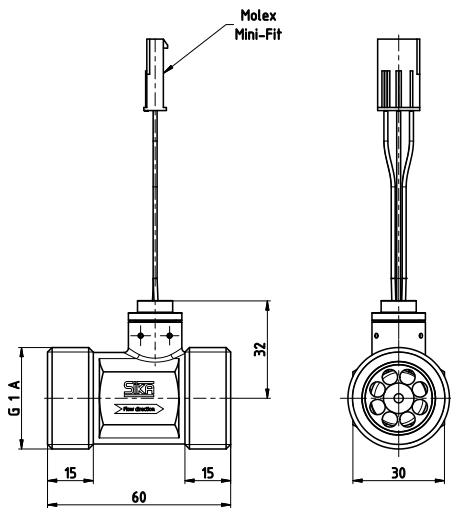

**Alternative electrical connection**



Materials in contact with fluid	
<b>Pipe section</b>	Brass CW617N or stainless steel 1.4308
<b>Turbine cage</b>	PPE+PS Noryl™ 30 % glass fibre reinforced
<b>Rotor</b>	PPE+PS Noryl™ 30 % glass fibre reinforced
<b>Magnet</b>	Hard ferrite
<b>Shaft</b>	Stainless steel 1.4305 / Tungsten carbide
<b>Axial bearing</b>	Sapphire
<b>Radial bearing</b>	PEEK Victrex™

Order code		
<b>Type</b>		
VTY20, brass		VY2060MAHN
VTY20, stainless steel		VY2060VAHN
<b>Electrical connection</b>		
80 mm single wire with Molex Mini-Fit® Jr. plug connector		X1A5
0.5 m PVC-cable		05A5
<b>Example order number</b>	<b>VY2060MAHN</b>	<b>X1A5</b>

Minimum lot size 60 pieces